



Oras Saga

INSTALLATION AND MAINTENANCE GUIDE




4-9



10-12




12



13-19



20





21-26



3930

I (ISO 3822)
EN 817
50 - 1000 kPa
0.18 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +80°C

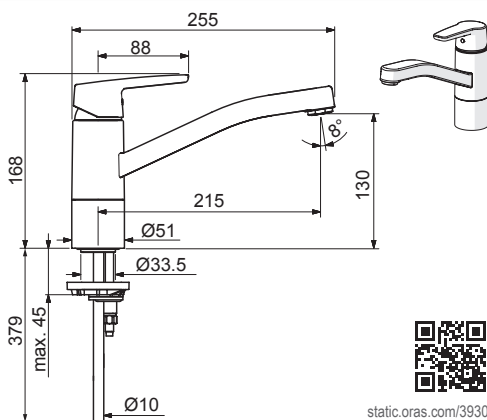

static.oras.com/3930





1444 KIWA Sverige 1913



3930F

I (ISO 3822)
EN 817
50 - 1000 kPa
0.16 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +80°C

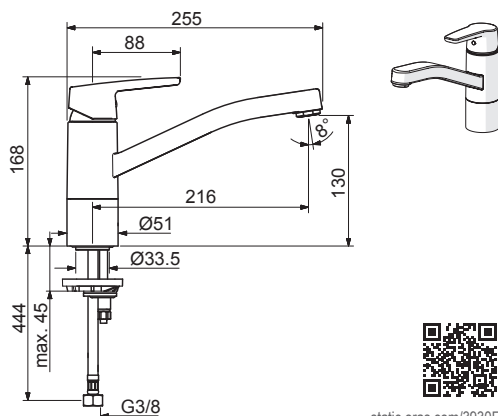

static.oras.com/3930F





1444 KIWA Sverige 1913



3935

I (ISO 3822)
EN 817
50 - 1000 kPa
0.18 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +80°C

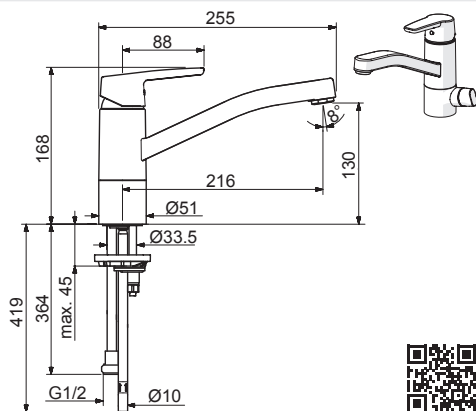

static.oras.com/3935





1444 KIWA Sverige 1913



3935F

I (ISO 3822)
EN 817
50 - 1000 kPa
0.16 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +80°C

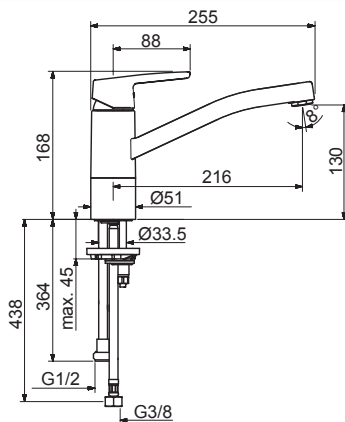

static.oras.com/3935F





1444 KIWA Sverige 1913



3933

I (ISO 3822)
EN 817
50 - 1000 kPa
0.19 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +80°C

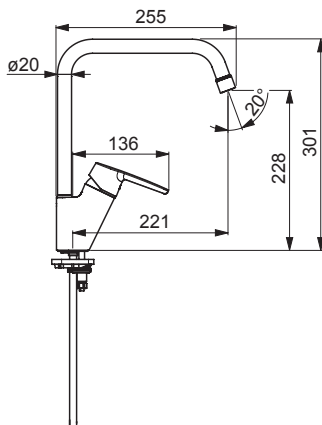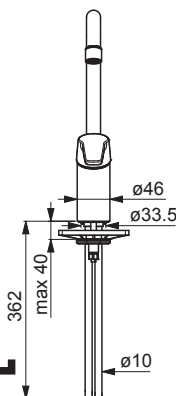

static.oras.com/3933






1444 KIWA Sverige 1913



3933F

I (ISO 3822)
EN 817
50 - 1000 kPa
0.17 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +80°C

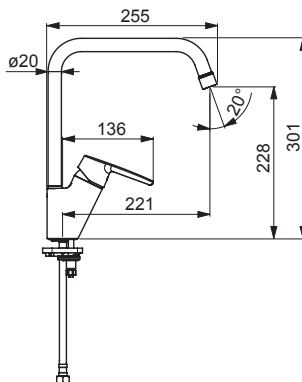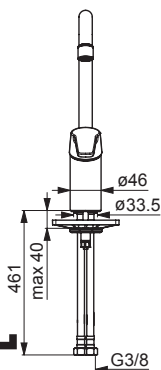

static.oras.com/3933F





1444 KIWA Sverige 1913





3934



I (ISO 3822)
50 - 1000 kPa
0.22 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +80°C

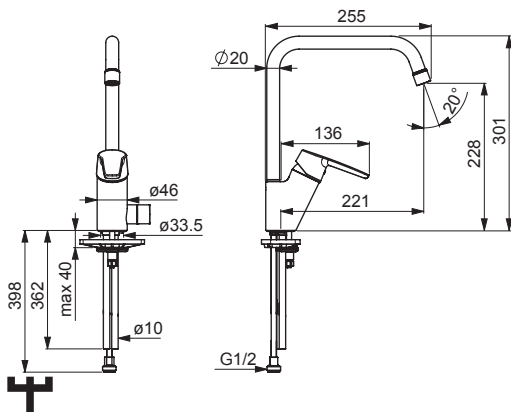

static.oras.com/3934

3934F



I (ISO 3822)
EN 817
50 - 1000 kPa
0.18 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +80°C

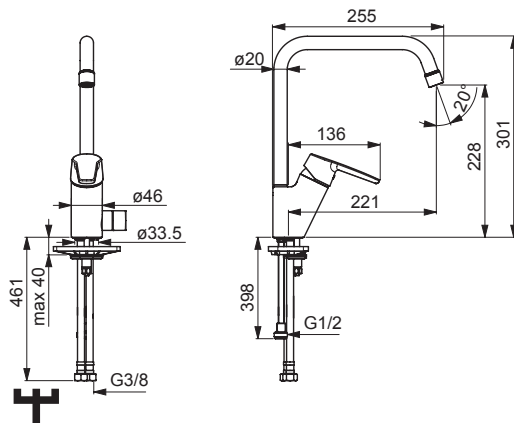

static.oras.com/3934F

3931F



I (ISO 3822)
EN 817
50 - 1000 kPa
0.16 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +80°C

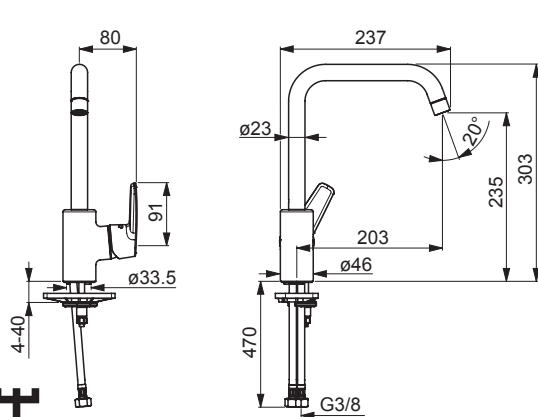

static.oras.com/3931F

3936F

I (ISO 3822)
 EN 817
 50 - 1000 kPa
 0.16 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +80°C

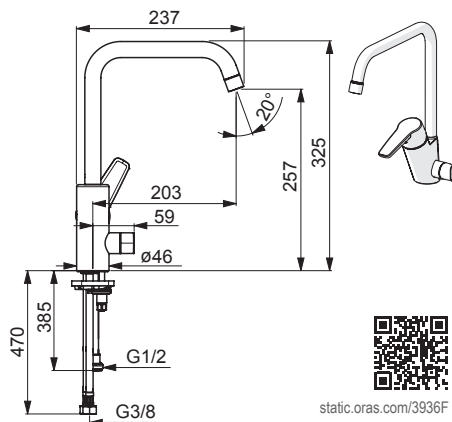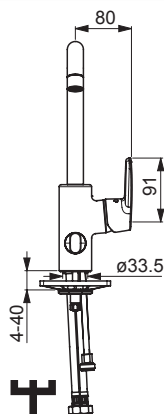

1444 KIWA Sverige 1913




static.oras.com/3936F



3930FH


EN 817
50 - 1000 kPa
0.16 l/s (300 kPa)
max. +80°C

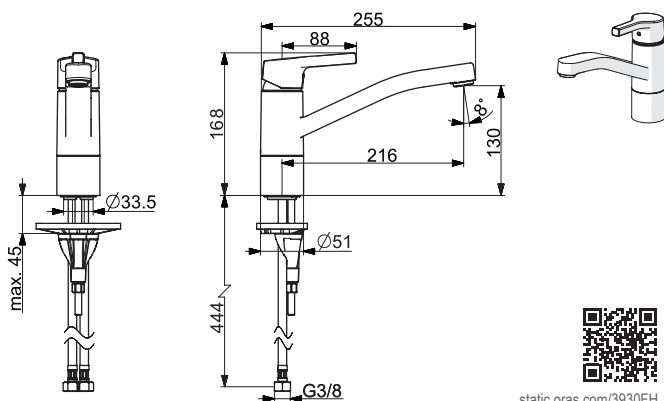

static.oras.com/3930FH

3935FH


EN 817
50 - 1000 kPa
0.16 l/s (300 kPa)
max. +80°C

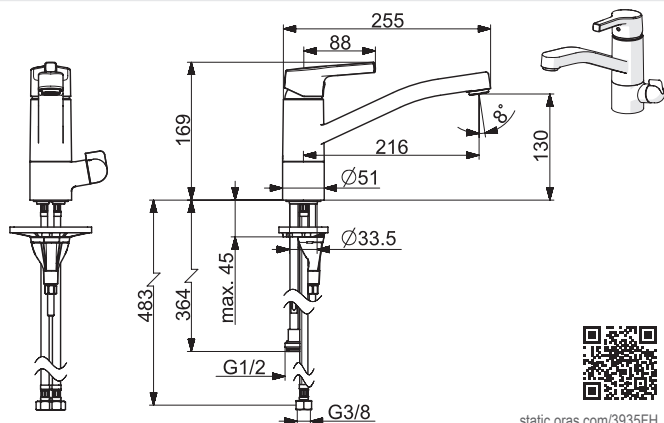

static.oras.com/3935FH

3933FH


EN 817
50 - 1000 kPa
0.17 l/s (300 kPa)
max. +80°C

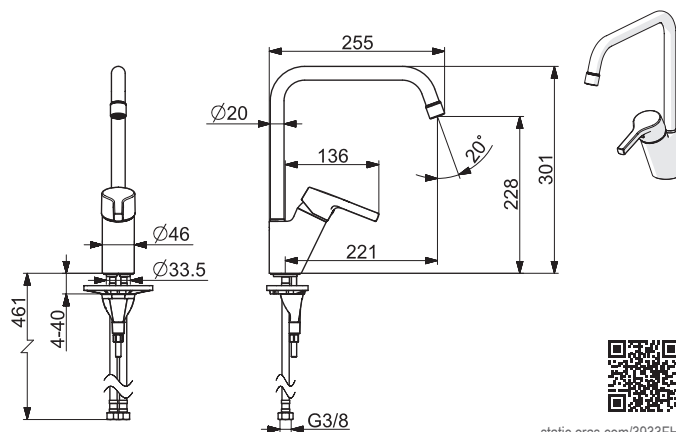

static.oras.com/3933FH

3934FH


EN 817
50 - 1000 kPa
0.19 l/s (300 kPa)
max. +80°C

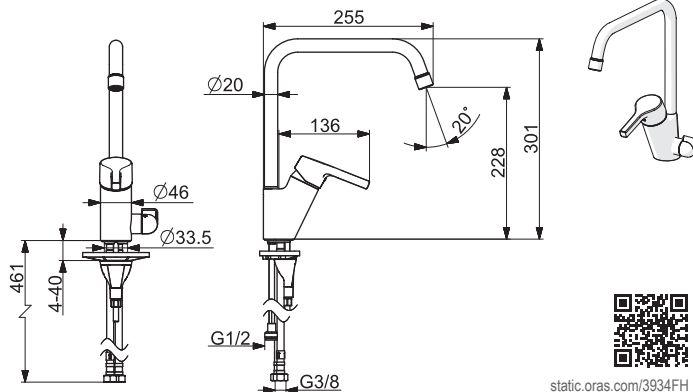

static.oras.com/3934FH

3931FH


EN 817
50 - 1000 kPa
0.16 l/s (300 kPa)
max. +80°C

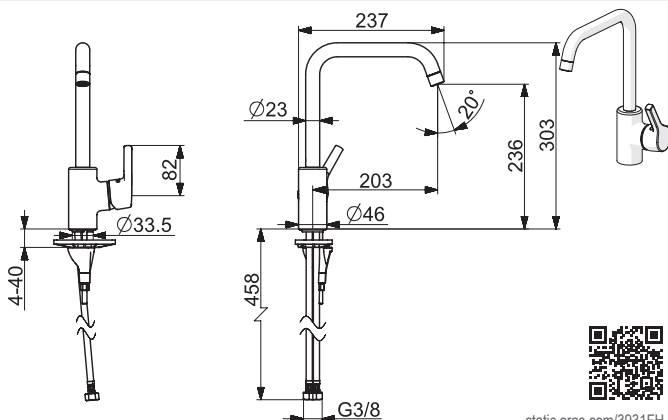





static.oras.com/3931FH

3936FH




EN 817
50 - 1000 kPa
0.16 l/s (300 kPa)
max. +80°C

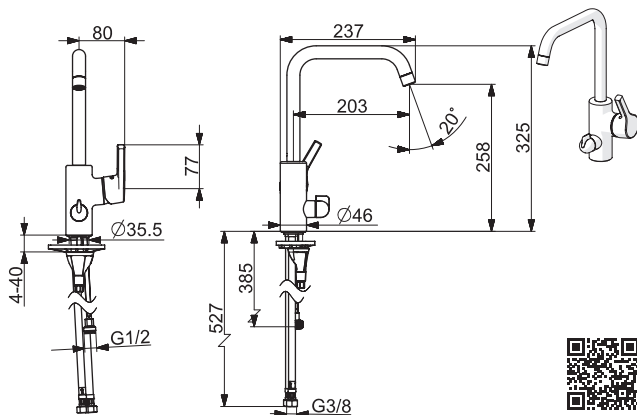


static.oras.com/3936FH








A

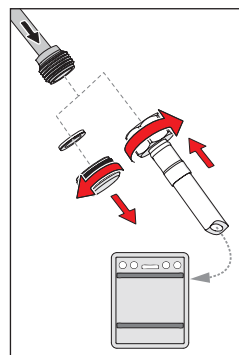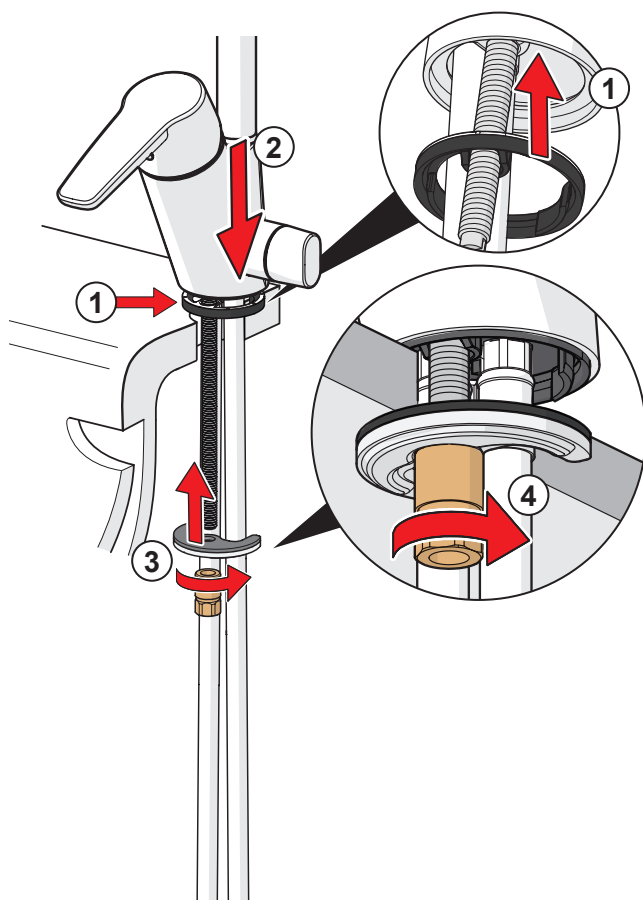



B


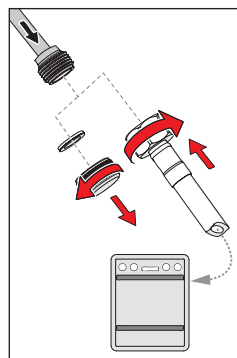


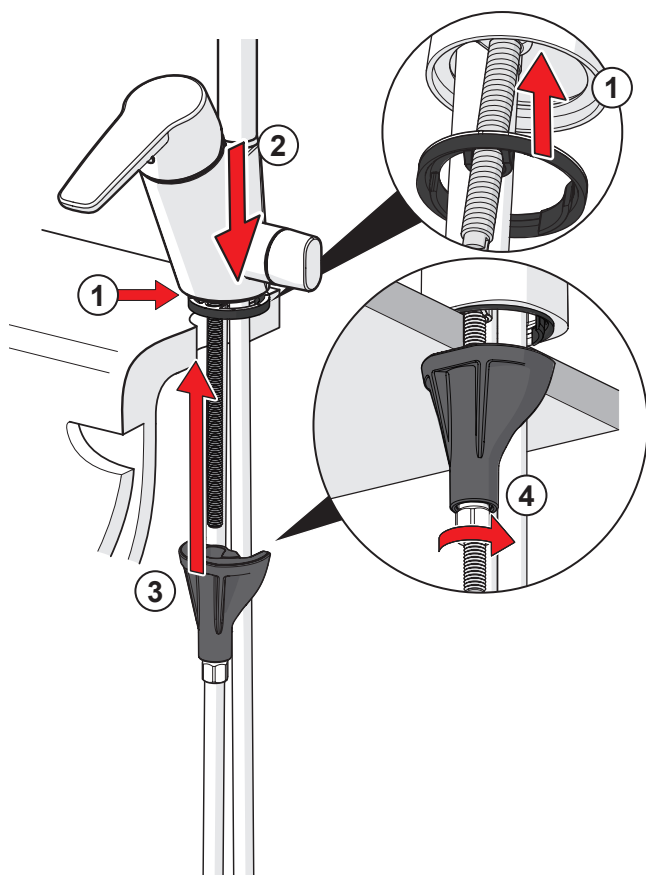




①


max.
1600 kPa

2

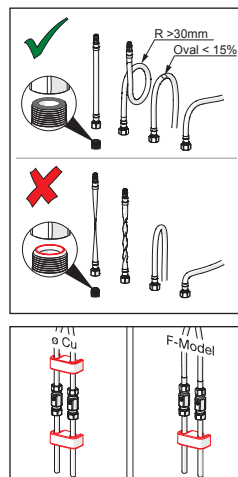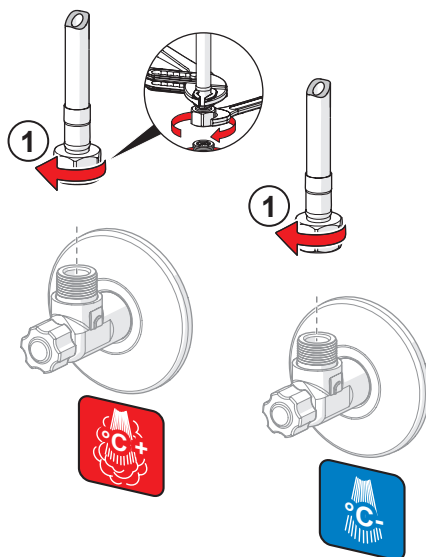









②







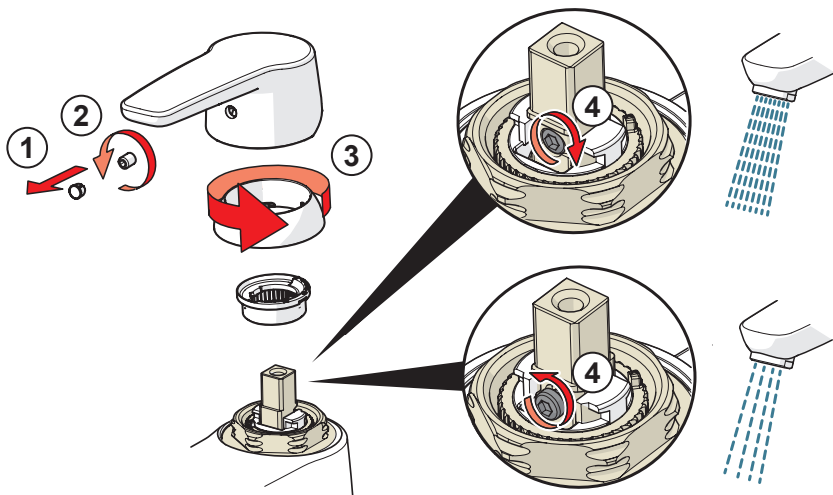



②

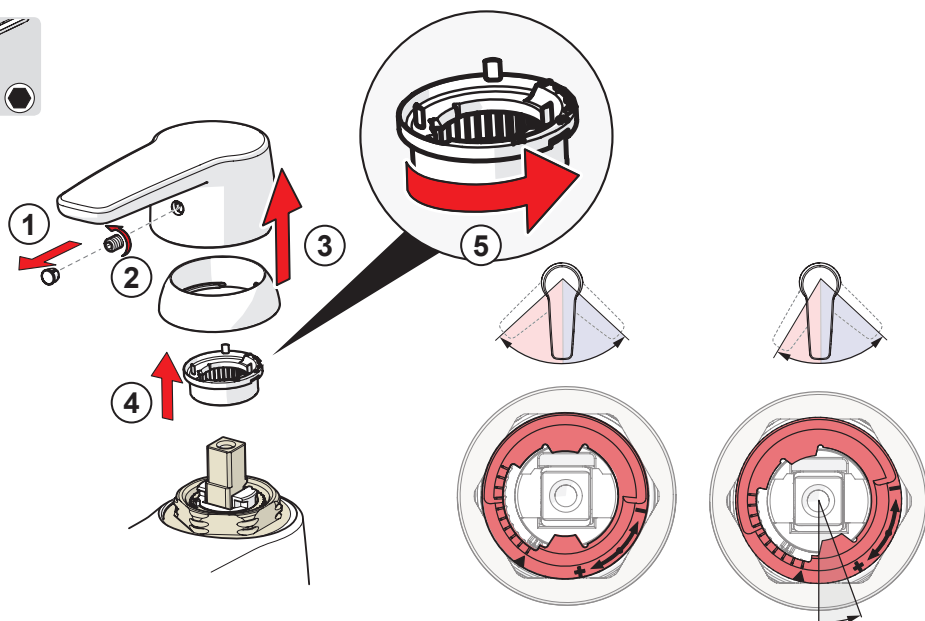


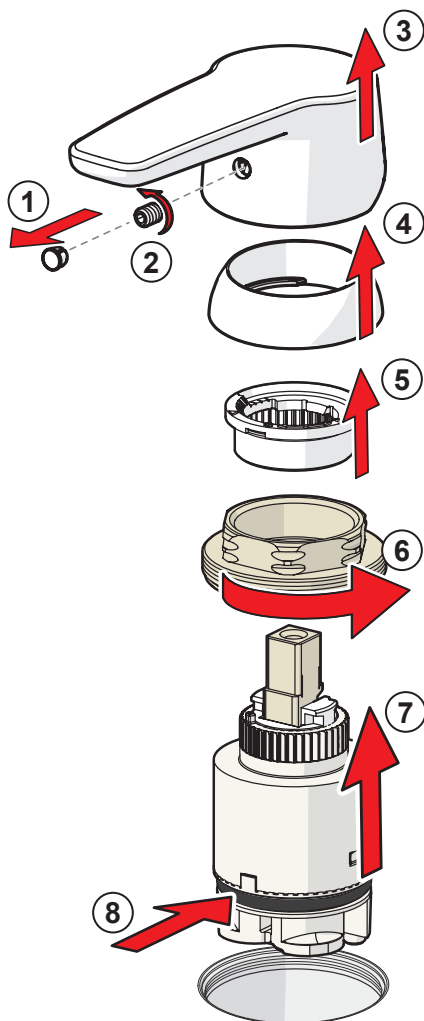




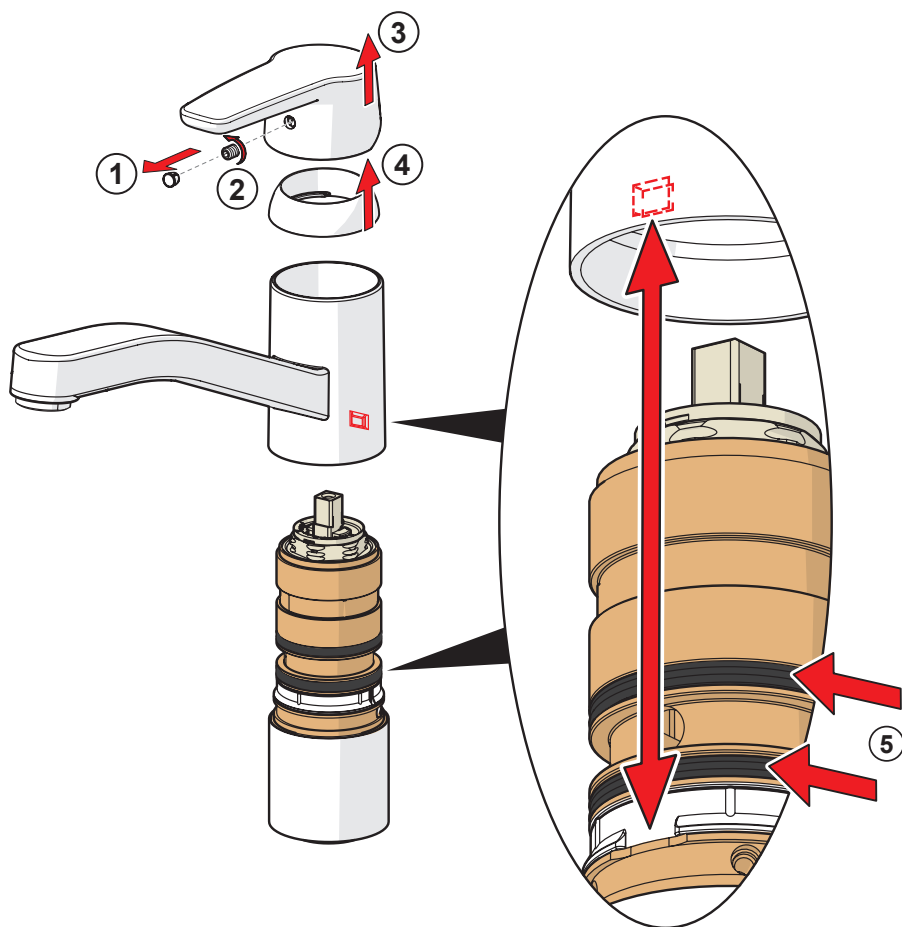

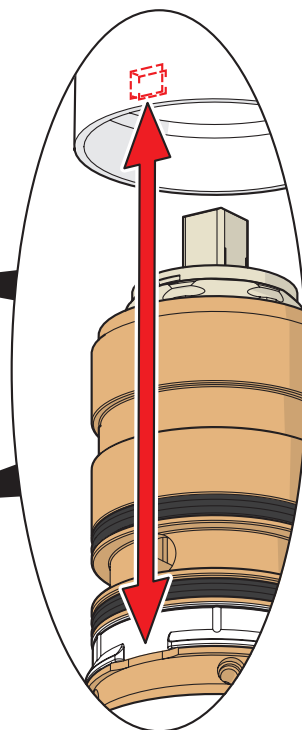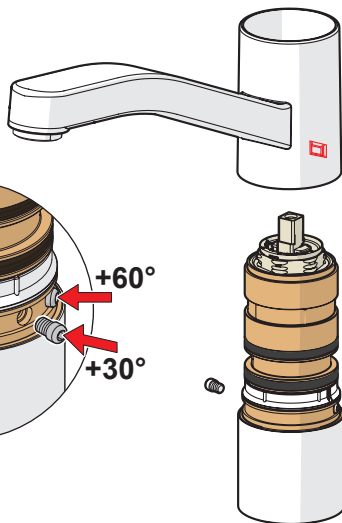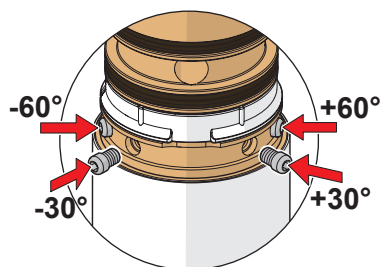









③

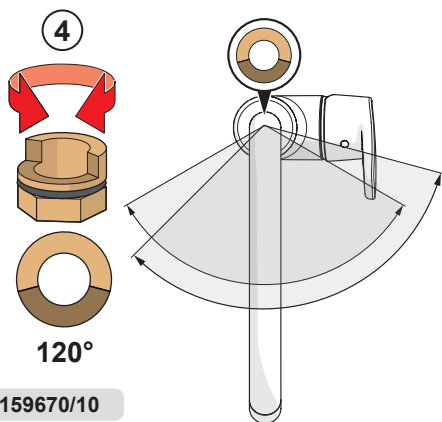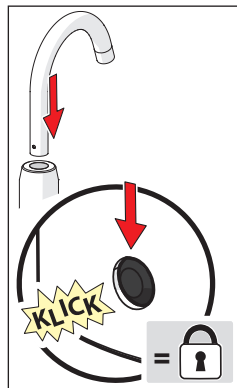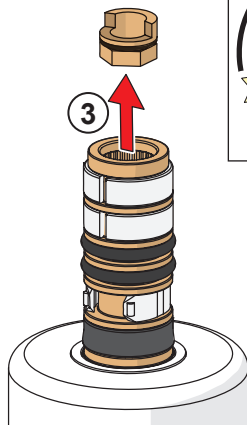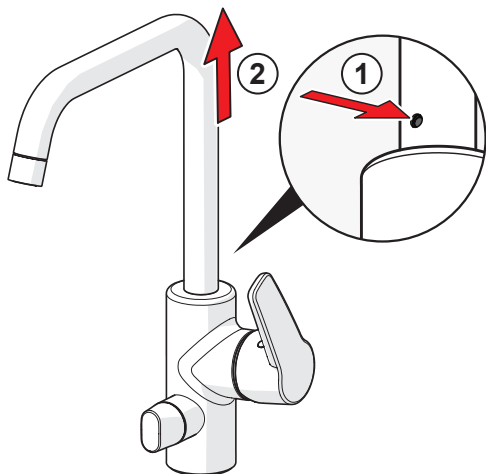

159670/10


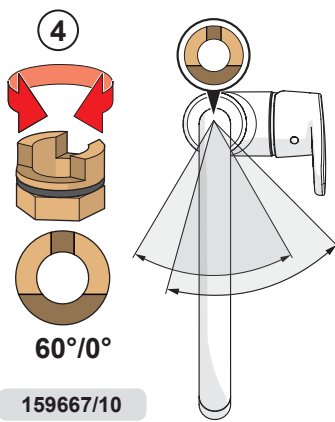




159667/10

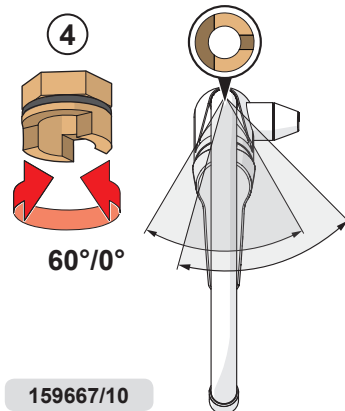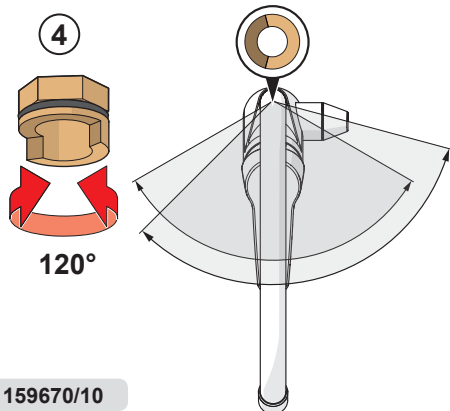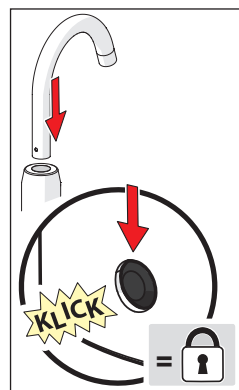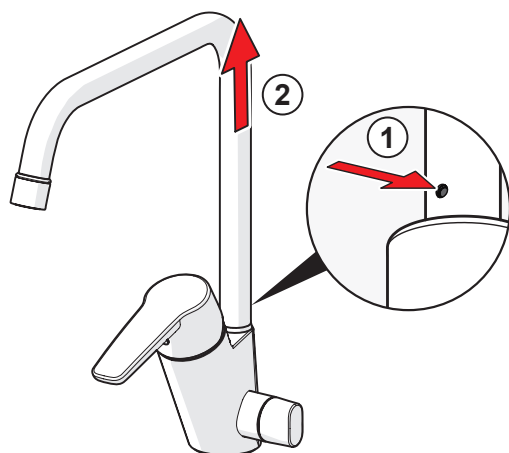

159670/10

159667/10

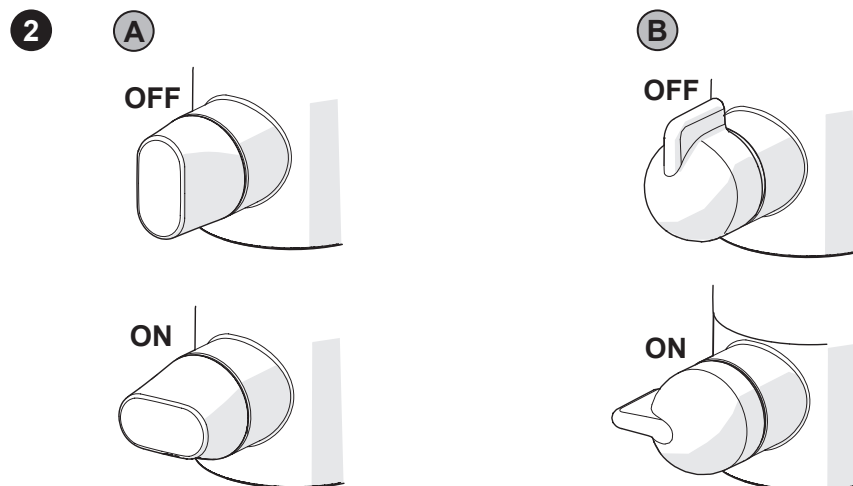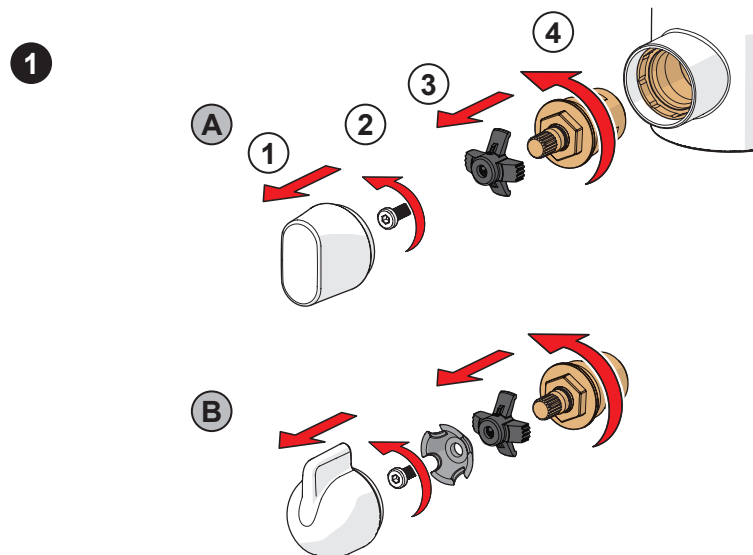


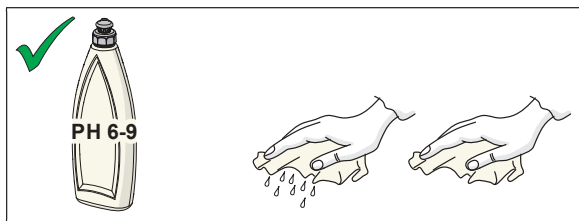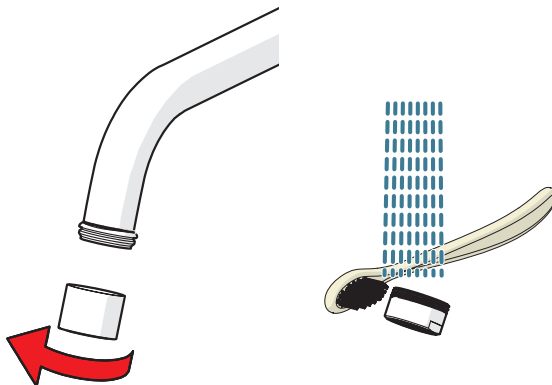

CLEANING.ORAS.COM


3930 , 3930F

- 1 1000801V
- 2 601967V
- 3 601973V
- 4 601979V
- 5 601969V
- 6 1000832V
- 7 602064V
- 8 601983V
- 9 1000980/2
- 10 601982V
- 11 601970V
- 12 601985V
- 13 158825

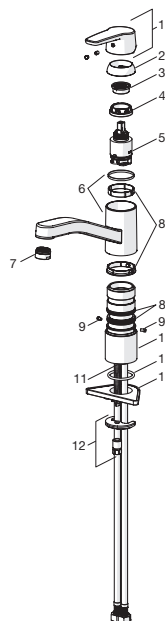

3935 , 3935F


- 1 1000801V
- 2 601967V
- 3 601973V
- 4 601979V
- 5 601969V
- 6 1000832V
- 7 602064V
- 8 601983V
- 9 1000980/2
- 10 602600V
- 11 602587V
- 12 601970V
- 13 601985V
- 14 158825

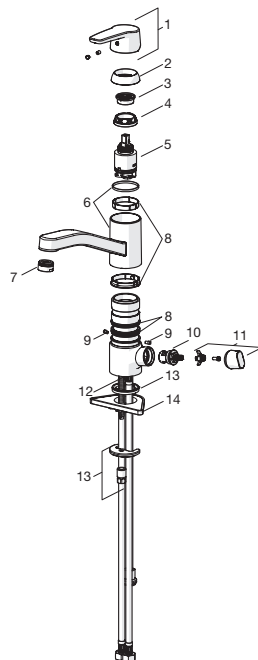




3931F

- 1 1001049V
- 2 1001070V
- 3 159667/10 (0°/60°)
- 3 159670/10 (120°)
- 4 1001098V
- 5 601969V
- 6 601968V
- 7 601973V
- 8 601967V
- 9 1000986V
- 10 601970V
- 11 601985V
- 12 158825

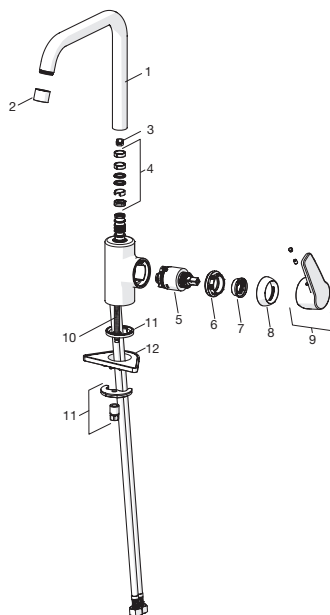

3936F


- 1 1001049V
- 2 1001070V
- 3 159667/10 (0°/60°)
- 3 159670/10 (120°)
- 4 1001098V
- 5 601969V
- 6 601968V
- 7 601973V
- 8 601967V
- 9 1000986V
- 10 602600V
- 11 602587V
- 12 601970V
- 13 601985V
- 14 158825

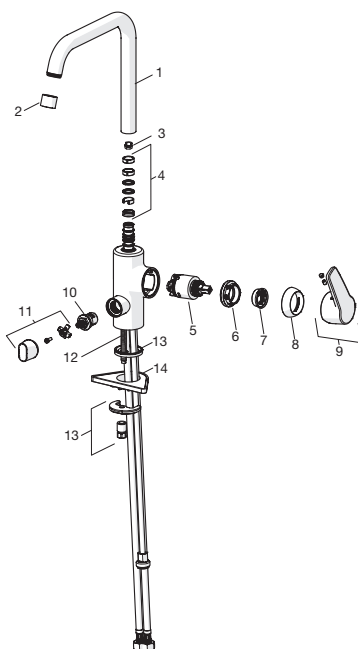




3933 , 3933F

- 1 1001070V
- 2 1000801V
- 3 601967V
- 4 601973V
- 5 601968V
- 6 601969V
- 7 1000228V
- 8 159670/10 (120°)
- 8 159667/10 (60°/0°)
- 9 198287V
- 10 601970V
- 11 601985V
- 12 158825

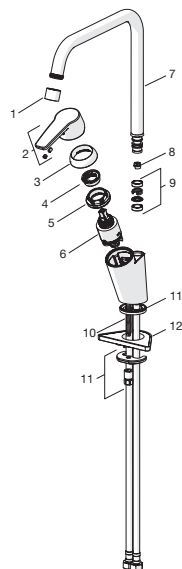

3934 , 3934F


- 1 1001070V
- 2 1000801V
- 3 601967V
- 4 601973V
- 5 601968V
- 6 601969V
- 7 1000228V
- 8 159670/10 (120°)
- 8 159667/10 (60°/0°)
- 9 198287V
- 10 602600V
- 11 1000240V
- 12 602587V
- 13 601970V
- 14 601985V
- 15 158825

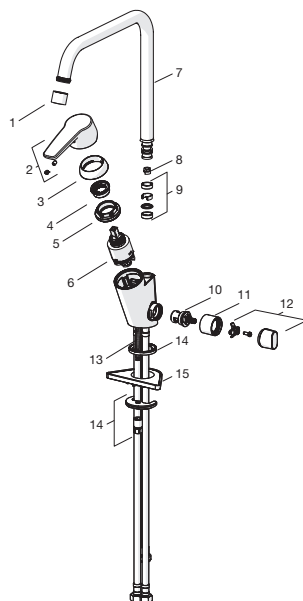




3930FH

- 1 1005671V
- 2 601967V
- 3 601973V
- 4 601979V
- 5 601969V
- 6 1000832V
- 7 602064V
- 8 601983V
- 9 1000980/2
- 10 601982V
- 11 1002371V
- 12 158825
- 13 1000780V
- 14 602610V

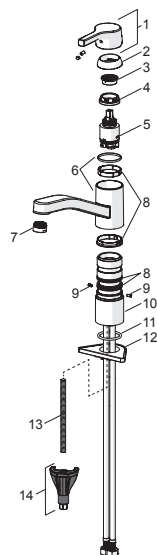


3935FH

- 1 1005671V
- 2 601967V
- 3 601973V
- 4 601979V
- 5 601969V
- 6 1000832V
- 7 602064V
- 8 601983V
- 9 1000980/2
- 10 602600V
- 11 1005697V
- 12 1002371V
- 13 158825
- 14 1000780V
- 15 602610V

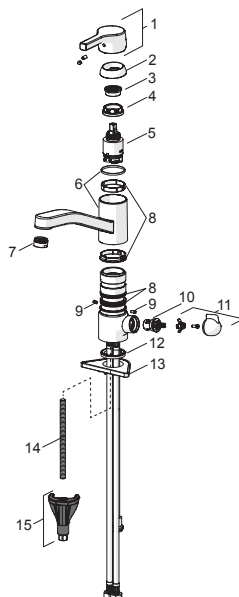


3931FH

- 1 1001070V
- 2 1001049V
- 3 159670/10 (120°)
- 3 159667/10 (0°/60°)
- 4 1001098V
- 5 601969V
- 6 601968V
- 7 601973V
- 8 601967V
- 9 1005672V
- 10 1000780V
- 11 602610V
- 12 1002371V
- 13 158825

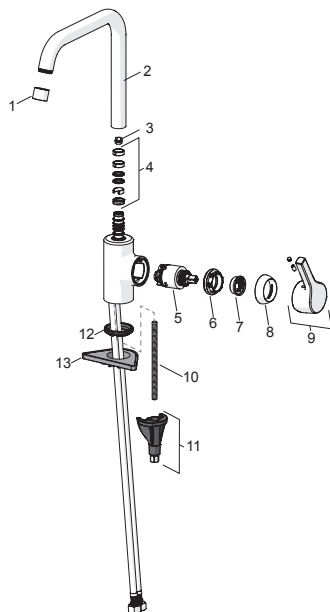

3936FH


- 1 1001070V
- 2 1001049V
- 3 159667/10 (0°/60°)
- 3 159670/10 (120°)
- 4 1001098V
- 5 601969V
- 6 601968V
- 7 601973V
- 8 601967V
- 9 1005672V
- 10 1002371V
- 11 158825
- 12 602600V
- 13 1000240V
- 14 1005697V
- 15 1000780V
- 16 602610V

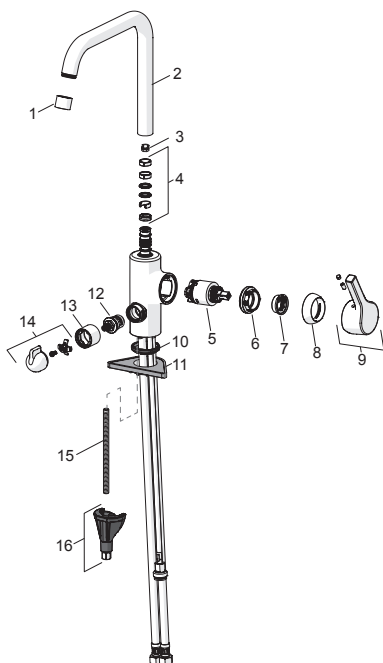




3933FH

- 1 1001070V
- 2 1005671V
- 3 601967V
- 4 601973V
- 5 601968V
- 6 601969V
- 7 1000228V
- 8 159670/10 (120°)
- 8 159667/10 (60°/0°)
- 9 198287V
- 10 1002371V
- 11 158825
- 12 1000780V
- 13 602610V

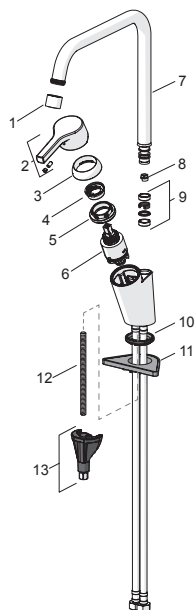

3934FH

- 1 1001070V
- 2 1005671V
- 3 601967V
- 4 601973V
- 5 601968V
- 6 601969V
- 7 1000228V
- 8 159670/10 (120°)
- 8 159667/10 (60°/0°)
- 9 198287V
- 10 602600V
- 11 1000240V
- 12 1005697V
- 13 1002371V
- 14 158825
- 15 1000780V
- 16 602610V

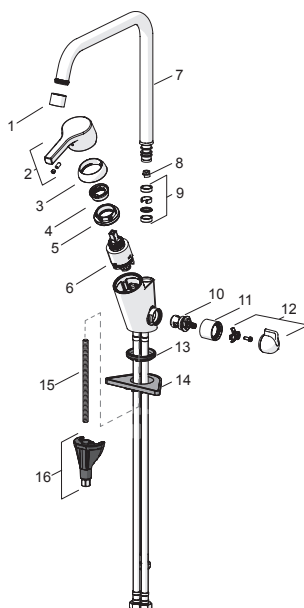

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands, Oras and Hansa.

The head office of the Group is located in Rauma, Finland, and the Group has four manufacturing sites: Burglengenfeld (Germany), Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1400 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

ORAS GROUP
Isometsäntie 2, P.O. Box 40
FI-26101 Rauma
Tel. +358 2 83 161
Fax +358 2 831 6300
info.finland@oras.com
www.oras.com

