

# Инструкция по эксплуатации

Аккумуляторные листовые ножницы 14.4V Makita  
BJS160RFE

Цены на товар на сайте:

[http://makita.vseinstrumenti.ru/instrument/akkumulyatornyi/nozhnitsy/akkumulyatornye\\_listovye\\_nozhnitsy\\_makita\\_bjs160rfe/](http://makita.vseinstrumenti.ru/instrument/akkumulyatornyi/nozhnitsy/akkumulyatornye_listovye_nozhnitsy_makita_bjs160rfe/)

Отзывы и обсуждения товара на сайте:

[http://makita.vseinstrumenti.ru/instrument/akkumulyatornyi/nozhnitsy/akkumulyatornye\\_listovye\\_nozhnitsy\\_makita\\_bjs160rfe/#tab-Responses](http://makita.vseinstrumenti.ru/instrument/akkumulyatornyi/nozhnitsy/akkumulyatornye_listovye_nozhnitsy_makita_bjs160rfe/#tab-Responses)

# High cutting performance



Cuts up to 1.6mm (16Ga) thick mild steel sheet; capable of cutting a layer of two 0.8mm (22Ga) thick roofing metal sheets in a single pass.

## Max cutting capacity

Steel up to 400 N/mm<sup>2</sup> : 1.6mm  
Steel up to 600 N/mm<sup>2</sup> : 1.2mm  
Aluminum up to 200 N/mm<sup>2</sup> : 2.5mm

**Lightweight**  
**1.9kg 2.0kg**

(Model BJS160) (Model BJS161)

On-tool storage for hex wrench



**Compact: 362mm (14-1/4")**

Powered by Li-ion Battery

**BJS161:**  
**BL1830**  
**(18V/3.0Ah)**



**BJS160:**  
**BL1430**  
**(14.4V/3.0Ah)**



Photo: BJS161

Externally accessible carbon brush


Easy-to-operate slide-type on/off switch with lock-on function

Easy-to-grip motor housing

- Small circumference for easy handling
- Rubberized soft grip for more comfort and better control with minimized hand fatigue and pain.

## Easy and fine cutting

- Double cutting mechanism for less workpiece deformation than single blade cutting.
- The blade clearance can be adjusted according to thicknesses of workpiece so that cutting surface is fine without burrs.

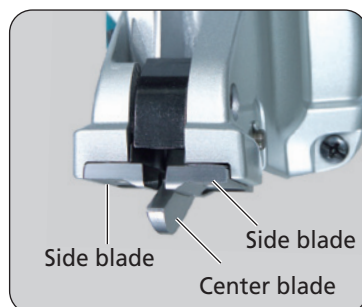

Side blade Side blade  
Center blade

## Anti-restart function (with warning lamp)

The motor does not start up if battery is inserted with the switch locked on. In this case, the lamp starts blinking slowly, indicating that the Anti-restart function is on.

## Battery capacity warning lamp

When remaining battery capacity decreases below a certain limit, the motor automatically stops and solid red light reminds you to replace battery.

## Anti-restart function process

Inserts battery with slide switch is ON



Warning lamp starts blinking

NO START UP by working Anti-restart function

## Accessories

### Fast Charger

DC18RA  
Charging time approx. 22 minutes



### Center blade

Part No. 792534-4



### Side blade set

Part No. 792533-6



## Cordless Straight Shear



Carrying Case



## BJS160 / BJS161 1.6mm (16Ga)

430 mm

|                          |                                                                                                                                        |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Capacity                 | Steel up to 400 N/mm <sup>2</sup> : 1.6mm<br>Steel up to 600 N/mm <sup>2</sup> : 1.2mm<br>Aluminum up to 200 N/mm <sup>2</sup> : 2.5mm |
| Strokes per minute (spm) | 4,300                                                                                                                                  |
| Dimensions (L x W x H)   | 362 x 78 x 103mm (14-1/4" x 3-1/16" x 4-1/16") BJS160<br>362 x 78 x 118mm (14-1/4" x 3-1/16" x 4-5/8") BJS161                          |
| Net weight               | 1.9kg (4.2lbs) BJS160<br>2.0kg (4.4lbs) BJS161                                                                                         |
| Voltage                  | 14.4V BJS160<br>18V BJS161                                                                                                             |

### Standard Equipment

Fast Charger, Battery Cartridge, Hex wrench, Thickness gauge

Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23469-2 AJ-AI