

Society
Reference
Address
Phone
Fax
E-mail

(499) 390-59-76, 8-916-188-58-08
info@electropumps.ru

1D8411GBD

CM-G 150-1600/A/BAQE/11 IE2

MEI ≥ 0,60

PN 16
-10 °C
140 °C
40 °C



: 0,00 m3/h
: 0,00 m
(%) : 20 °C
: 0,99819 kg/dm3
1,0004 mm2/s
2,20 kPa

Real duty point

:
:
NPSH :
Shaft power P2 :
Efficiency :

250 UNI ISO 185
250 UNI ISO 185
250 UNI ISO 185
SEE "SHAFT SEAL" SECTION
EPDM
AISI 304 X5 Cr Ni 1810 UNI 6900/71

Curve tolerance according to ISO 9906

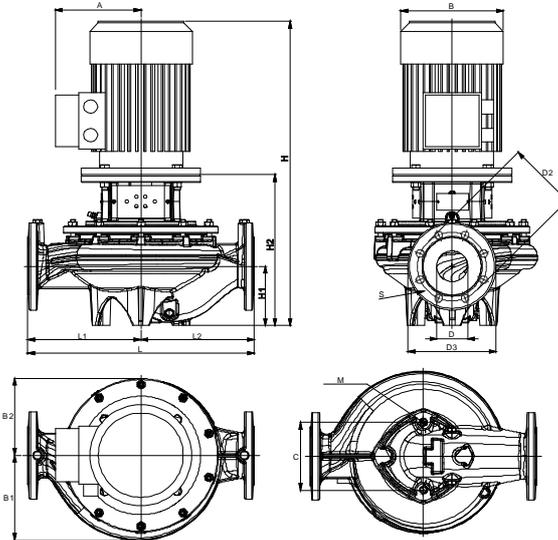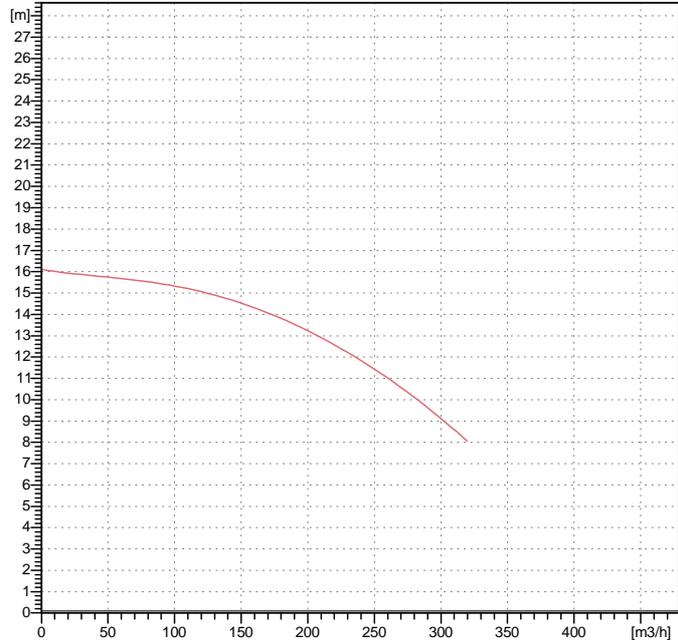

346 kg

Type

Stationary part
Rotating part
Elastomer EPDM

mm					
A	248	H	1042	S	8 x O22
B1	298	H1	215		
B2	239	H2	537		
C	230	L	800		
D	150	L1	400		
D2	240	L2	400		
D3	285	M	M16		

2: 11 kW
1470 1/min
3~ 400 V 50 Hz
21,6 A
IP 55

DN 150 / PN 16
DN 150 / PN 16



WATER • TECHNOLOGY

04/03/18

2 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Society
Reference
Address
Phone
Fax
E-mail

" "
,
(499) 390-59-76, 8-916-188-58-08
-
info@electropumps.ru

CM-G 150-1600/A/BAQE/11 IE2

Curve tolerance according to ISO 9906

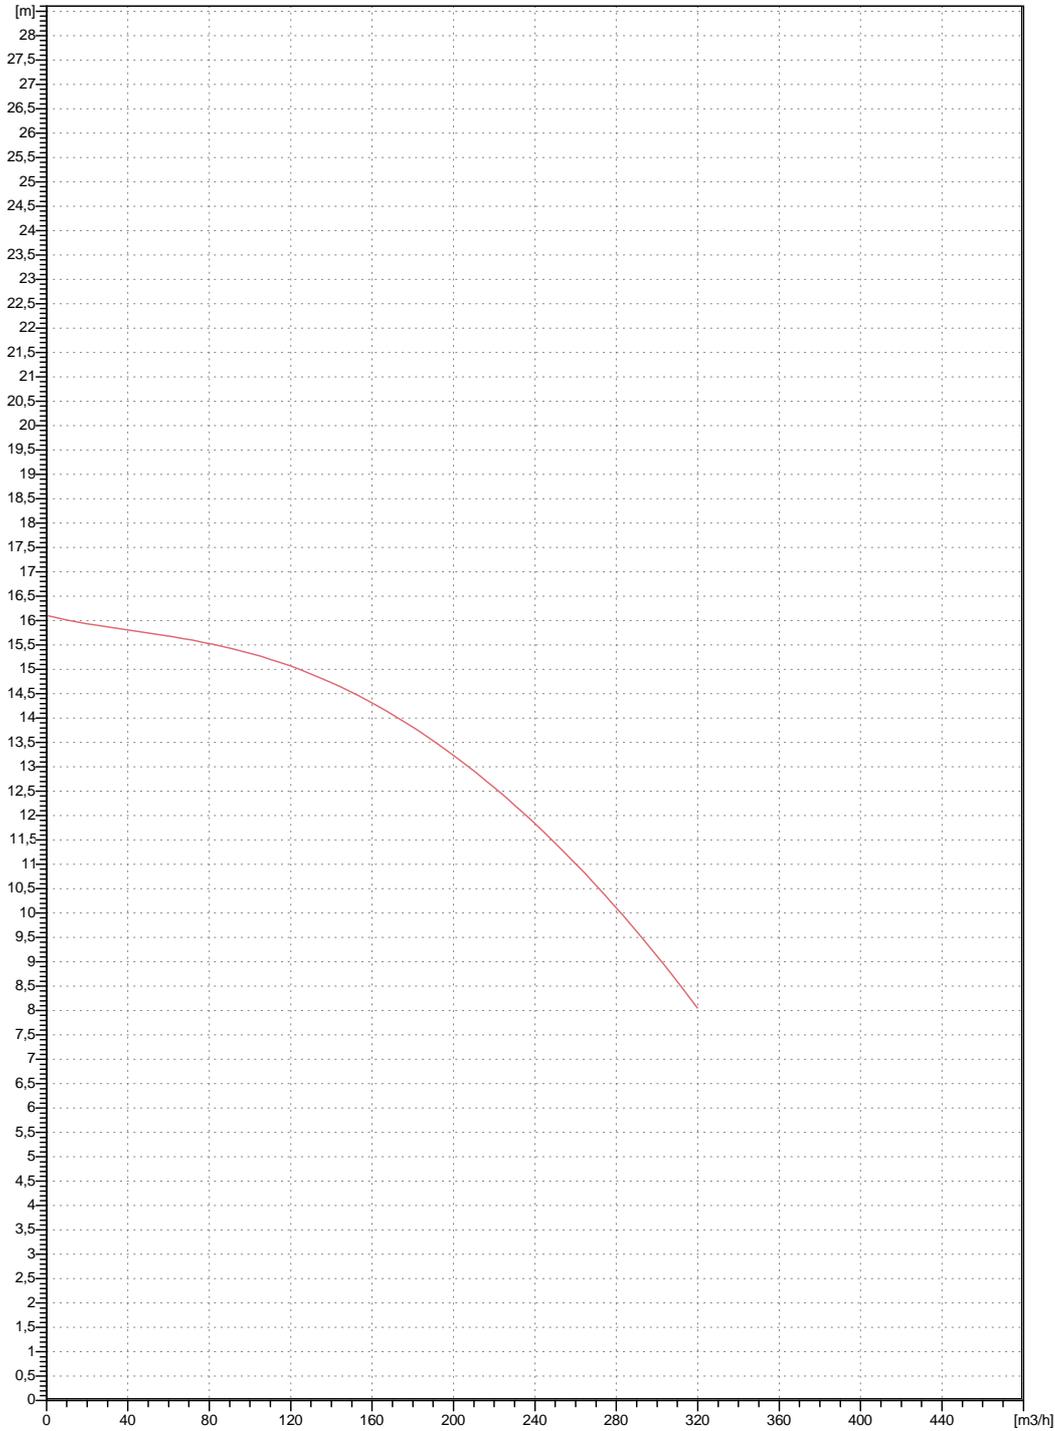

DN 150
PN 16

DN 150
PN 16

0 m³/h

0 m


1470 1/min

04/03/18

Society
Reference
Address
Phone
Fax
E-mail

" "
,
(499) 390-59-76, 8-916-188-58-08
-
info@electropumps.ru

CM-G 150-1600/A/BAQE/11 IE2

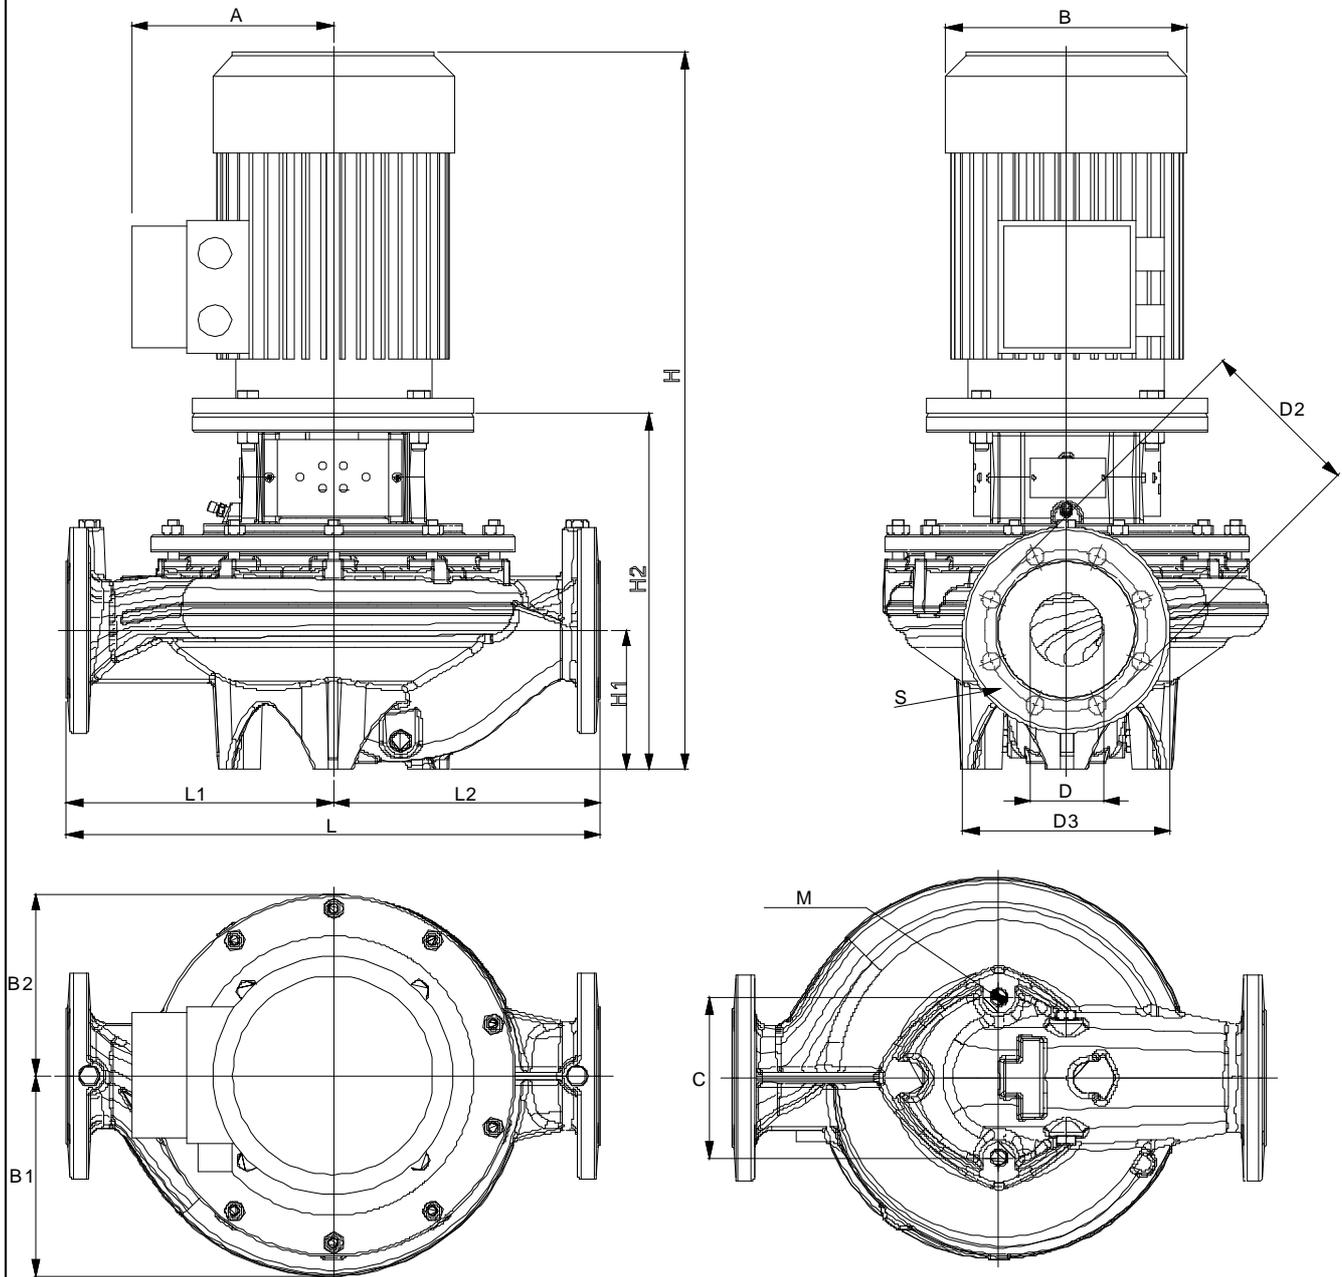

mm					
1	A	248	L	800	
2	B1	298	L1	400	
3	B2	239	L2	400	DN 150 PN 16
4	C	230	M	M16	
5	D	150	S	8 x O22	
6	D2	240			
7	D3	285			DN 150 PN 16
8	H	1042			
9	H1	215			
10	H2	537			