

Society
Reference
Address
Phone
Fax
E-mail

+7-916-188-58-08
+7-499-390-59-76
info@electropumps.ru

1D5311GDV

CP-G 80-5150/A/BAQE/18,5 IE3

MEI ≥ 0,40

PN 16

-10 °C

140 °C

40 °C

0,00 m³/h

0,00 m

(%) :

20 °C

0,99819 kg/dm³

1,0004 mm²/s

2,20 kPa

NPSH :

Shaft power P2 :

Efficiency :

/

250 UNI ISO 185

250 UNI ISO 185



250 UNI ISO 185

Carbon/Graphite

EPDM

AISI 304 X5 Cr Ni 1810 UNI 6900/71

Curve tolerance according to ISO 9906

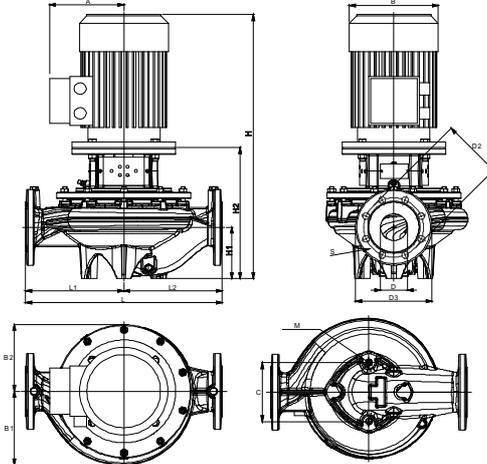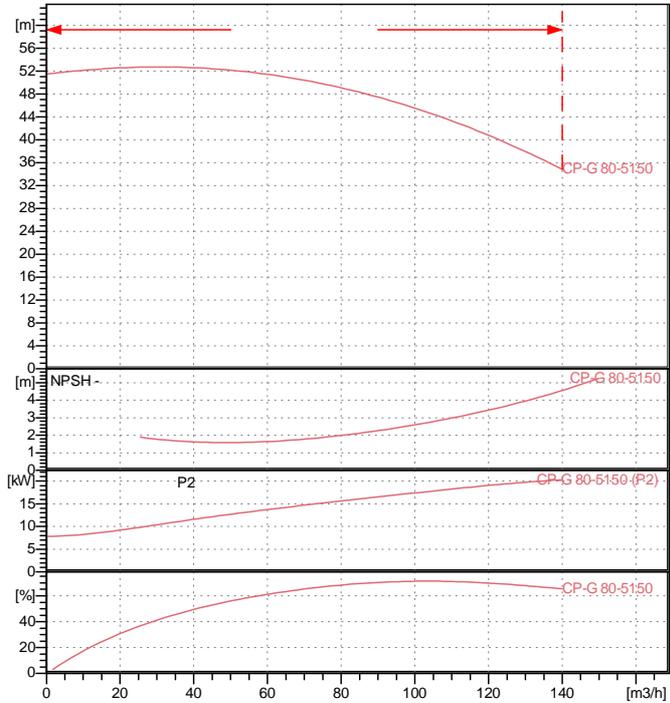

121 kg

mm

A	265	H	937	S	8 x O18
B1	178	H1	115		
B2	176	H2	388		
C	144	L	440		
D	80	L1	220		
D2	160	L2	220		
D3	200	M	M16		

DN 80 / PN 16
DN 80 / PN 16

2: 18,5 kW
2940 1/min
3~ 400 V 50 Hz
32 A
IP 55



02/12/16


2 / 3

DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Society
Reference
Address
Phone
Fax
E-mail

+7-916-188-58-08
+7-499-390-59-76
info@electropumps.ru

CP-G 80-5150/A/BAQE/18,5 IE3
Curve tolerance according to ISO 9906

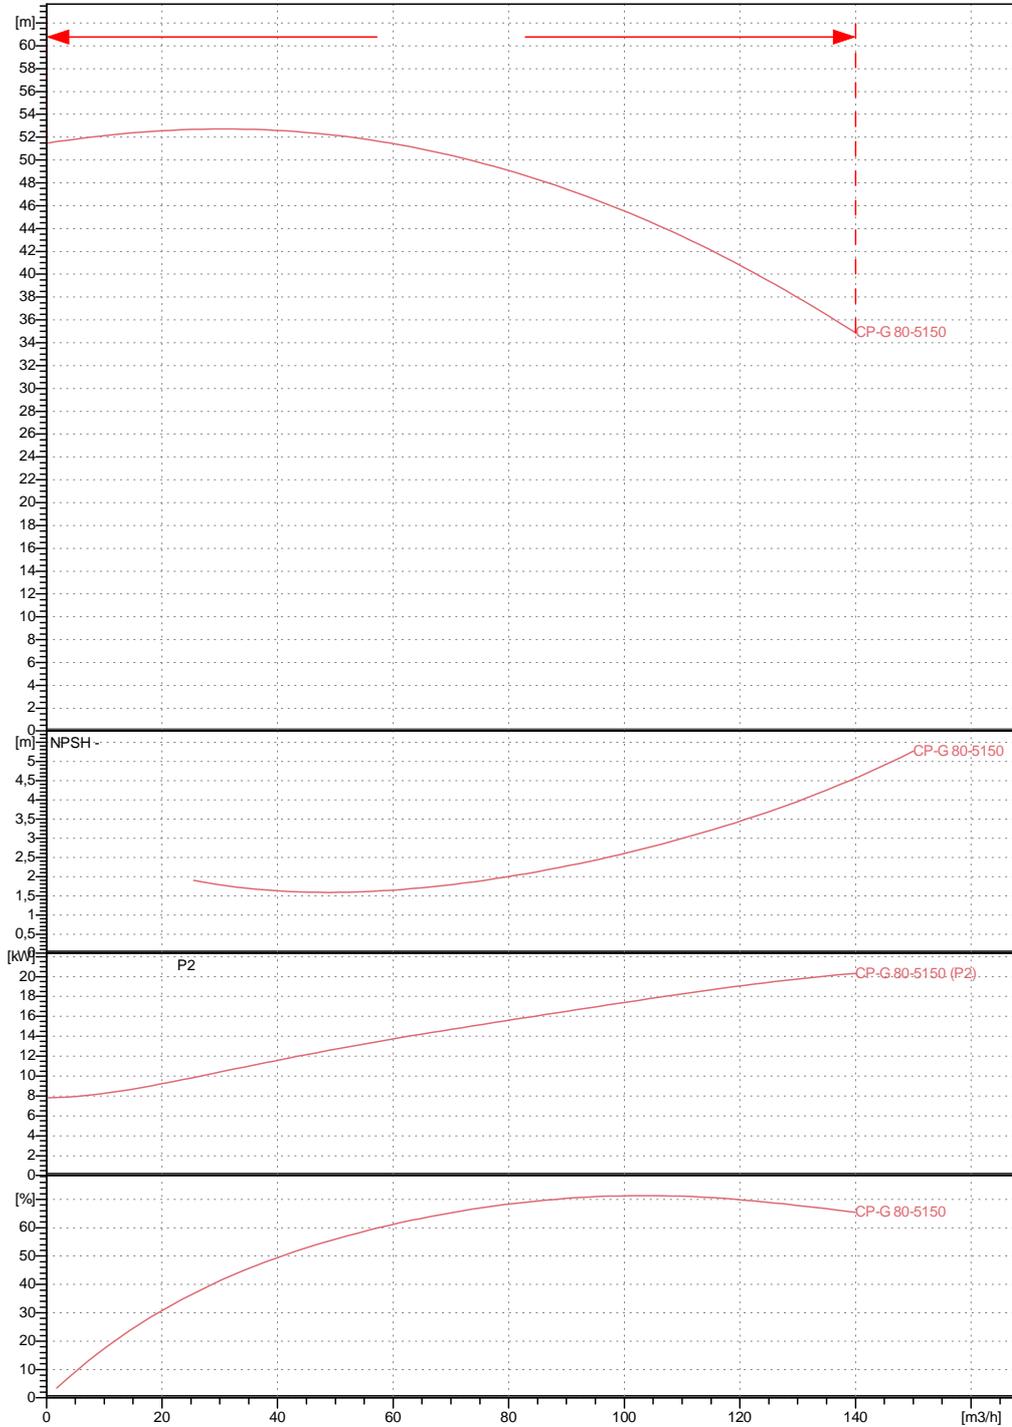

DN 80
PN 16

DN 80
PN 16

0 m³/h

0 m


2940 1/min

02/12/16

Society
Reference
Address
Phone
Fax
E-mail

+7-916-188-58-08
+7-499-390-59-76
info@electropumps.ru

CP-G 80-5150/A/BAQE/18,5 IE3

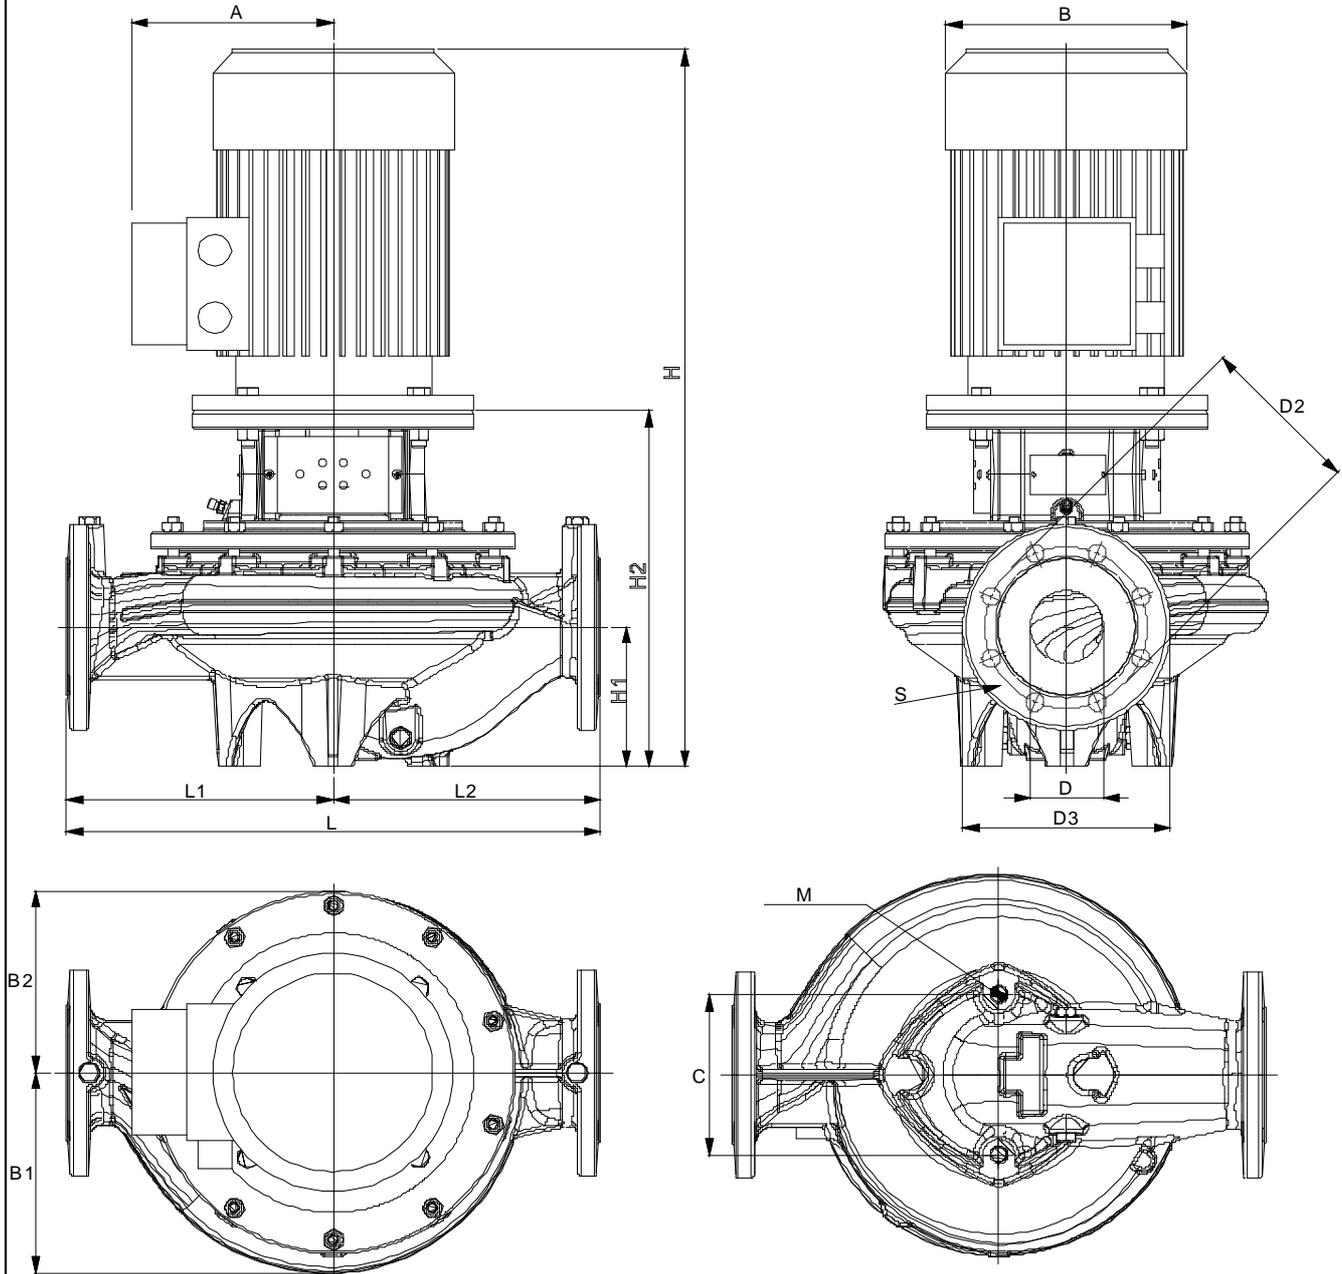

mm					
1	A	265	L	440	
2	B1	178	L1	220	
3	B2	176	L2	220	DN 80 PN 16
4	C	144	M	M16	
5	D	80	S	8 x O18	
6	D2	160			
7	D3	200			DN 80 PN 16
8	H	937			
9	H1	115			
10	H2	388			