




UCC2 Normale Reihe - Нормальная серия

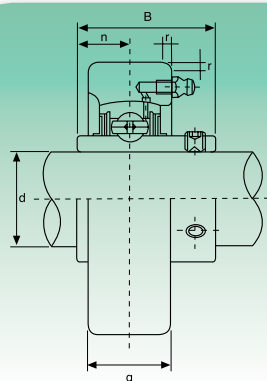

Typ Тип	Abmessungen - Размеры						Tragzahlen (N) Коэффициент нагрузки (H)		Lager Подшипник	Gehäuse Корпус	Gewicht Вес
	d	a	g	r	B	n	dynamisch C Динамическая C	statisch C ₀ Статическая C ₀			
	mm/Zoll - мм/дюйм										kg
UCC201	12	72	20	2	31	12,7	12160	6318	UC201	C204	0,52
UCC201-8	3/7	2,8346	25/32	0,079	1,2205	0,500					0,51
UCC202	15	72	20	2	31	12,7	12160	6318	UC202	C204	0,51
UCC202-9	9/16	2,8346	25/32	0,079	1,2205	0,500					0,51
UCC202-10	5/8	2,8346	25/32	0,079	1,2205	0,500			UC202-10		0,51
UCC203	17	72	20	2	31	12,7	12160	6318	UC203	C204	0,50
UCC203-11	11/16	2,8346	25/32	0,079	1,2205	0,500					0,49
UCC204	20	72	20	2	31	12,7	12160	6318	UC204	C204	0,48
UCC204-12	3/4	2,8346	25/32	0,079	1,2205	0,500					0,48
UCC205	25	80	22	2	34,1	14,3	13300	7457	UC205	C205	0,63
UCC205-13	13/16										0,67
UCC205-14	7/8	3,1496	55/64	0,079	1,3425	0,563					0,66
UCC205-15	15/16										0,64
UCC205-16	1										0,63
UCC206	30	85	27	2	38,1	15,9	18525	10735	UC206	C206	0,80
UCC206-17	11/16										0,83
UCC206-18	11/8	3,3465	11/16	0,079	1,5000	0,626					0,82
UCC206-19	13/16										0,80
UCC206-20	1 1/4										0,79
UCC207	35	90	28	2	42,9	17,5	24415	14630	UC207	C207	0,93
UCC207-20	1 1/4										0,99
UCC207-21	15/16	3,5433	17/64	0,079	1,6890	0,689					0,96
UCC207-22	13/8										0,93
UCC207-23	17/16										0,90
UCC208	40	100	30	2,5	49,2	19	27645	16910	UC208	C208	1,22
UCC208-24	1 1/2	3,9370	13/16	0,098	1,9370	0,748					1,26
UCC208-25	19/16										1,23
UCC209	45	110	31	2,5	49,2	19	32395	20235	UC209	C209	1,49
UCC209-26	15/8										1,59
UCC209-27	111/16	4,3307	17/32	0,098	1,9370	0,748					1,55
UCC209-28	1 3/4										1,51
UCC210	50	120	33	2,5	51,6	19	33345	22135	UC210	C210	1,90
UCC210-29	113/16										2,02
UCC210-30	17/8	4,7244	119/64	0,098	2,0315	0,748					1,97
UCC210-31	115/16										1,92
UCC210-32	2										1,88
UCC211	55	125	35	2,5	55,6	22,2	41230	27930	UC211	C211	2,18
UCC211-32	2										2,33
UCC211-33	21/16	4,9213	13/8	0,098	2,1890	0,874					2,27
UCC211-34	21/8										2,22
UCC211-35	23/16										2,16
UCC212	60	130	38	2,5	65,1	25,4	49780	34390	UC212	C212	2,52
UCC212-36	2 1/4										2,65
UCC212-37	25/16	5,1181	1 1/2	0,098	2,5630	1,000					2,57
UCC212-38	23/8										2,50
UCC212-39	27/16										2,43
UCC213	65	140	40	3	65,1	25,4	54340	38095	UC213	C213	2,98
UCC213-40	2 1/2	5,5118	137/64	0,118	2,5630	1,000					3,07
UCC213-41	29/16										2,98

Lieferbar aus rostfreiem Stahl Gehäuse: AISI 304 - Lager: AISI 440C - Поставляется в исполнении из нержавеющей стали Корпус: AISI 304 - Подшипник: AISI 440C
Auf Anfrage mit Lager SA (SACC) lieferbar - На заказ поставляется с подшипником серии SA (SACC)