

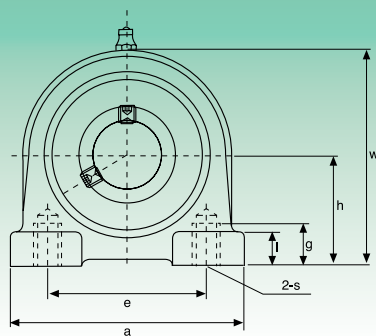


UCPA2 Normale Reihe - Нормальная серия

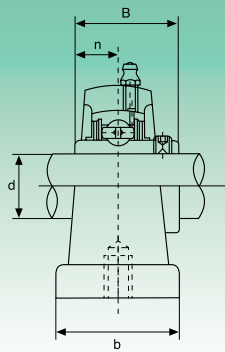

Typ Typ	Abmessungen - Размеры										Bef.Bolz. Креп. винт	Tragzahlen (N) Коэффициент нагрузки (H)		Lager Подшипник	Gehäuse Корпус	Gewicht Вес
	d	h	a	e	b	g	l	w	B	n		dynamisch C Динамическая C	statisch C ₀ Статическая C ₀			
	mm/Zoll - мм/дюйм											mm/Zoll - мм/дюйм				
UCPA201 UCPA201-8	12 ¾	30,2 13/16	76 3	52 23/64	40 19/16	15 19/32	11 7/16	62 27/16	31 1,2205	12,7 0,500	M10 3/8	12160	6318	UC201 UC201-8	PA204	0,60 0,59
UCPA202 UCPA202-9 UCPA202-10	15 9/16 5/8	30,2 13/16	76 3	52 23/64	40 19/16	15 19/32	11 7/16	62 27/16	31 1,2205	12,7 0,500	M10 3/8	12160	6318	UC202 UC202-9 UC202-10	PA204	0,59 0,59 0,59
UCPA203 UCPA203-11	17 11/16	30,2 13/16	76 3	52 23/64	40 19/16	15 19/32	11 7/16	62 27/16	31 1,2205	12,7 0,500	M10 3/8	12160	6318	UC203 UC203-11	PA204	0,58 0,57
UCPA204 UCPA204-12	20 ¾	30,2 13/16	76 3	52 23/64	40 19/16	15 19/32	11 7/16	62 27/16	31 1,2205	12,7 0,500	M10 3/8	12160	6318	UC204 UC204-12	PA204	0,56 0,56
UCPA205 UCPA205-13 UCPA205-14 UCPA205-15 UCPA205-16	25 13/16 7/8 15/16 1	36,5 17/16	84 35/16	56 213/64	38 1½	15 19/32	12 15/32	72 253/64	34,1 1,3425	14,3 0,563	M10 3/8	13300	7457	UC205 UC205-13 UC205-14 UC205-15 UC205-16	PA205	0,83 0,87 0,86 0,84 0,83
UCPA206 UCPA206-17 UCPA206-18 UCPA206-19 UCPA206-20	30 11/16 11/8 13/16 1¼	42,9 111/16	94 345/64	66 219/32	50 131/32	18 45/64	12 15/32	84 35/16	38,1 1,5000	15,9 0,626	M14 ½	18525	10735	UC206 UC206-17 UC206-18 UC206-19 UC206-20	PA206	1,12 1,15 1,14 1,12 1,11
UCPA207 UCPA207-20 UCPA207-21 UCPA207-22 UCPA207-23	35 1¼ 15/16 13/8 17/16	47,6 17/8	110 421/64	80 35/32	55 211/64	20 25/32	13 33/64	95 347/64	42,9 1,6890	17,5 0,689	M14 ½	24415	14630	UC207 UC207-20 UC207-21 UC207-22 UC207-23	PA207	1,48 1,54 1,51 1,48 1,45
UCPA208 UCPA208-24 UCPA208-25	40 1½ 19/16	49,2 115/16	116 49/16	84 35/16	58 29/32	20 25/32	13 33/64	100 315/16	49,2 1,9370	19 0,748	M14 ½	27645	16910	UC208 UC208-24 UC208-25	PA208	1,89 1,93 1,90
UCPA209 UCPA209-26 UCPA209-27 UCPA209-28	45 15/8 111/16 1¾	54,2 29/64	120 423/32	90 335/64	60 223/64	25 63/64	13 33/64	108 4¼	49,2 1,9370	19 0,748	M14 ½	32395	20235	UC209 UC209-26 UC209-27 UC209-28	PA209	1,98 2,08 2,04 2,00
UCPA210 UCPA210-29 UCPA210-30 UCPA210-31 UCPA210-32	50 113/16 17/8 115/16 2	57,2 2¼	130 51/8	94 345/64	64 233/64	25 63/64	14 35/64	116 49/16	51,6 2,0315	19 0,748	M16 5/8	33345	22135	UC210 UC210-29 UC210-30 UC210-31 UC210-32	PA210	2,16 2,28 2,23 2,18 2,14
UCPA211 UCPA211-32 UCPA211-33 UCPA211-34 UCPA211-35	55 2 21/16 21/8 23/16	63,5 2½	140 533/64	104 43/32	66 219/32	25 63/64	14 35/64	125 459/64	55,6 2,1890	22,2 0,874	M16 5/8	41230	27930	UC211 UC211-32 UC211-33 UC211-34 UC211-35	PA211	3,26 3,41 3,35 3,30 3,24
UCPA212 UCPA212-36 UCPA212-37 UCPA212-38 UCPA212-39	60 2¼ 25/16 23/8 27/16	69,9 2¾	150 529/32	114 431/64	68 243/64	25 63/64	15 19/32	138 57/16	65,1 2,5630	25,4 1,000	M16 5/8	49780	34390	UC212 UC212-36 UC212-37 UC212-38 UC212-39	PA212	4,19 4,32 4,24 4,17 4,10
UCPA213 UCPA213-40 UCPA213-41	65 2½ 29/16	76,2 3	160 619/64	124 47/8	70 2¾	25 63/64	15 19/32	150 529/32	65,1 2,5630	25,4 1,000	M16 5/8	54340	38095	UC213 UC213-40 UC213-41	PA213	- - -

Lieferbar aus rostfreiem Stahl Gehäuse: AISI 304 - Lager: AISI 440C - Поставляется в исполнении из нержавеющей стали Корпус: AISI 304 - Подшипник: AISI 440C
Auf Anfrage mit Lager SA (SAPA) lieferbar - На заказ поставляется с подшипником серии SA (SAPA)