» SPECIFICATION & MODEL

	G1/2 " (DN15)	Diameter of inlet/outlet pipe
	0.1~45°C	Ambient temperature
	0.05~0.6MPa	water pressure
With 30cm X30cm standard white sheet, it can self-adjust detection zone according to different enviroment.	40-70cm	Detecion zone
4AAA alkaline batteries can be used fo 2years at 150 cycles every day	≤0.5mw	Power consumption in static
4AAA alkaline batteries	DC6V	Power voltage
Remark		Specification

VUNIT NAME

water control valve


battert box

control board

cover

infrared sensor display

solenoid valve

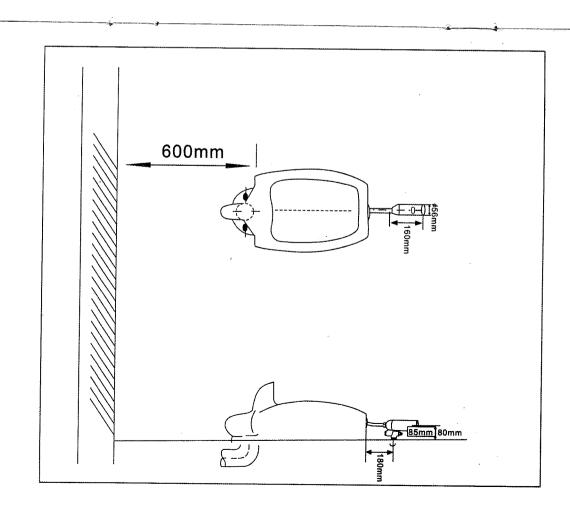

NSTALLATION SHOW

2

strainer cover

Outlet trip

G1/2"screw

ł

Sealed ring

decorative cover

3