


Modular Contactors, low noise

1-, 2-pole, 1 Modules (17,5mm)
low noise, AC operated



1-, 2-pole, 1 Modul (17,5mm)
hum free, AC/DC operated



2-pole, 1 Modul (17,5mm)
low noise, AC operated





2-pole, 1 Modul (17,5mm)
hum free, AC/DC operated



2-pole, 2 Modules (35mm)
low noise, AC operated



4-pole, 2 Modules (35mm) ¹⁾
low noise, AC operated




Rated current 400V AC1 A	Power Rating		Motor AC3 400V 3~ kW	Type	Pack Pcs.	Weight kg/Pcs.
	AC1 230V 1~ kW	400V 3~ kW				
20	4,6	-	-	NO NC coil V ~ R20-10 230	12	0,12
				R20-20 230 R20-20 24	12	0,12
20	4,6	-	-	R20-11 230 R20-11 24	12	0,12
				R20-02 230 R20-02 24	12	0,12
20	4,6	-	-	R20-10 230VM	12	0,12
				R20-20 230VM R20-20 24VM	12	0,12
20	4,6	-	-	R20-11 230VM R20-11 24VM	12	0,12
				R20-02 230VM R20-02 24VM	12	0,12
25	5,5	-	-	R25-20 230 R25-20 24	12	0,14
				R25-11 230 R25-11 24	12	0,14
25	5,5	-	-	R25-02 230 R25-02 24	12	0,14
				R25-20 230VM R25-20 24VM	12	0,14
25	5,5	-	-	R25-11 230VM R25-11 24VM	12	0,14
				R25-02 230VM R25-02 24VM	12	0,14
40 63	9 14,3	-	-	R40-20 230 R63-20 230	6	0,23
				R25-40 230 R25-40 24	6	0,21
25	5,7	17	4	R25-31 230 R25-31 24	6	0,21
				R25-13 230 R25-13 24	6	0,21
25	5,7	17	4	R25-22 230 R25-22 24	6	0,21
				R25-04 230 R25-04 24	6	0,21

1) Sealable with the Sealing Cover P712, available aux. contact block RH11


2) Sealable with the Sealing Cover P712, available aux. contact block RH11-1

4-pole, 2 Modules (35mm) ²⁾
hum free, AC/DC operated

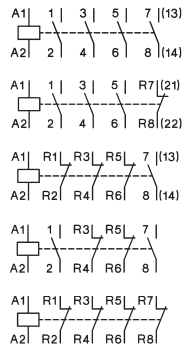


Rated current 400V AC1 A	Power Rating		Motor AC3 400V 3~ kW	Type	Pack Pcs.	Weight kg/Pcs.
	AC1 230V 1~ kW	400V 3~ kW				
25	5,7	17	4	R25-40 230VM	6	0,21
25	5,7	17	4	R25-40 24VM	6	0,21
25	5,7	17	4	R25-31 230VM	6	0,21
25	5,7	17	4	R25-31 24VM	6	0,21
25	5,7	17	4	R25-13 230VM	6	0,21
25	5,7	17	4	R25-13 24VM	6	0,21
25	5,7	-	-	R25-22 230VM	6	0,21
25	5,7	-	-	R25-22 24VM	6	0,21
25	5,7	17	4	R25-04 230VM	6	0,21
25	5,7	17	4	R25-04 24VM	6	0,21

4-pole, 3 Modules (52,5mm) ¹⁾
low noise, AC operated

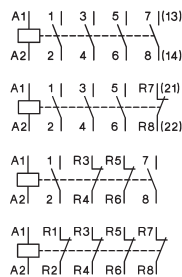

40	9	27,5	12,5	R40-40 230	4	0,35
40	9	27,5	12,5	R40-40 24	4	0,35
40	9	27,5	12,5	R40-31 230	4	0,35
40	9	27,5	12,5	R40-31 24	4	0,35
40	9	-	-	R40-22 230	4	0,35
40	9	-	-	R40-22 24	4	0,35
40	9	27,5	12,5	R40-04 230	4	0,35
40	9	27,5	12,5	R40-04 24	4	0,35

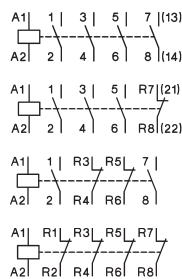

63	14,3	43	15	R63-40 230	4	0,36
63	14,3	43	15	R63-40 24	4	0,36
63	14,3	43	15	R63-31 230	4	0,36
63	14,3	43	15	R63-31 24	4	0,36
63	14,3	-	-	R63-22 230	4	0,36
63	14,3	-	-	R63-22 24	4	0,36
63	14,3	43	15	R63-04 230	4	0,36
63	14,3	43	15	R63-04 24	4	0,36

Accessories for Modular Contactors

Auxiliary Contact Block, ½ Module (8,75mm)



for R25 to R63 4-pole

for VM-Geräte



Rated current AC15 230V 400V A A		Thermal current Ith A	Type	Pack Pcs.	Weight kg/pcs.
3	2	10	RH11	3	0,03
3	2	10	RH11-1	3	0,03

Sealing covers




for R25.. (4-pole, 2 Modules)	P721	10	0,002
for R40.. und R63.. (4-pole, 3 Modules)	P690	10	0,002

suppressor unit, 1 Module (17,5mm)



for 2x R20.. and R63.. RC-Unit for 12V - 250V~	RC-R 230	2	0,05
---	----------	---	------

Spacing piece, ½ Module (8,75mm)

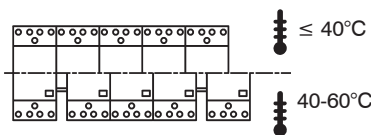

für R20.. und R63..	P730	10	0,01
---------------------	------	----	------

for ambient temperature >40°C
we recommend to use spacing peaces

1) Sealable with the Sealing Cover P721, available aux. contact block RH11