




Оправки для насадных фрез с внутренним подводом СОЖ DIN 6357



Обозначение	ISO	d (h6) мм	A мм	l1 мм	D мм
• 240.040.MHI16	BT 40	16	40	17	38
• 240.040.MHI22	BT 40	22	40	19	48
• 240.040.MHI27	BT 40	27	40	21	58
• 240.050.MHI32	BT 40	32	50	24	78
• 240.050.MHI40	BT 40	40	50	27	88
• 240.100.MHI16	BT 40	16	100	17	38
• 240.100.MHI22	BT 40	22	100	19	48
• 240.100.MHI27	BT 40	27	100	21	58
• 240.100.MHI32	BT 40	32	100	24	78
• 240.100.MHI40	BT 40	40	100	27	88
• 240.160.MHI16	BT 40	16	160	17	38
• 240.160.MHI22	BT 40	22	160	19	48
• 240.160.MHI27	BT 40	27	160	21	58
• 240.160.MHI32	BT 40	32	160	24	78
• 240.160.MHI40	BT 40	40	160	27	88
• 250.040.MHI22	BT 50	22	40	19	48
• 250.040.MHI27	BT 50	27	40	21	58
• 250.050.MHI32	BT 50	32	50	24	78
• 250.050.MHI40	BT 50	40	50	27	88
• 250.080.MHI60	BT 50	60	80	40	129

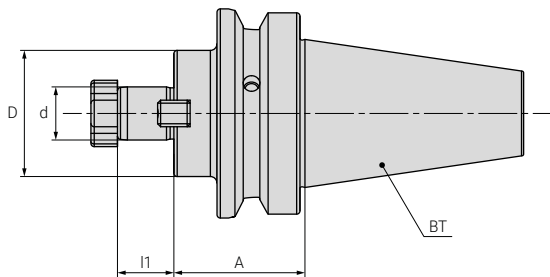

Обозначение	ISO	d (h6) мм	A мм	l1 мм	D мм
• 250.100.MHI22	BT 50	22	100	19	48
• 250.100.MHI27	BT 50	27	100	21	58
• 250.100.MHI32	BT 50	32	100	24	78
• 250.100.MHI40	BT 50	40	100	27	88
• 250.160.MHI22	BT 50	22	160	19	48
• 250.160.MHI27	BT 50	27	160	21	58
• 250.160.MHI32	BT 50	32	160	24	78
• 250.160.MHI40	BT 50	40	160	27	88

Комплектующие

Ключ WS.. стр. 700	Крепёжный винт стр. 706	Штревель стр. 693	Шестигранный винт стр. 707	Фиксирующий сухарь —