




Оправки для фрезерных головок

Обозначение	ISO	M	d1 мм	D мм	A мм	l1 мм
• 140.044.SH16	SK 40	16	29	29	44	25
• 140.069.SH16	SK 40	16	29	34	69	50
• 140.094.SH16	SK 40	16	29	34	94	75
• 140.119.SH16	SK 40	16	29	36	119	100
• 140.169.SH16	SK 40	16	29	43	169	150
• 150.069.SH08	SK 50	8	13	23	69	50
• 150.119.SH08	SK 50	8	13	25	119	100
• 150.169.SH08	SK 50	8	13	30	169	150
• 150.069.SH10	SK 50	10	18	23	69	50
• 150.119.SH10	SK 50	10	18	32	119	100
• 150.169.SH10	SK 50	10	18	37	169	150
• 150.069.SH12	SK 50	12	21	24	69	50
• 150.119.SH12	SK 50	12	21	33	119	100
• 150.169.SH12	SK 50	12	21	40	169	150
• 150.069.SH16	SK 50	16	29	34	69	50
• 150.119.SH16	SK 50	16	29	36	119	100
• 150.169.SH16	SK 50	16	29	43	169	150



Цанговые оправки ER JIS B 6339 (MAS 403 BT)

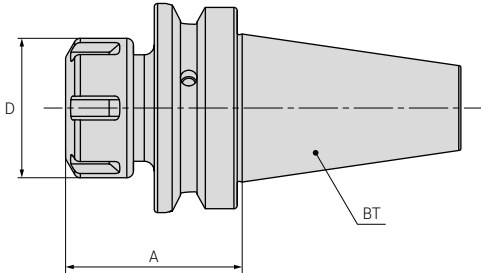

Обозначение	ISO	ER	S мм	A мм	D мм	Форма
• 230.070.CC10	BT 30	ER 16	1–10	70	32	AD
• 230.070.CC13	BT 30	ER 20	2–13	70	35	AD
• 230.070.CC16	BT 30	ER 25	2–16	70	42	AD
• 230.070.CC20	BT 30	ER 32	2–20	70	50	AD
• 230.070.CC26	BT 30	ER 40	3–26	70	63	AD
• 230.100.CC10	BT 30	ER 16	1–10	100	32	AD
• 230.100.CC13	BT 30	ER 20	2–13	100	35	AD
• 230.100.CC16	BT 30	ER 25	2–16	100	42	AD
• 230.100.CC20	BT 30	ER 32	2–20	100	50	AD
• 240.063.CC10	BT 40	ER 16	1–10	63	32	AD/B
• 240.070.CC13	BT 40	ER 20	2–13	70	35	AD/B
• 240.060.CC16	BT 40	ER 25	2–16	60	42	AD/B
• 240.070.CC20	BT 40	ER 32	2–20	70	50	AD/B
• 240.080.CC26	BT 40	ER 40	3–26	80	63	AD/B
• 240.100.CC10	BT 40	ER 16	1–10	100	32	AD/B
• 240.100.CC13	BT 40	ER 20	2–13	100	35	AD/B
• 240.100.CC16	BT 40	ER 25	2–16	100	42	AD/B
• 240.100.CC20	BT 40	ER 32	2–20	100	50	AD/B
• 240.100.CC26	BT 40	ER 40	3–26	100	63	AD/B

S – диапазон зажимаемых размеров



Цанговые оправки ER JIS B 6339 (MAS 403 BT)

Обозначение	ISO	ER	S мм	A мм	D мм	Форма
• 240.160.CC10	BT 40	ER 16	1–10	160	32	AD/B
• 240.160.CC13	BT 40	ER 20	2–13	160	35	AD/B
• 240.160.CC16	BT 40	ER 25	2–16	160	42	AD/B
• 240.160.CC20	BT 40	ER 32	2–20	160	50	AD/B
• 240.160.CC26	BT 40	ER 40	3–26	160	63	AD/B
• 240.200.CC10	BT 40	ER 16	1–10	200	32	AD/B
• 240.200.CC13	BT 40	ER 20	2–13	200	35	AD/B
• 240.200.CC16	BT 40	ER 25	2–16	200	42	AD/B
• 240.200.CC20	BT 40	ER 32	2–20	200	50	AD/B
• 240.200.CC26	BT 40	ER 40	3–26	200	63	AD/B
• 250.070.CC13	BT 50	ER 20	2–13	70	35	AD/B
• 250.070.CC16	BT 50	ER 25	2–16	70	42	AD/B
• 250.070.CC20	BT 50	ER 32	2–20	70	50	AD/B
• 250.080.CC26	BT 50	ER 40	3–26	80	63	AD/B
• 250.100.CC10	BT 50	ER 16	1–10	100	32	AD/B
• 250.100.CC13	BT 50	ER 20	2–13	100	35	AD/B
• 250.100.CC16	BT 50	ER 25	2–16	100	42	AD/B
• 250.100.CC20	BT 50	ER 32	2–20	100	50	AD/B
• 250.100.CC26	BT 50	ER 40	3–26	100	63	AD/B
• 250.160.CC10	BT 50	ER 16	1–10	160	32	AD/B
• 250.160.CC13	BT 50	ER 20	2–13	160	35	AD/B
• 250.160.CC16	BT 50	ER 25	2–16	160	42	AD/B
• 250.160.CC20	BT 50	ER 32	2–20	160	50	AD/B
• 250.160.CC26	BT 50	ER 40	3–26	160	63	AD/B
• 250.200.CC10	BT 50	ER 16	1–10	200	32	AD/B
• 250.200.CC13	BT 50	ER 20	2–13	200	35	AD/B
• 250.200.CC16	BT 50	ER 25	2–16	200	42	AD/B
• 250.200.CC20	BT 50	ER 32	2–20	200	50	AD/B
• 250.200.CC26	BT 50	ER 40	3–26	200	63	AD/B



S – диапазон зажимаемых размеров

Комплектующие

Цанги ER..	Гайка CN.ER..	Ключ WN..	Штрель
стр. 664	стр. 701	стр. 696	стр. 693



Цанговые оправки ER mini JIS B 6339 (MAS 403 BT)

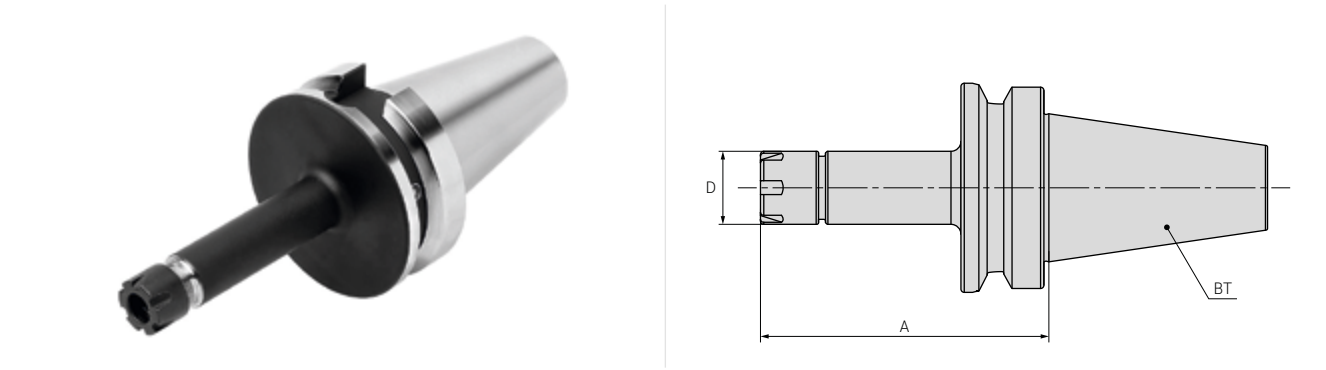

Обозначение	ISO	ER	S мм	A мм	D мм
• 240.055.CCM07	BT 40	ER 11	1–7	55	16
• 240.100.CCM07	BT 40	ER 11	1–7	100	16
• 240.160.CCM07	BT 40	ER 11	1–7	160	16
• 240.055.CCM10	BT 40	ER 16	1–10	55	22
• 240.100.CCM10	BT 40	ER 16	1–10	100	22
• 240.160.CCM10	BT 40	ER 16	1–10	160	22

S – диапазон зажимаемых размеров

Комплектующие

Цанги ER..	Гайка CN.ERM..	Ключ WN..	Штрель
стр. 664	стр. 702	стр. 696	стр. 693