


	Product Information XST32-160/15	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	Maksim Sokolov
		Contact	+79059301333

Part NO.	50003843		
Product Picture		Note	
		Water supply: Water filtration and transportation, the main pipeline pressurization; Pressurization for high-rise buildings, hotels, etc. Industry: Flushing and cleaning system, boiler feed water, cooling water circulation, water treatment system, equipment supporting system. water treatment: Ultrafiltration system, reverse osmosis system, distillation system, separator,swimming pool. Other: Air conditioning system; heating system; agricultural irrigation,fire fighting system	
Nameplate parameters			
flow	16 m³/h		
head	18 m		
Efficiency	58 %		
speed	2900 rpm		
number of stages	1		
Technical			
Flow range (m³/h)	1.6-21m3/h		
Curve tolerance	ISO 9906 Annex A		
Maximum lift (m)	24m		
Maximum Altitude	1000m		
			
Material			
Impeller	HT200/06Cr19Ni10		
Pump inlet	HT200		
Pump shaft			
Fan cover	08F		
O-ring	NBR		
Rear end cover	ZL102		
Connector	HT200		
Fan	PP		
Cover box	ABS		
Supporting foot	HT200		
Guard plate			
Working conditions			
Medium temperature (°C)	-10°C+85°C		
Max. ambient temperature (°C)	+40°C		
Pumped medium	Liquid without solid particles and long fiberslow viscositynon-combustiblenon-corrosion liquid or other		
Critical cavitation margin(m)	2m		
Working pressure	12bar		
Installation			
Structure Type	Non-standard motor (Coaxial)		
Connection method	Flange connection / thread-connection		
Inlet diameter (mm)	DN50		
Outlet diameter (mm)	DN32		
Motor			
Motor phase	Three phase		

	Product Information XST32-160/15	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	Maksim Sokolov
		Contact	+79059301333


Protection class	IP54
Motor poles	2
Insulation class	F
Motor power (KW)	1.5kW
Motor model	XST32-160/15
Frequency	50Hz
Rated voltage (V)	380V
Rated current (A)	3.36A
Efficiency class	
Power factor	
Seal	
Mechanical seal	155-20
Weight/Packaging	
Net weight (kg)	40kg
Gross weight (kg)	45kg
Package size	480x270x385mm
	

	Performance Curve XST32-160/15	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
Item NO		Client Addr.	Novosibirsk
		Contacts	Maksim Sokolov
		Contact	+79059301333

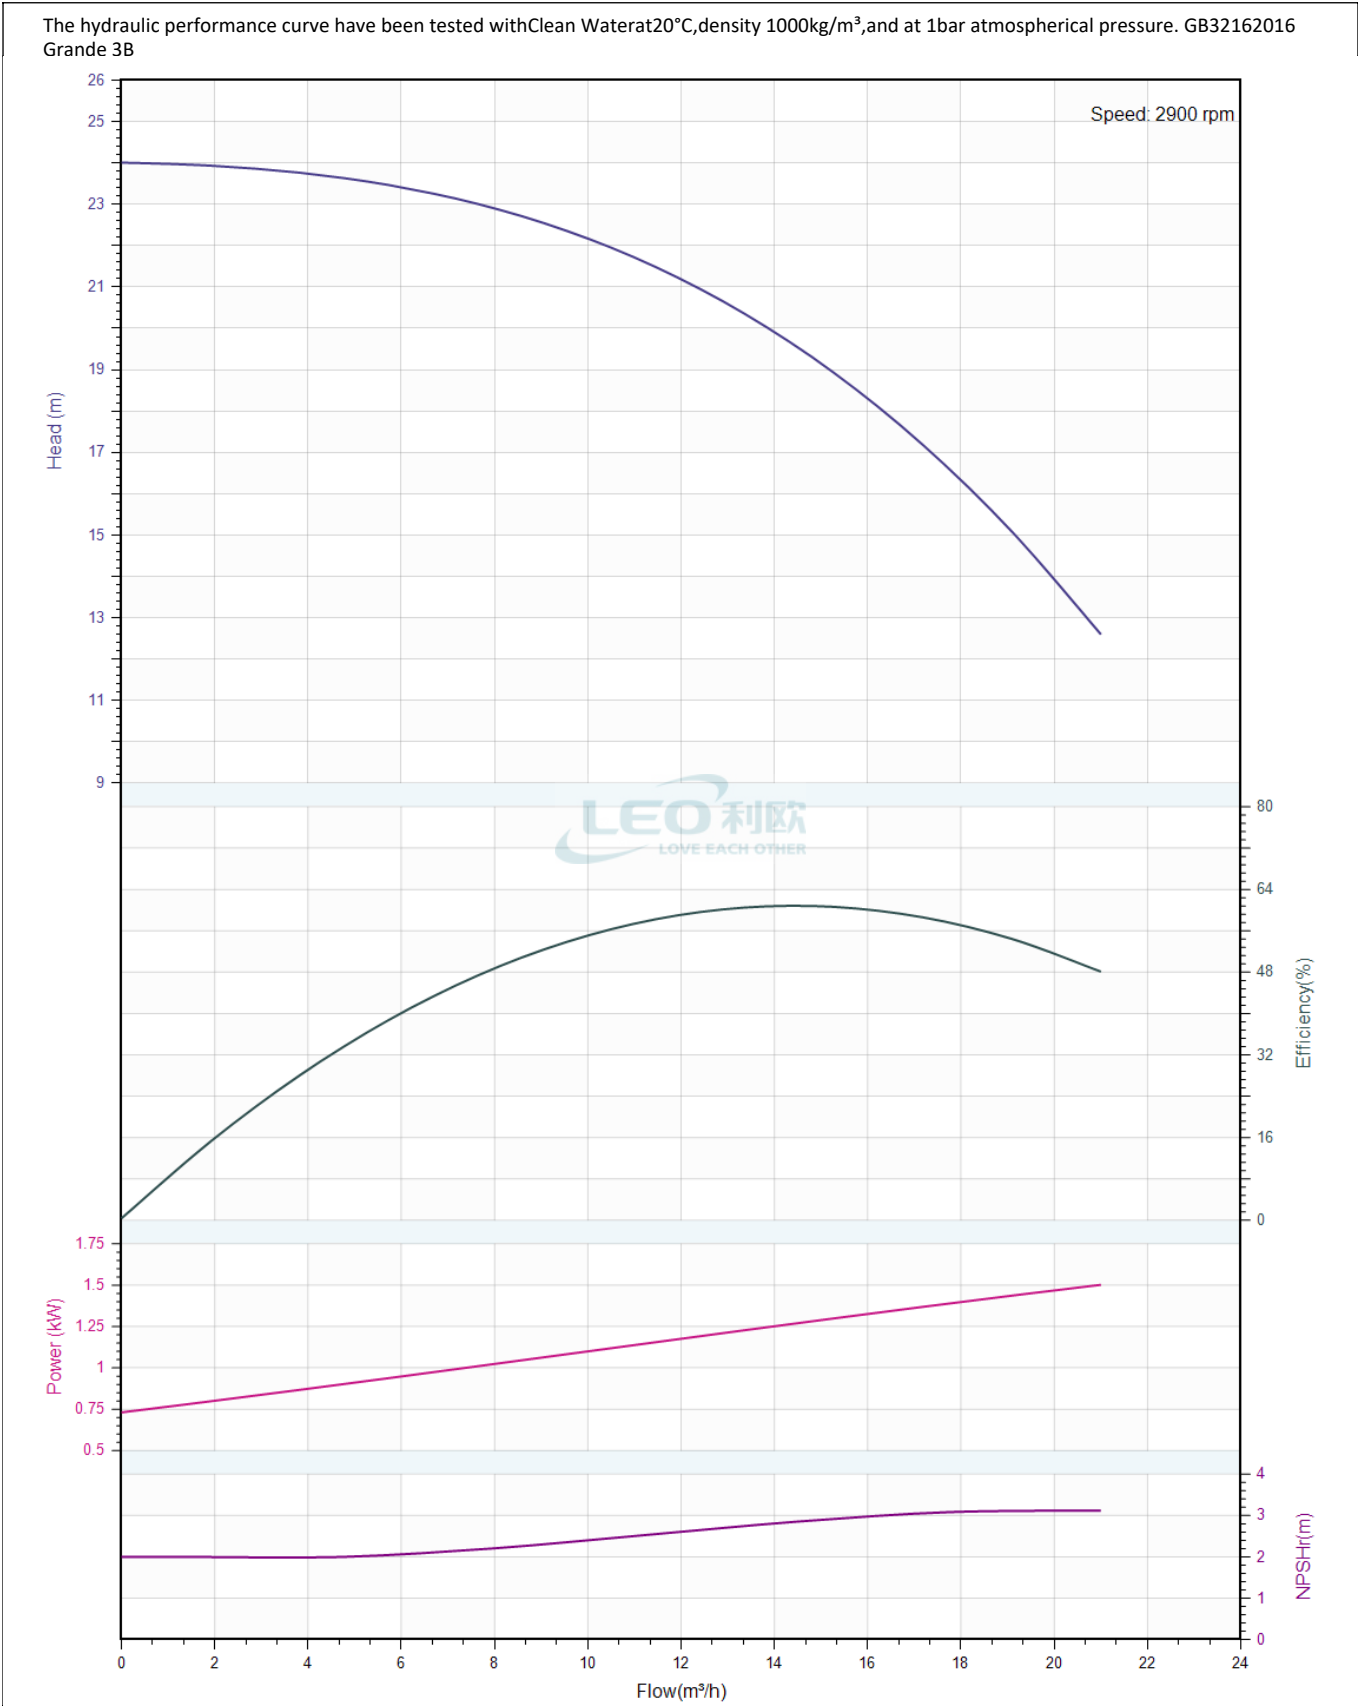

	Pump Technical Parameters XST32-160/15	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
Item NO		Client Addr.	Novosibirsk
		Contacts	Maksim Sokolov
		Contact	+79059301333

Rated parameters	
Pump model	XST32-160/15
Part NO.	50003843
Rated flow	16 m³/h
Rated head	18 m
Rated efficiency (%)	58
Power (kW)	1.35
NPSHr (m)	2
Speed (rpm)	2900
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

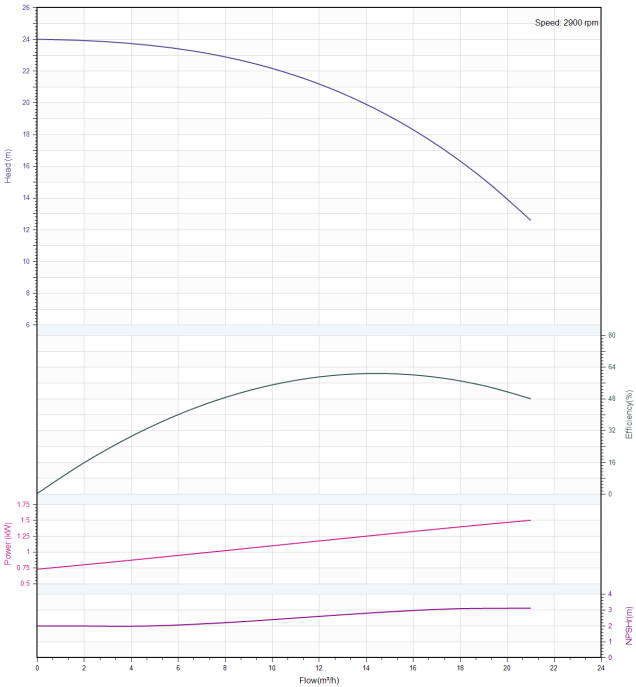

	Order Data XST32-160/15	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	Maksim Sokolov
		Contact	+79059301333

Pump model XST32-160/15
Part NO. 50003843
Product price
Quantity 1
Total price

Inquiry notes

