


	Product Information XST65-125/40	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	Maksim Sokolov
		Contact	+79059301333

Part NO.	50003842
Product Picture	Note
	Water supply: Water filtration and transportation, the main pipeline pressurization; Pressurization for high-rise buildings, hotels, etc. Industry: Flushing and cleaning system, boiler feed water, cooling water circulation, water treatment system, equipment supporting system. water treatment: Ultrafiltration system, reverse osmosis system, distillation system, separator,swimming pool. Other: Air conditioning system; heating system; agricultural irrigation,fire fighting system
Nameplate parameters	
flow	62 m³/h
head	16 m
Efficiency	74 %
speed	2900 rpm
number of stages	1
Technical	
Flow range (m³/h)	6.2-90m³/h
Curve tolerance	ISO 9906 Annex A
Maximum lift (m)	19m
Maximum Altitude	1000m
Material	
Impeller	HT200/06Cr19Ni10
Pump inlet	HT200
Pump shaft	
Fan cover	08F
O-ring	NBR
Rear end cover	ZL102
Connector	HT200
Fan	PP
Cover box	ABS
Supporting foot	HT200
Guard plate	
Working conditions	
Medium temperature (°C)	-10°C+85°C
Max. ambient temperature (°C)	+40°C
Pumped medium	Liquid without solid particles and long fiberslow viscositynon-combustiblenon-corrosion liquid or other
Critical cavitation margin(m)	4m
Working pressure	12bar
Installation	
Structure Type	Non-standard motor (Coaxial)
Connection method	Flange connection / thread-connection
Inlet diameter (mm)	DN80
Outlet diameter (mm)	DN65
Motor	
Motor phase	Three phase

	Product Information XST65-125/40	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	Maksim Sokolov
		Contact	+79059301333


Protection class	IP54
Motor poles	2
Insulation class	F
Motor power (KW)	4kW
Motor model	XST65-125/40
Frequency	50Hz
Rated voltage (V)	380V
Rated current (A)	8.41A
Efficiency class	
Power factor	
Seal	
Mechanical seal	TF PB20-22
Weight/Packaging	
Net weight (kg)	65kg
Gross weight (kg)	72kg
Package size	625x325x455mm
	

	Performance Curve XST65-125/40	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
Item NO		Client Addr.	Novosibirsk
		Contacts	Maksim Sokolov
		Contact	+79059301333

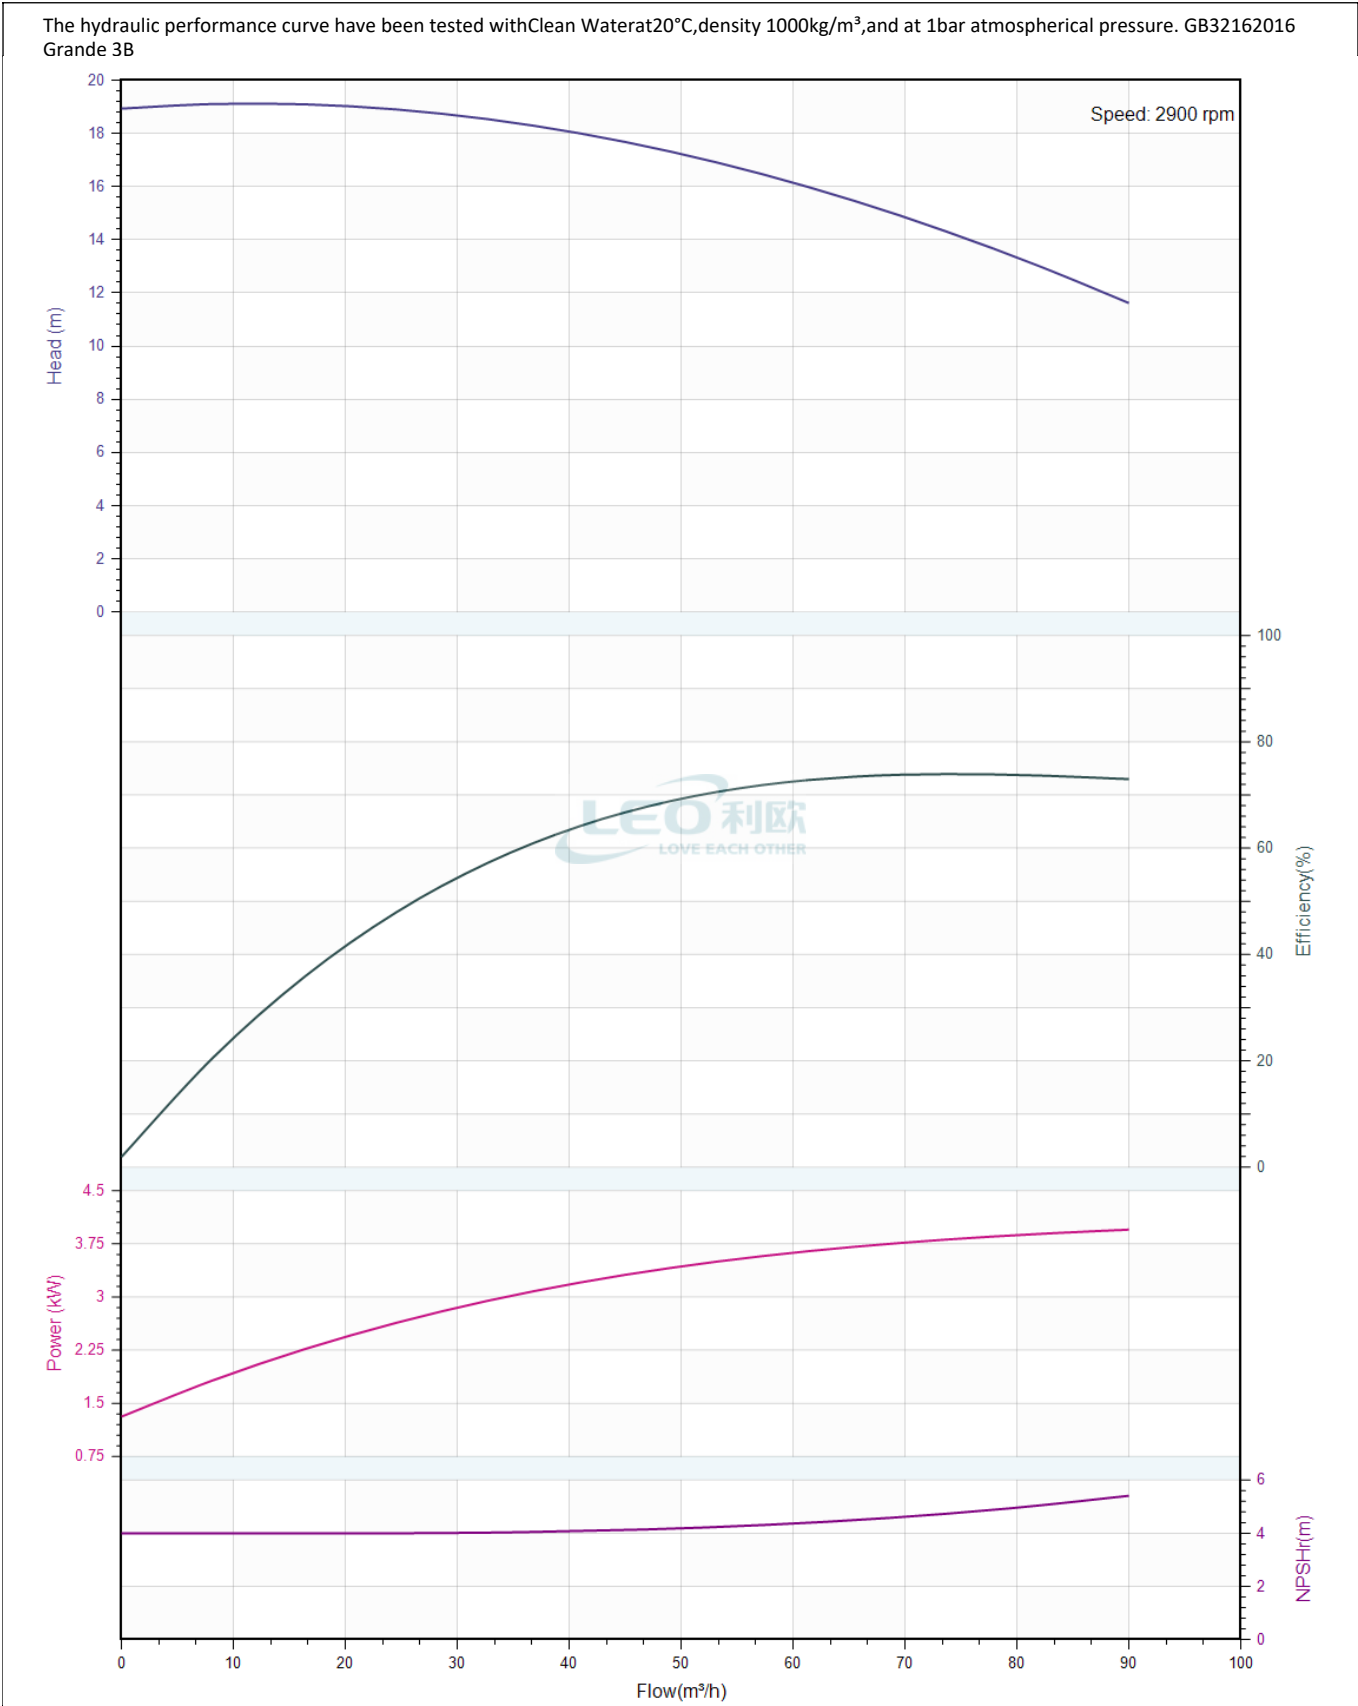

	Pump Technical Parameters XST65-125/40	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
Item NO		Client Addr.	Novosibirsk
		Contacts	Maksim Sokolov
		Contact	+79059301333

Rated parameters	
Pump model	XST65-125/40
Part NO.	50003842
Rated flow	62 m³/h
Rated head	16 m
Rated efficiency (%)	74
Power (kW)	3.65
NPSHr (m)	4
Speed (rpm)	2900
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

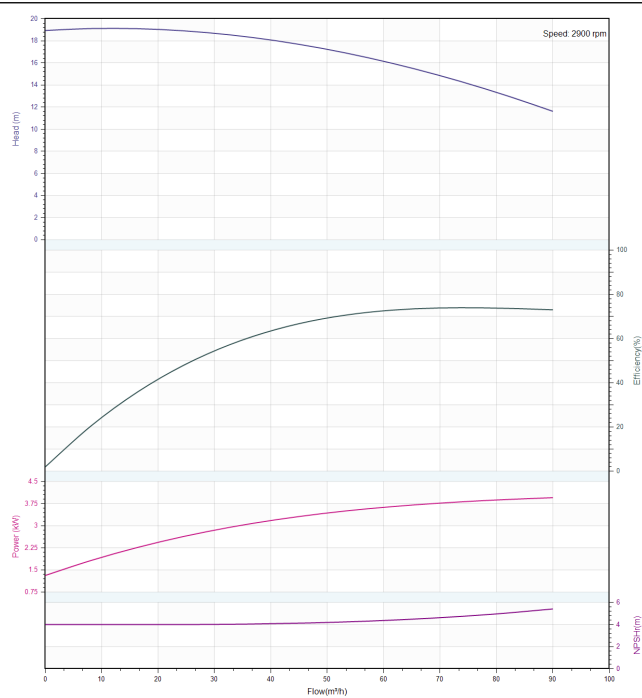

	Order Data XST65-125/40	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	Maksim Sokolov
		Contact	+79059301333

Pump model XST65-125/40
Part NO. 50003842
Product price
Quantity 1
Total price

Inquiry notes

