


Цилиндрический нож (пластинчатый)


MCBNR/L



Основной угол наклона 75°



Токарная обработка

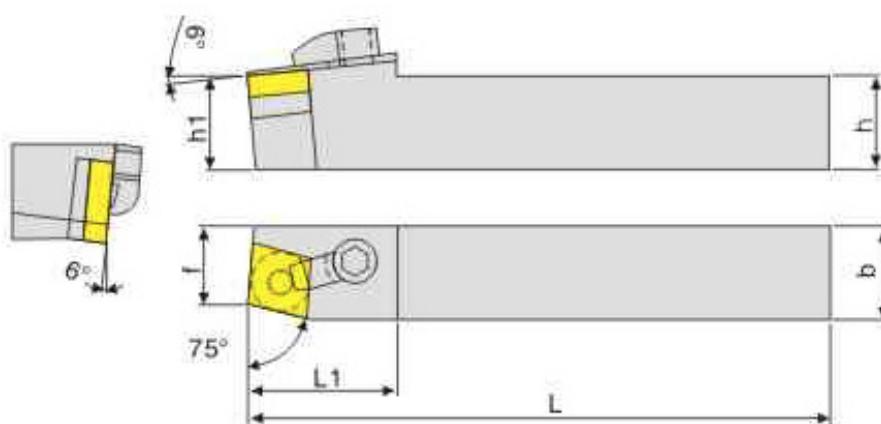

Модель	Лезвие	Применяемые условия						Детали				
												
	h	b	L	L1	h1	f	Под- кладка под резец	Болт	Пла- стина	Винт с двойной головкой	Гаеч- ный ключ	
MCBNR/L2020K12	CN□□ 1204□□	20	20	125	32	20	25	SC1204	CTM617	HL1814	ML0625	L2.5 L3.0
MCBNR/L2525M12		25	25	150	32	25	32					
MCBNR/L3232P12		32	32	170	32	32	40					
MCBNR/L2525M16	CN□□ 1606□□	25	25	150	32	25	32	SC1604	CTM822	HL2217	ML0830	L4.0 L5.0
MCBNR/L3232P16		32	32	170	32	32	40					