


Цилиндрический нож (пластинчатый)


MCMNN



Основной угол наклона 50°



Токарная обработка

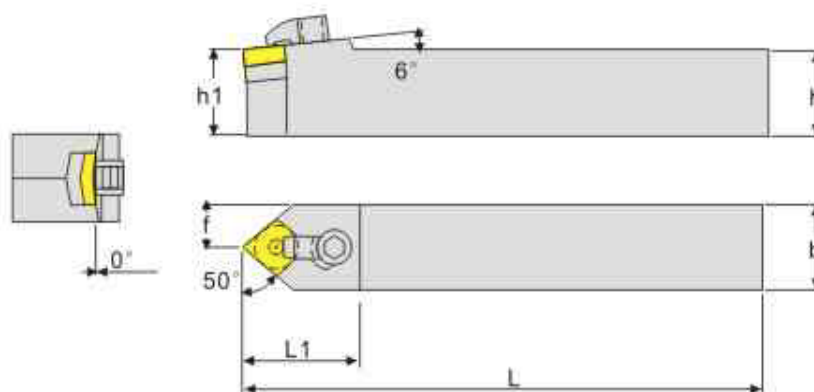

Модель	Лезвие	Применяемые условия						Детали				
												
	h	b	L	L1	h1	f	Под-кладка под резец	Болт	Пластина	Винт с двойной головкой	Гаечный ключ	
MCMNN1616K12	CN□□ 1204□□	16	16	100	16	16	20	SC1204	CTM617	HL1814	ML0625	L2.5 L3.0
MCMNN2020K12		20	20	125	32	20	25					
MCMNN2525M12		25	25	150	32	25	32					
MCMNN3232P12		32	32	170	32	32	40					
MCMNN4040R12		40	40	200	50	40	40					
MCMNN3232P16	CN□□ 1606□□	32	32	170	32	32	40	SC1604	CTM822	HL2217	ML0830	L4.0 L5.0
MCMNN4040R16		40	40	200	50	40	40					
MCMNN4040R19	CN□□ 1906□□	40	40	200	50	40	40	SC1904	CTM1022	HL2217	ML0830	L4.0 L5.0