


Цилиндрический нож (пластинчатый)


MSKNR/L



Основной угол наклона 75°



Токарная обработка

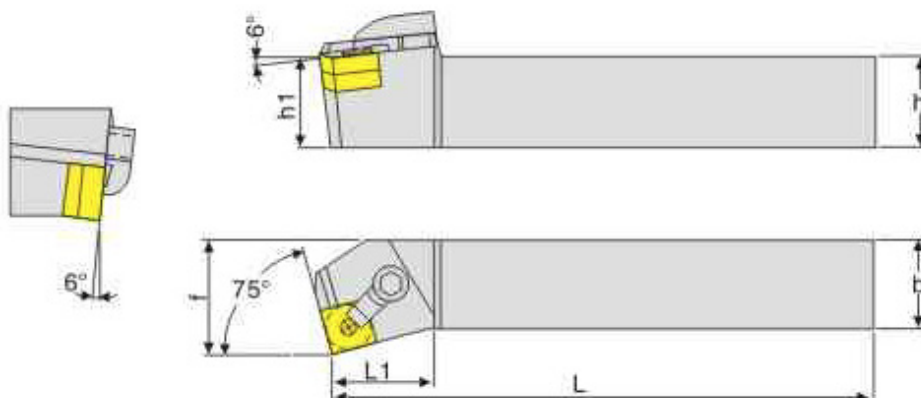

Модель	Лезвие	Применяемые условия						Детали				
												
	h	b	L	L1	h1	f	Под- кладка под резец	Болт	Пла- стина	Винт с двойной головкой	Гаеч- ный ключ	
MSKNR/L2020K12	SN□□ 1204□□	20	20	125	29	20	25	MS1204	СТМ617	HL1814	ML0625	L2.5 L3.0
MSKNR/L2525M12		25	25	150	29	25	32					
MSKNR/L3232P12		32	32	170	29	32	40					
MSKNR/L3232P15	SN□□ 1506□□	32	32	170	29	32	40	MS1504	СТМ0822	HL2114	ML0825	L3.0 L4.0