


Цилиндрический нож (пластинчатый)


MTJNR/L



Основной угол наклона 93°



Точение и профилирование

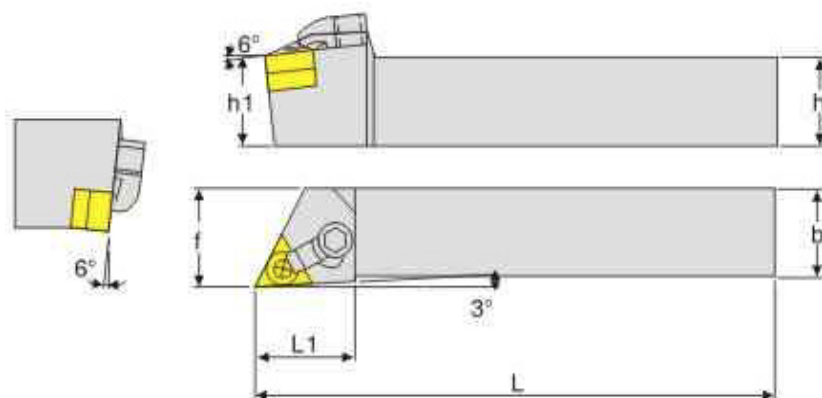

Модель	Лезвие	Применяемые условия						Детали				
												
	h	b	L	L1	h1	f	Под- кладка под резец	Болт	Пла- стина	Винт с двойной головкой	Гаеч- ный ключ	
MTJNR/L1616H16	TN□□ 1604□□	16	16	100	30	16	20	ST1603	CTM513	HL1814	ML0625	L2.0 L3.0
MTJNR/L2020K16		20	20	120	32	20	25					
MTJNR/L2525M16		25	25	150	32	25	32					
MTJNF/L3232P16		32	32	170	36	32	40					
MTJNR/L4040R16	TN□□ 2204□□	40	40	200	36	32	50	ST2204	CTM822	HL1917	ML0830	L2.5 L4.0
MTJNR/L2525M22		25	25	150	38	25	32					
MTJNA/L3232P22		32	32	170	38	32	40					
MTJNR/L4040R22		40	40	200	36	32	50					