


Инструмент для токарной обработки канавок (винтового типа)


SDQCR/L



Основной угол наклона 107.5°



Обработка торца, сквозного отверстия, глухого отверстия

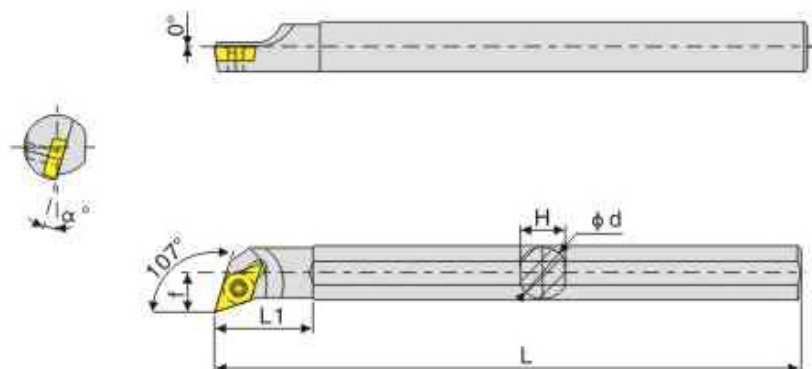

Модель	Лезвие	Применяемые условия							Детали	
										
		ϕ Dmin	ϕ D	f	L	L1	H	α°	Винт	Гаечный ключ
S10K-SDQCR/L07	DC□□ 0702□□	13	10	7	125	23	9	10	M2.5x6	T8
S12M-SDQCR/L07		16	12	9	150	30	11	8		
S16Q-SDQCR/L07		20	16	10.5	180	30	15	6		
S20R-SDQCR/L11	DC□□ 11T3□□	25	20	13	200	39	19	6	M4x8	T15
S25S-SDQCR/L11		32	25	16	250	40	24	4		
S32T-SDQCR/L11		39	32	20	300	43	30	4		
H10K-SDQCR/L07	DC□□ 0702□□	13	10	7	125	23	9	10	M2.5x6	T8
H12M-SDQCR/L07		16	12	9	150	30	11	8		
H16Q-SDQCR/L07		20	16	10.5	180	30	15	6		