


Цилиндрический нож (винтового типа)


STFCR/L



Основной угол наклона 91°



Токарная обработка

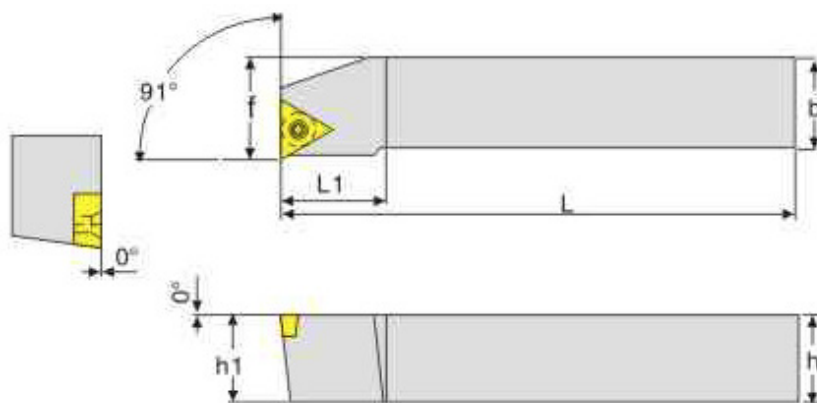

Модель	Лезвие	Применяемые условия						Детали	
									
		h	b	L	L1	h1	f	Винт	Гаечный ключ
STFCR/L1010E09	TC□□ T0902□□	10	10	70	12	10	10	M2.2x6	T6
STFCR/L1212F11	TC□□ T1102□□	12	12	80	16	12	16	M2.5x6	T8
STFCR/L1616H11		16	16	100	16	16	20		
STFCR/L1616H16	TC□□ T16T3□□	16	16	100	16	16	20	M4x10	T15
STFCR/L2020K16		20	20	125	22	20	25		
STFCR/L2525M16		25	25	150	22	25	32		