


Цилиндрический нож (пластинчатый)


MCLNR/L



Основной угол наклона 95°



Точение, торцевая обработка

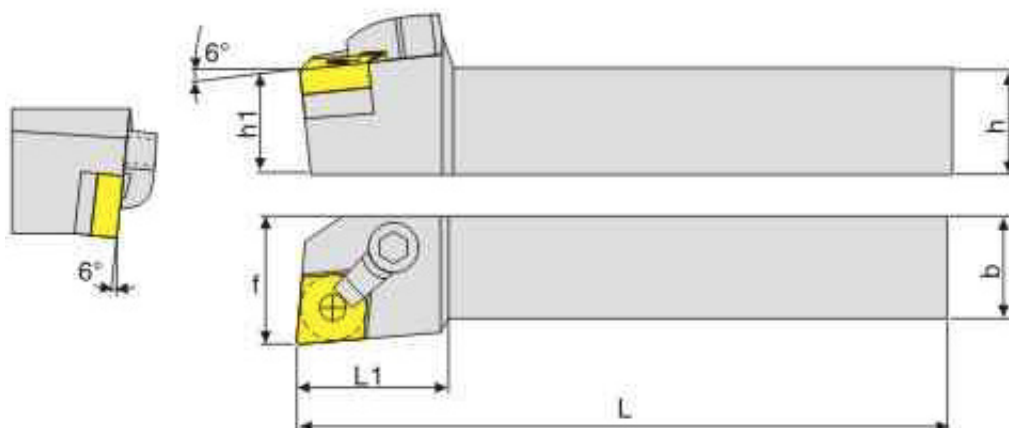

Модель	Лезвие	Применяемые условия						Детали				
												
	h	b	L	L1	h1	f	Под- кладка под резец	Болт	Пла- стина	Винт с двойной головкой	Гаеч- ный ключ	
MCLNR/L1616H12	CN□□ 1204□□	16	16	100	16.0	16	20	SC1204	CTM617	HL1814	ML0625	L2.5 L3.0
MCLNR/L2020K12		20	20	125	25.0	20	32					
MCLNR/L2525M12		25	25	150	32.0	25	32					
MCLNR/L3232P12		32	32	170	40.0	32	32					
MCLNR/L4040R12	CN□□ 1606□□	40	40	200	50	40	40	SC1604	CTM822	HL2217	ML0830	L4.0 L5.0
MCLNR/L2525M16		25	25	150	32.0	25	33					
MCLNR/L3232P16		32	32	170	40.0	32	33					
MCLNR/L4040R16		40	40	200	50	40	40					
MCLNR/L3232P19	CN□□ 1906□□	32	32	170	40.0	32	32	SC1904	CTM1022	HL2217	ML0830	L4.0 L5.0
MCLNR/L4040R19		40	40	200	50	40	40					