


- ▶ Front panel mounting
- ▶ Mounting aperture 50 x 25mm
- ▶ Without zero reset

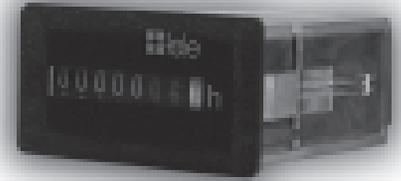

## ▶ Technical data

### ▶ 1. Indicator

Counter capacity:	99 999h
Accuracy of reading:	0.1h
Numeral colour:	white, decimal figures red
Numeral height:	4.4mm
Operation indicator:	flashing LED

### ▶ 2. Mechanical design

Self-extinguishing plastic housing, IP rating IP54 (on the front)	
Class of protection III (up to 48V DC)	
Front panel mounting	
Shockproof terminal connection according to VBG 4 (terminals IP rating IP20 / AMP plug-type connections 6.3 x 0.8mm)	
Initial torque:	max. 2.4Nm
Terminal capacity:	cylinder head bolt M3x5, DIN 84

### ▶ 3. Input circuit

Supply voltage:	12 to 48V DC
Tolerance:	±10%
Rated consumption:	12V DC          approx. 20mW

### ▶ 4. Ambient conditions

Ambient temperature:	-10 to +50°C
Storage temperature:	-10 to +50°C
Transport temperature:	-10 to +50°C
Relative humidity:	<90%

### ▶ 5. Accessories

SB-TBX30:	Retaining clip for fixing the device in front panel aperture
-----------	---

## ▮ Dimensions

