

	Product Information XST50-200/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Part NO.	50010453
----------	----------

Product Picture	Note
	Water supply: Water filtration and transportation, the main pipeline pressurization; Pressurization for high-rise buildings, hotels, etc. Industry: Flushing and cleaning system, boiler feed water, cooling water circulation, water treatment system, equipment supporting system. water treatment: Ultrafiltration system, reverse osmosis system, distillation system, separator, swimming pool. Other: Air conditioning system; heating system; agricultural irrigation, fire fighting system

Nameplate parameters

flow	60 m ³ /h
head	45 m
Efficiency	72 %
speed	2900 rpm
number of stages	1

Technical

Flow range (m ³ /h)	6-72m ³ /h
Curve tolerance	ISO 9906 Annex A
Maximum lift (m)	57.5m
Maximum Altitude	1000m



Material

Impeller	HT200/06Cr19Ni10
Pump inlet	HT200
Pump shaft	45/06Cr19Ni10
Fan cover	
O-ring	NBR
Rear end cover	
Connector	HT200
Fan	
Cover box	
Supporting foot	
Guard plate	06Cr19Ni10

Working conditions

Medium temperature (°C)	-10°C+85°C
Max. ambient temperature (°C)	+40°C
Pumped medium	Liquid without solid particles and long fiberslow viscositynon-combustiblenon-corrosion liquid or other
Critical cavitation margin(m)	2.5m
Working pressure	12bar

Installation

Structure Type	Standard motor (sleeve shaft)
Connection method	Flange connection / thread-connection
Inlet diameter (mm)	DN65
Outlet diameter (mm)	DN50


Motor

Motor phase	Three phase
-------------	-------------

	Product Information XST50-200/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	


Protection class	IP55
Motor poles	2
Insulation class	F
Motor power (KW)	11KW
Motor model	IE2-160M1-2(B35)
Frequency	50Hz
Rated voltage (V)	380V
Rated current (A)	21.0A
Efficiency class	IE2
Power factor	0.89
Seal	
Mechanical seal	TF PB20-30
Weight/Packaging	
Net weight (kg)	158kg
Gross weight (kg)	178kg
Package size	910x405x600mm
	

	Performance Curve XST50-200/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

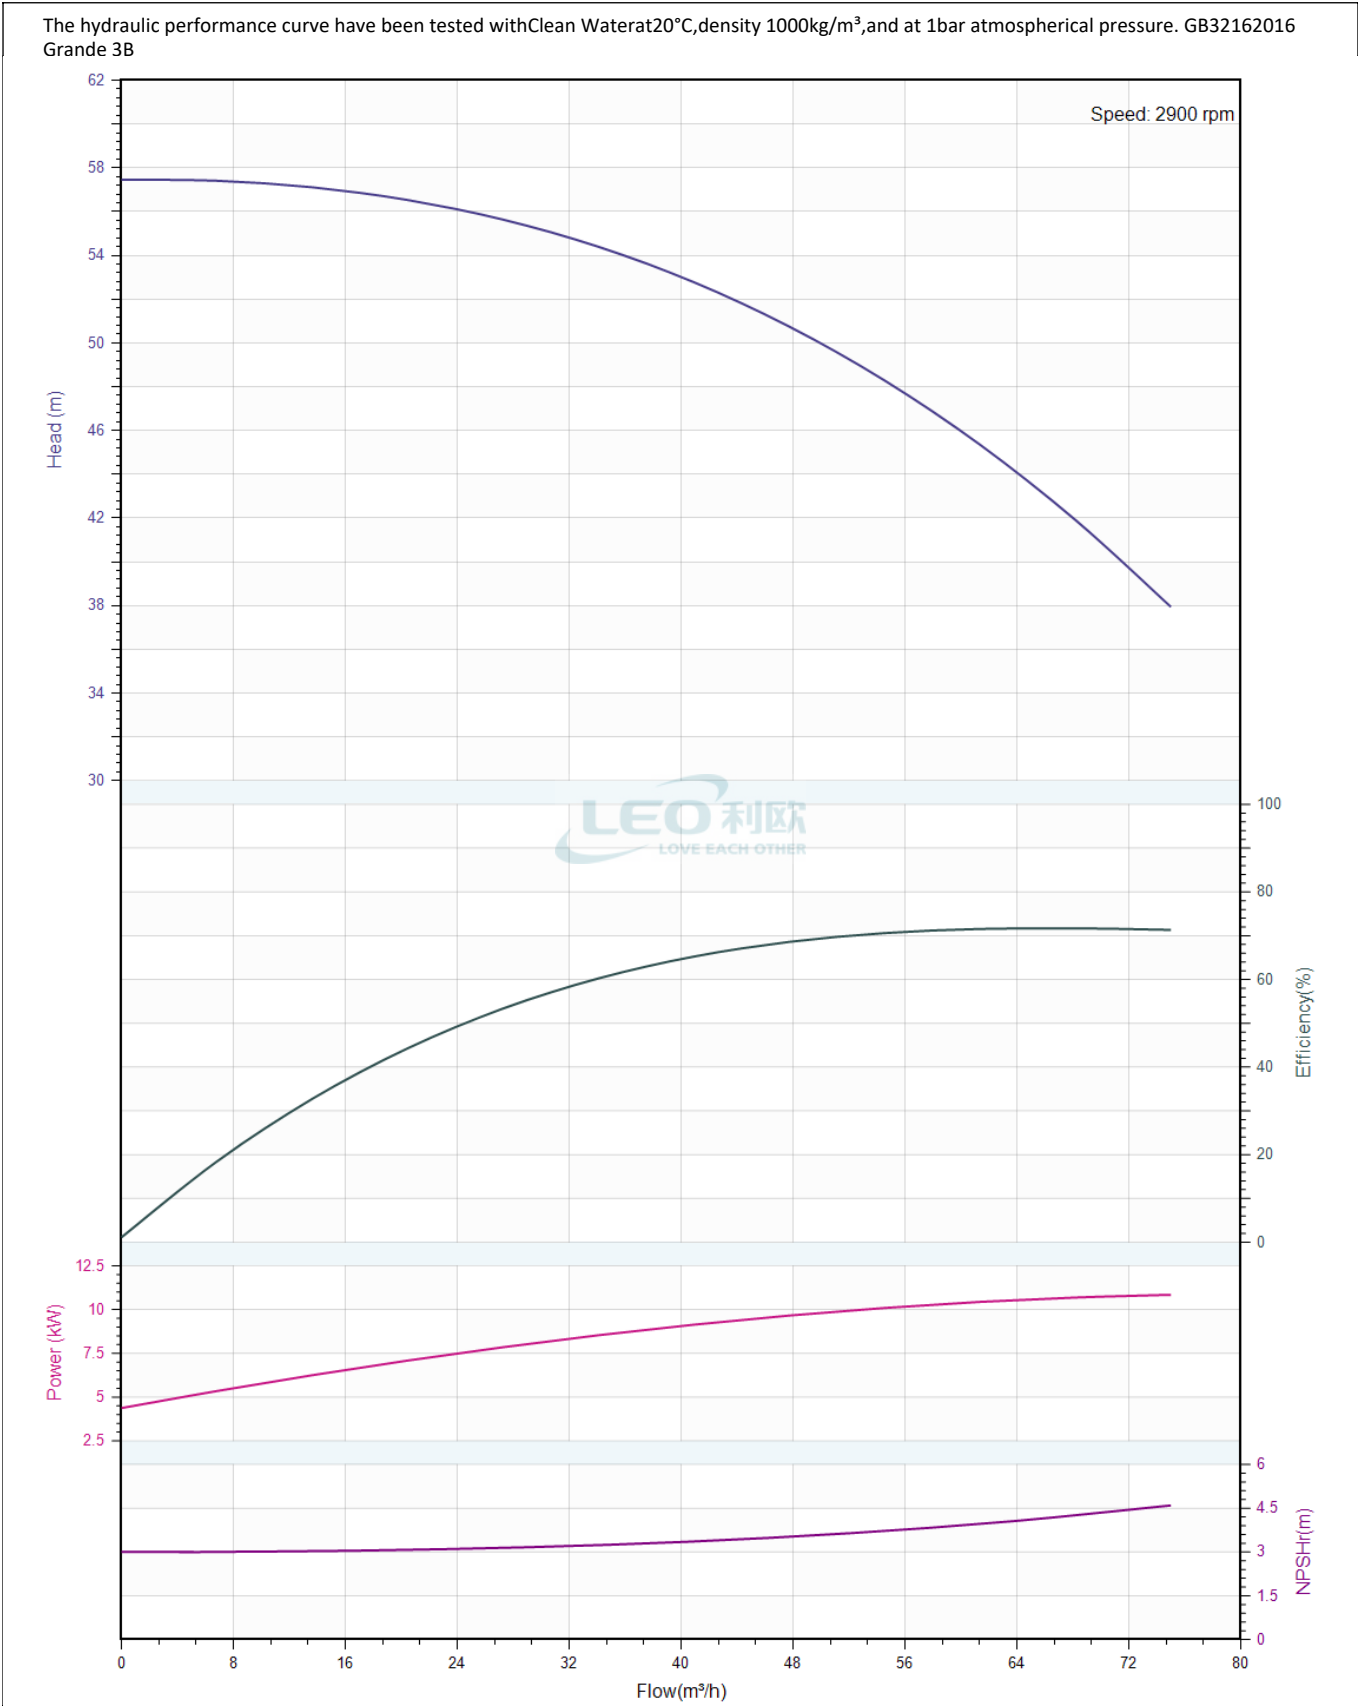

	Pump Technical Parameters XST50-200/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Rated parameters	
Pump model	XST50-200/110
Part NO.	50010453
Rated flow	60 m³/h
Rated head	45 m
Rated efficiency (%)	72
Power (kW)	10.2
NPSHr (m)	2.5
Speed (rpm)	2900
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

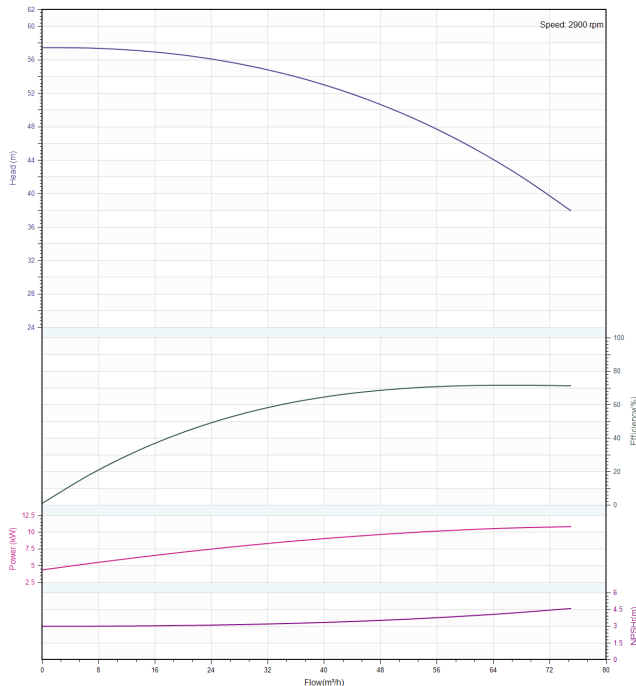

Speed: 2900 rpm

Flow (m³/h)	Head (m)	Efficiency (%)	Power (kW)
0	58	10	3.5
10	57	25	4.0
20	55	45	4.5
30	52	60	5.0
40	48	72	5.5
50	42	78	6.0
60	38	78	6.5
70	35	78	7.0
80	32	78	7.5



	Order Data XST50-200/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
		Client Name	LEO Sibir LLC
Project Name		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Pump model XST50-200/110
Part NO. 50010453
Product price
Quantity 1
Total price

Inquiry notes

