


	Product Information XST65-160/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Part NO.	50010452		
Product Picture		Note	
		Water supply: Water filtration and transportation, the main pipeline pressurization; Pressurization for high-rise buildings, hotels, etc. Industry: Flushing and cleaning system, boiler feed water, cooling water circulation, water treatment system, equipment supporting system. water treatment: Ultrafiltration system, reverse osmosis system, distillation system, separator,swimming pool. Other: Air conditioning system; heating system; agricultural irrigation,fire fighting system	
Nameplate parameters			
flow	74 m³/h		
head	33 m		
Efficiency	72 %		
speed	2900 rpm		
number of stages	1		
Technical			
Flow range (m³/h)	7.4-120m3/h		
Curve tolerance	ISO 9906 Annex A		
Maximum lift (m)	36m		
Maximum Altitude	1000m		
			
Material			
Impeller	HT200/06Cr19Ni10		
Pump inlet	HT200		
Pump shaft	45/06Cr19Ni10		
Fan cover			
O-ring	NBR		
Rear end cover			
Connector	HT200		
Fan			
Cover box			
Supporting foot			
Guard plate	06Cr19Ni10		
Working conditions			
Medium temperature (°C)	-10°C+85°C		
Max. ambient temperature (°C)	+40°C		
Pumped medium	Liquid without solid particles and long fiberslow viscositynon-combustiblenon-corrosion liquid or other		
Critical cavitation margin(m)	3.5m		
Working pressure	12bar		
Installation			
Structure Type	Standard motor (sleeve shaft)		
Connection method	Flange connection / thread-connection		
Inlet diameter (mm)	DN80		
Outlet diameter (mm)	DN65		
Motor			
Motor phase	Three phase		

	Product Information XST65-160/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	


Protection class	IP55
Motor poles	2
Insulation class	F
Motor power (KW)	11KW
Motor model	IE2-160M1-2(B35)
Frequency	50Hz
Rated voltage (V)	380V
Rated current (A)	21.0A
Efficiency class	IE2
Power factor	0.89
Seal	
Mechanical seal	TF PB20-30
Weight/Packaging	
Net weight (kg)	158kg
Gross weight (kg)	179kg
Package size	910x405x600mm
	

	Performance Curve XST65-160/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

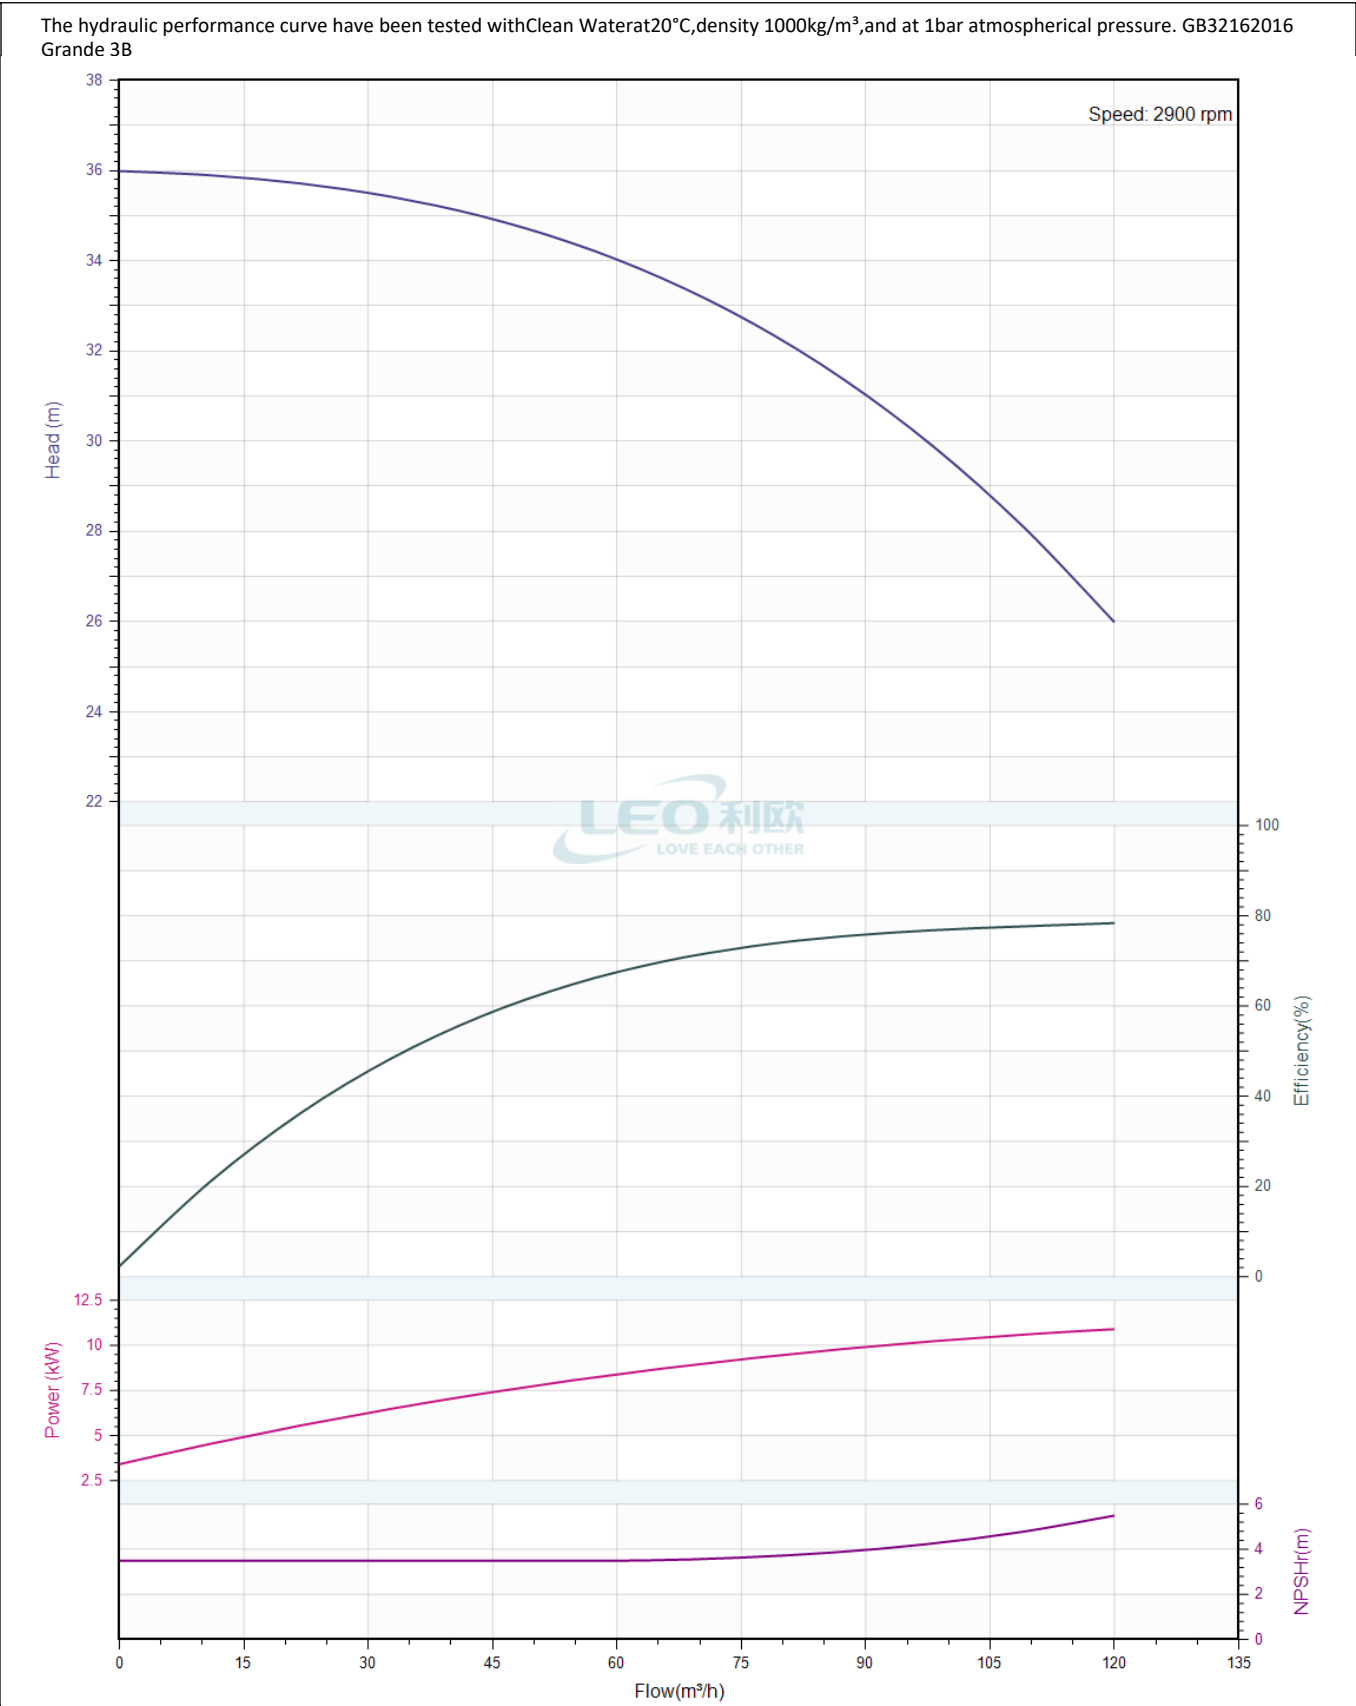

	Pump Technical Parameters XST65-160/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Rated parameters	
Pump model	XST65-160/110
Part NO.	50010452
Rated flow	74 m³/h
Rated head	33 m
Rated efficiency (%)	72
Power (kW)	9.24
NPSHr (m)	3.5
Speed (rpm)	2900
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

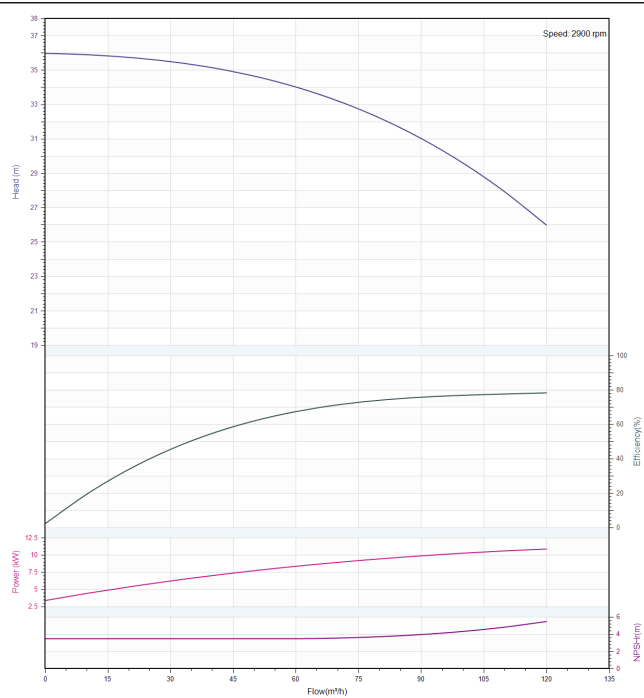

	Order Data XST65-160/110	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Pump model XST65-160/110

Part NO. 50010452

Product price

Quantity 1

Total price

Inquiry notes

