


	Product Information LPP80-21.5-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Part NO.	LPP80-21.5-7.5/2		
Product Picture		Note	
		: CFD	
Nameplate parameters			
flow	90 m³/h		
head	21.5 m		
speed	2950 rpm		
number of stages	1		
Technical			
Curve tolerance	ISO9906 AnnexA		
Maximum lift (m)	28		
Minimum usage flow (m³/ h)	9		
Maximum use flow (m³/ h)	119		
Material			
Impeller	HT200		
Pump inlet	HT200		
Pump shaft	AISI304		
Mechanical seal	SiC/C		
O-ring	NBR		
Working conditions			
Max. ambient temperature (°C)	40		
Max. liquid temperature (°C)	90		
Pumped medium			
Working pressure	16bar		
Installation			
Inlet & Outlet Diameter	DN80		
Connection standard	DIN		
Motor			
Motor phase	Three phase		
Protection class	IP55		
Motor poles	2		
Insulation class	F		
Motor power (KW)	7.5KW		
Frequency	50		
Rated voltage (V)	380		
Rated current (A)	14.3717474265847		
Efficiency class	IE3		
Power factor	0.88		

	Product Information LPP80-21.5-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	


Drive end bearing	7308
Non-drive end bearing	6306
Efficiency (%)	90.1
Weight/Packaging	
Gross weight (kg)	147
Package size	990*510*555
	

	Performance Curve LPP80-21.5-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

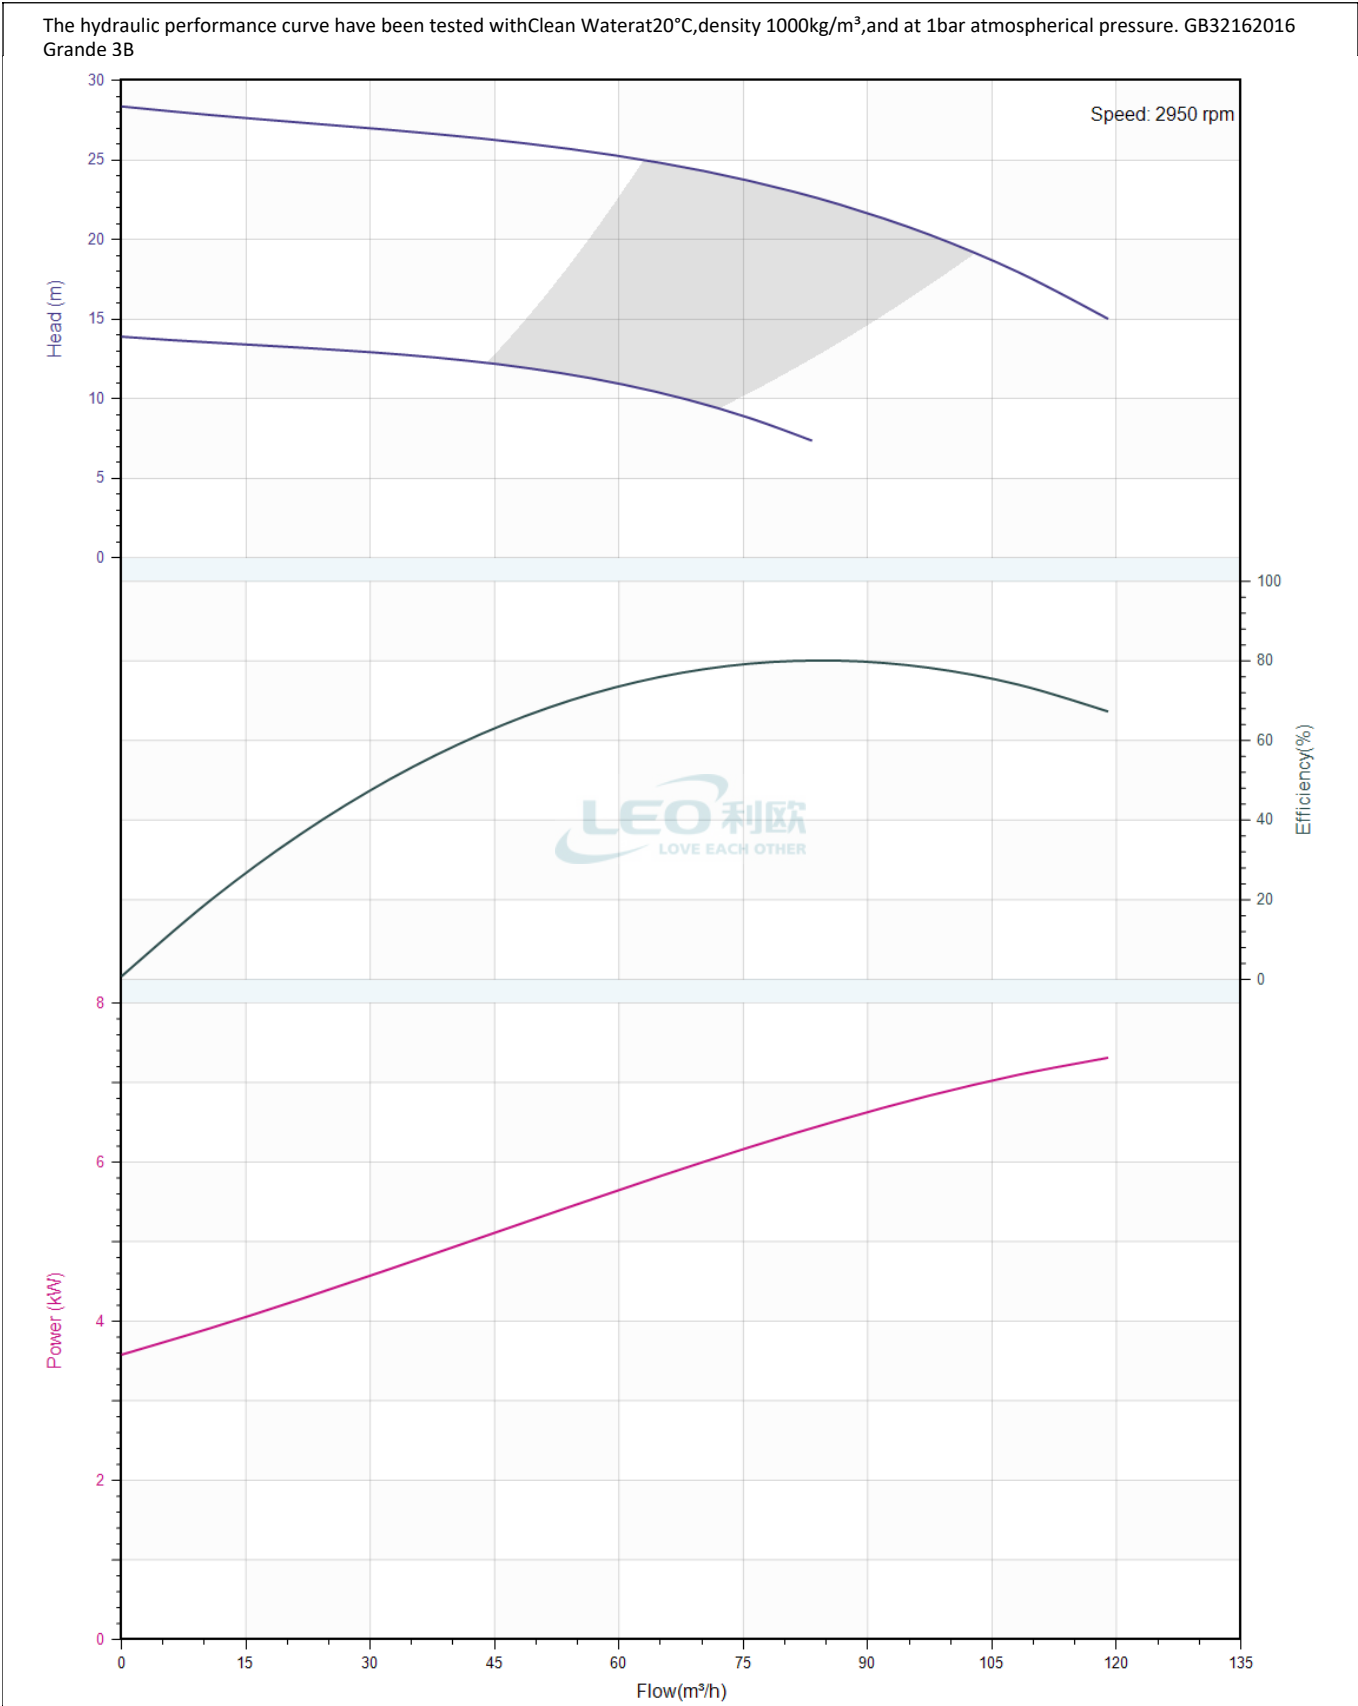

	Pump Technical Parameters LPP80-21.5-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Rated parameters	
Pump model	LPP80-21.5-7.5/2
Part NO.	LPP80-21.5-7.5/2
Rated flow	90 m³/h
Rated head	21.5 m
Rated efficiency (%)	80
Power (kW)	6.59
Speed (rpm)	2950
Max impeller diameter (mm)	148
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

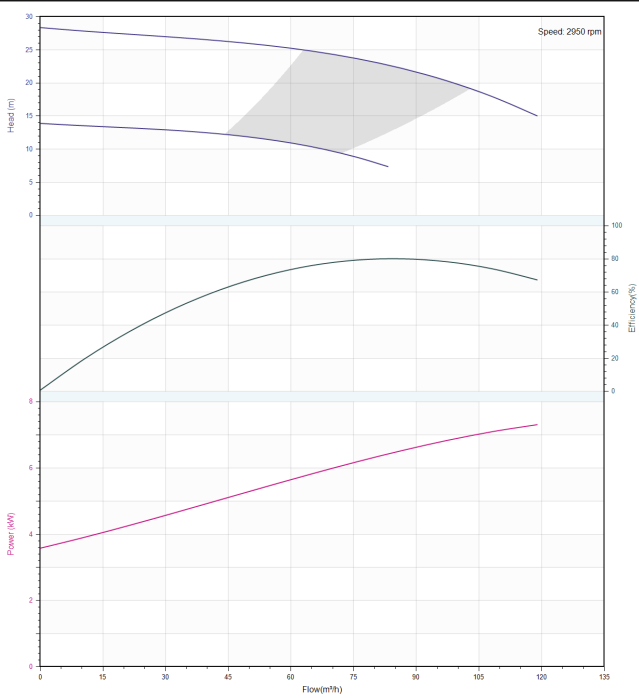

	Installation picture LPP80-21.5-7.5/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

