


Модель	A	B	C	D	E	F	G	H	J	K	L	M	N макс.	N мин.	O макс.	O мин.	P макс.	P мин.	Q	R	S	T	U макс.	V	W	Схема
N-205A4	135	71	110	14	15	63.513	96	82.55	15.5	3xM10	33	4	26.5	23.8	19.75	7.75	16	6	2	10	20	23	M40x1.5	3xM6	45	рис. 1
N-206A5	169	91	140	20	15	82.563	116	104.78	16	6xM10	45	5	32	29.25	22.75	9.25	26	14	2	12	19	32	M55x2	3xM6	60	рис. 1
N-208A5	210	109	170	25	23	82.563	133.35	104.78	13	6xM12	52	5	38.7	35	29.75	14.75	37.5	21.5	2	14	20.5	37	M60x2	6xM10	66	рис. 2
N-208A6	210	103	170	25	17	106.375	150	133.35	18	6xM12	52	5	38.7	35	29.75	14.75	31.5	15.5	2	14	20.5	37	M60x2	3xM6	66	рис. 1
N-210A6	254	120	220	30	25	106.375	171.45	133.35	18	6xM16	75	5	51	46.6	33.75	14.25	33.5	14.5	2	16	25	42	M85x2	6xM12	94	рис. 2
N-210A8	254	113	220	30	18	139.719	190	171.45	24	6xM16	75	5	51	46.6	33.75	14.25	26.5	7.5	2	16	25	42	M85x2	6xM8	94	рис. 1
N-212A8	304	122	220	30	18	139.719	190	171.45	25	6xM20	91	6	61.3	56	45.75	15.75	26	3	2	21	28	52	M100x2	6xM8	108	рис. 1
N-215A8	381	160	300	43	33	139.719	235	171.45	24	6xM20	117.5	6	82	76.7	45.25	16.75	40	17	5	24	43	62	M130x2	6xM16	139	рис. 2
N-215A11	381	149	300	43	22	196.869	260	235	28	6xM20	117.5	6	82	76.7	45.25	16.75	29	6	5	24	43	62	M130x2	3xM10	139	рис. 1
N-218A8	450	160	300	43	33	139.719	235	171.45	24	6xM20	117.5	6	82	76.7	79.25	16.75	40	6	5	24	43	62	M130x2	6xM16	139	рис. 2
N-218A11	450	149	300	43	22	196.869	260	235	28	6xM24	117.5	6	82	76.7	79.25	16.75	29	6	5	24	43	62	M130x2	3xM10	139	рис. 1
N-220A11	510	169	380	60	41	196.869	330.2	235	30	6xM24	180	6	112.5	107.2	60.5	24.5	52	29	5	25	38	65	M190x2	6xM20	206	рис. 2
N-220A15	510	155	380	60	27	285.775	330.2	330.2	33	6xM24	180	6	112.5	107.2	60.5	24.5	38	15	5	25	38	65	M190x2	3xM12	206	рис. 1
N-224A11	610	186	520	60	45	196.869	463.6	235	28	6xM24	205	6	139.9	139.9	87.5	24.5	61	35	5	25	38	65	M215x3	6xM20	230	рис. 2
N-224A15	610	183	520	60	42	285.775	463.6	330.2	33	6xM24	205	6	139.9	139.9	87.5	24.5	58	32	5	25	38	65	M215x3	6xM24	230	рис. 2
N-224A20	610	166	520	60	25	412.775	463.6	463.6	35	6xM24	205	6	139.9	139.9	87.5	24.5	41	15	5	25	38	65	M215x3	3xM10	230	рис. 1

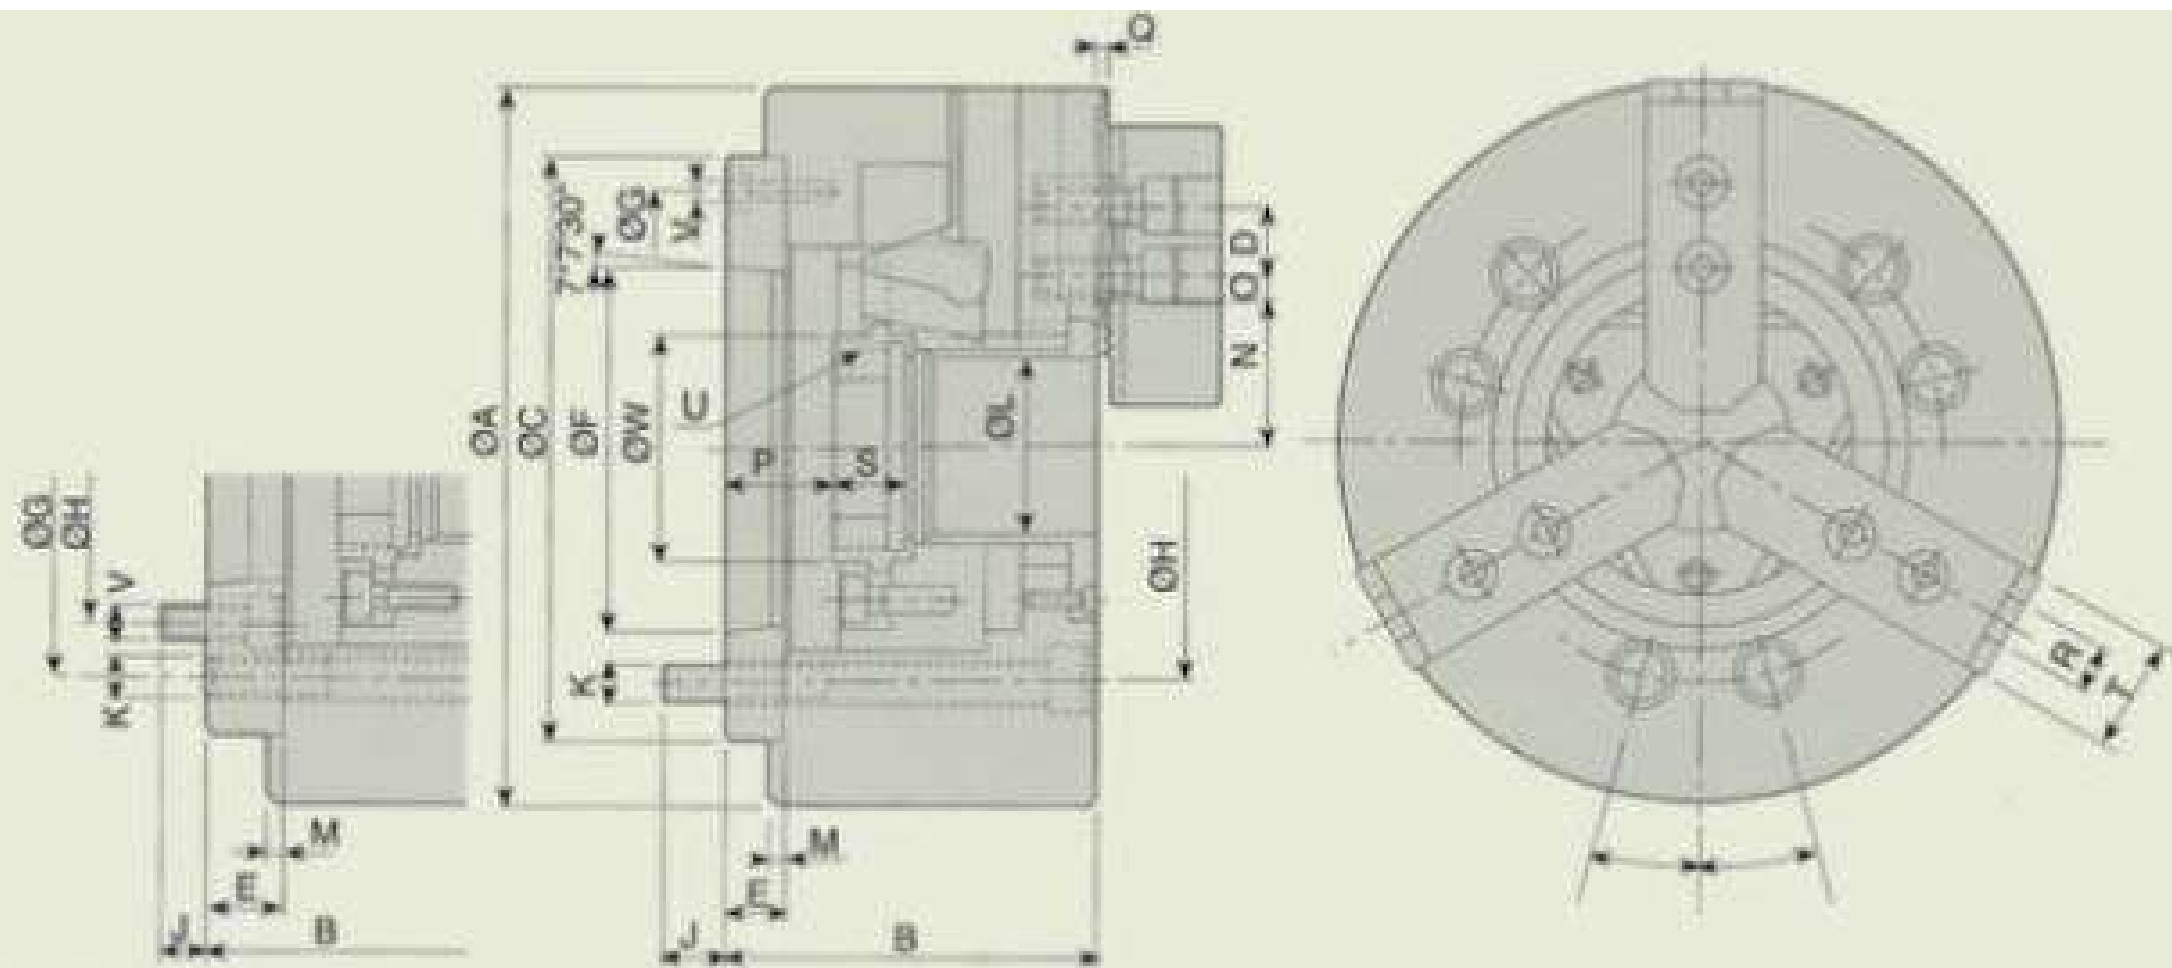

Модель	Отверстие (мм)	Ход тяги (мм)	Ход кулачков (мм)	Макс. усилие тяги (кгс)	Предельное усилие зажима (кгс)	Макс. рабочее давление (мгс/см ²)	Макс. скорость (об/мин)	Масса (кг)	Тип цилиндра	Момент инерции (мгс/см ²)	Тип сырых кулачков	Диапазон зажима	Тип закаленных кулачков
N-205A4	Ø33	10	5.4	1784	3671	29.6	7000	7.8	M1036	0.020	HC05	Ø6~Ø135	HJ05
N-206A5	Ø45	12	5.5	2243	5812	28.5	6000	14.7	M1246	0.062	HC06	Ø15~Ø169	HJ06
N-208A5	Ø52	16	7.4	3508	8973	26.5	4900	25.8	M1552	0.190	HC08	Ø20~Ø210	HJ08
N-208A6	Ø52	16	7.4	3508	8973	26.5	4900	25	M1552	0.184	HC08	Ø20~Ø210	HJ08
N-210A6	Ø75	19	8.8	4385	11319	27.5	4200	41	M1875	0.370	HC10	Ø25~Ø254	HJ10
N-210A8	Ø75	19	8.8	4385	11319	27.5	4200	38	M1875	0.340	HC10	Ø25~Ø254	HJ10
N-212A8	Ø91	23	10.6	5812	14990	27.5	3400	59.5	M2091	0.770	HC12	Ø30~Ø304	HJ12
N-215A8	Ø117.5	23	10.6	7240	18355	23.5	2500	125	M2511	2.255	HC15	Ø60~Ø381	HJ15
N-215A11	Ø117.5	23	10.6	7240	18355	23.5	2500	118	M2511	2.241	HC15	Ø60~Ø381	HJ15
N-218A8	Ø117.5	23	10.6	7240	18355	23.5	2000	178	M2511	4.830	HC15	Ø60~Ø450	HJ15
N-218A11	Ø117.5	23	10.6	7240	18355	23.5	2000	171	M2511	4.464	HC15	Ø60~Ø450	HJ15
N-220A11	Ø180	23	10.6	9177	23861	30.5	1800	215	M2511	7.355	HC24-1	Ø120~Ø510	HJ24-1
N-220A15	Ø180	23	10.6	9177	23861	30.5	1800	202	M2511	6.910	HC24-1	Ø120~Ø510	HJ24-1
N-224A11	Ø205	26	12	9177	23861	30.5	1400	332	M2511	18.199	HC24-1	Ø150~Ø610	HJ24-1
N-224A15	Ø205	26	12	9177	23861	30.5	1400	317	M2511	17.376	HC24-1	Ø150~Ø610	HJ24-1
N-224A20	Ø205	26	12	9177	23861	30.5	1400	286	M2511	15.677	HC24-1	Ø150~Ø610	HJ24-1