
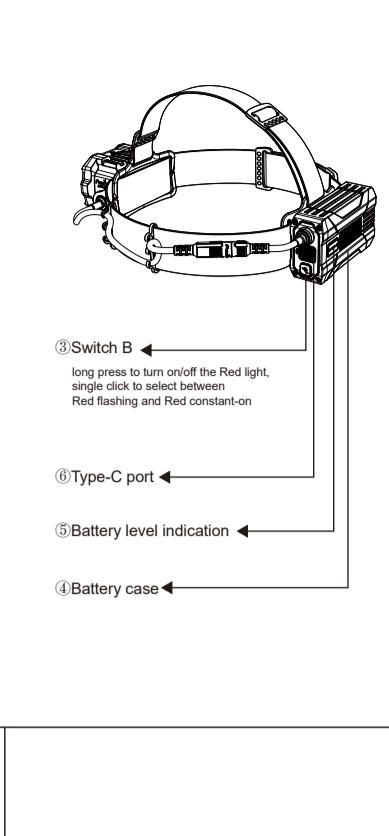
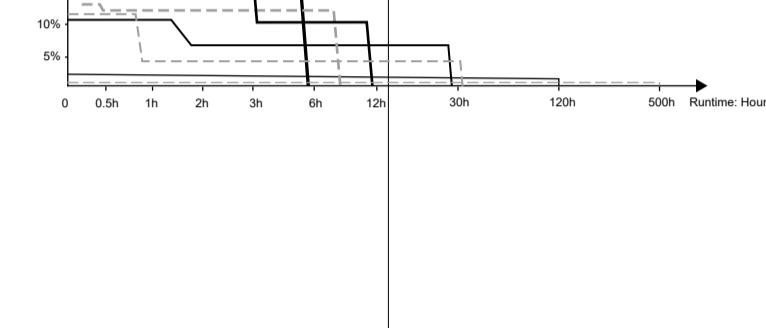


FENIX
LIGHTING FOR EXTREMES

HP35R

MULTIPLE LIGHT SOURCES HIGH-OUTPUT SEARCH&RESCUE HEADLAMP

4000 LUMENS MAX
OUTPUT450 METERS MAX BEAM
DISTANCE

LIGHTING FOR EXTREMES



FACEBOOK



WECHAT


"Follow" us for more information about Fenix.

FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93 Fax: +86-755-29631181
E-mail: info@fenixlight.com Web: www.fenixlight.com
Address: 2/F/F, West of Building A, Xinghong Technology Park, 111 Shuiku Road, Fenghuangang Community, Xiangji Street, Bao'an District, Shenzhen City, Guangdong Province, China



61.149.221.110-A1-20240617

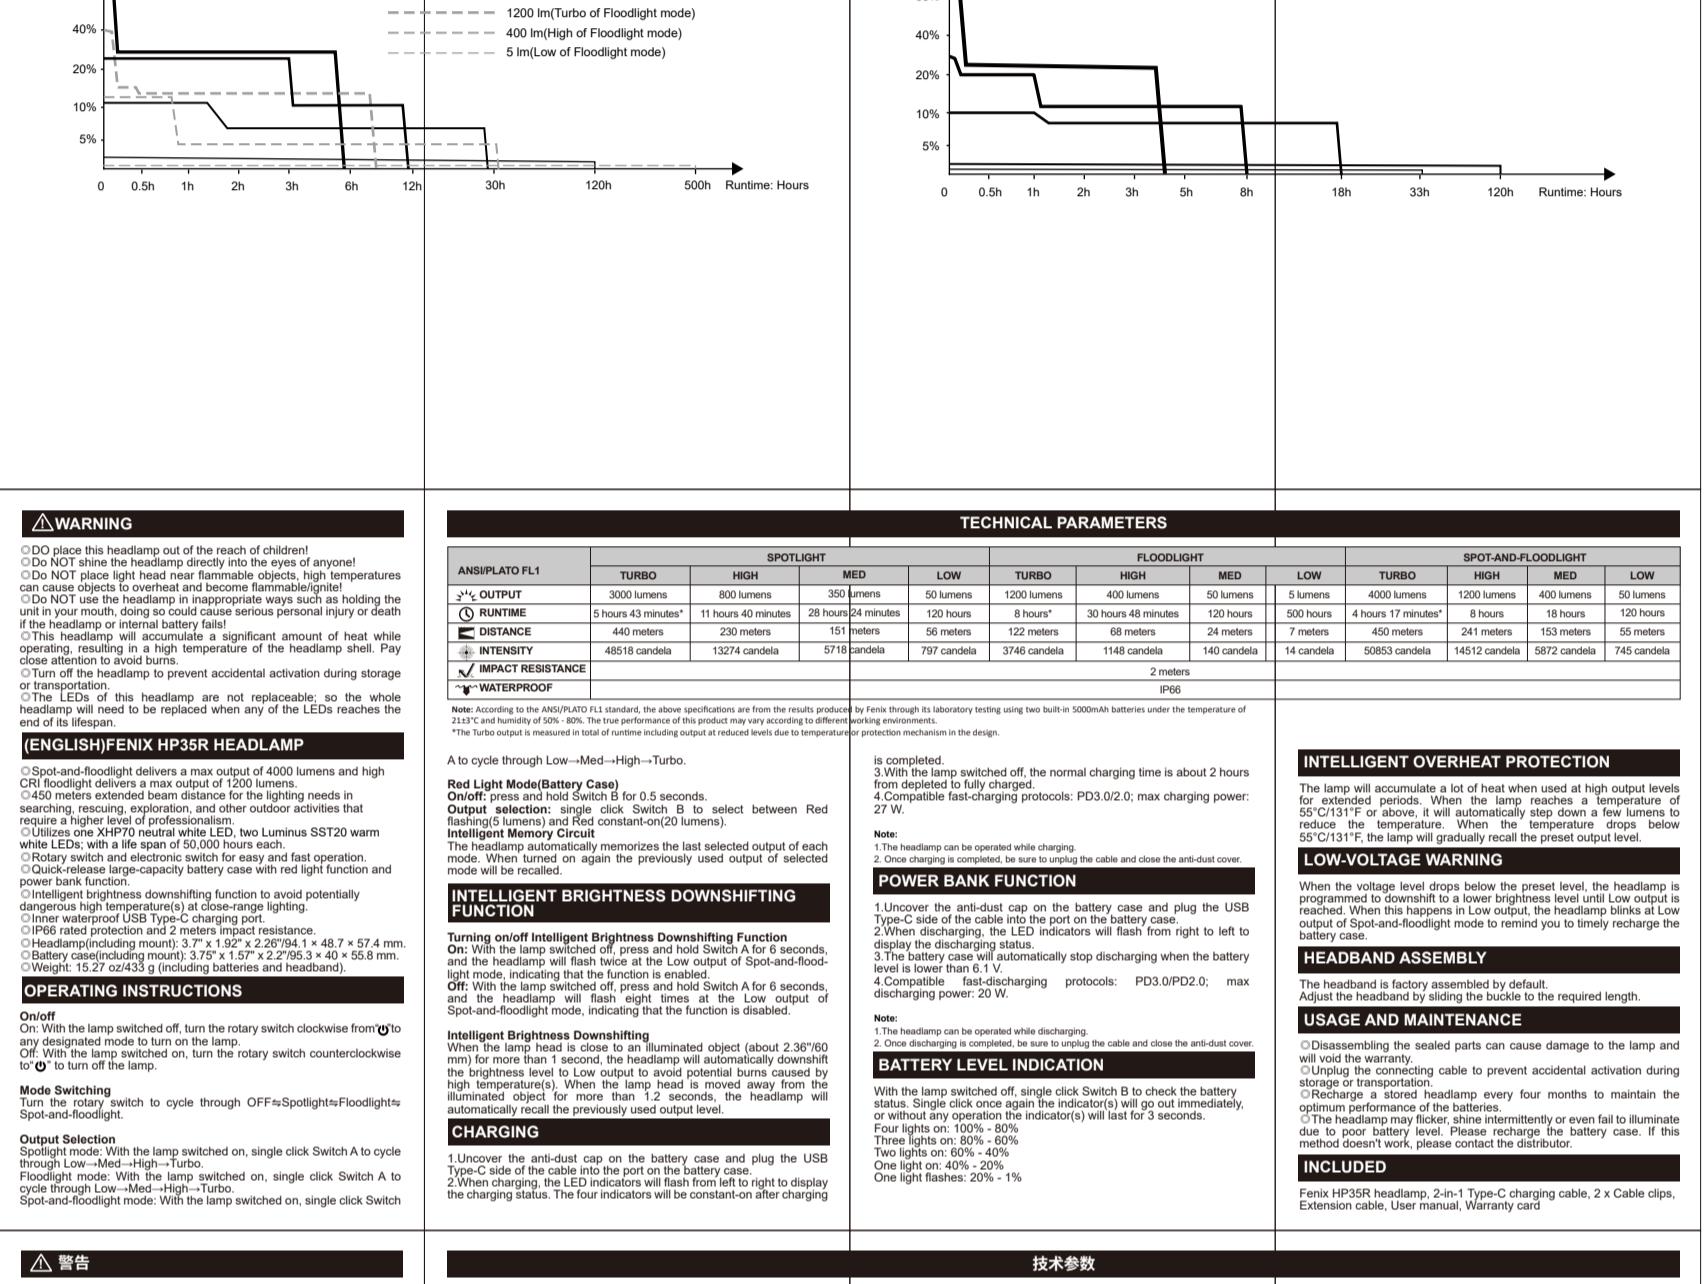

WARNING

- Do not place this headlamp out of the reach of children!
- Do NOT shine the headlamp directly into the eyes of anyone!
- Do NOT place light head near flammable objects, high temperatures can cause objects to overheat and become flammable/gnif!
- Do NOT use the headlamp in inappropriate ways such as holding the unit up while running so as to avoid serious personal injury or death if the headlamp or internal battery fails!
- This headlamp will accumulate a significant amount of heat while operating, resulting in a high temperature of the headlamp shell. Pay close attention to avoid burns.
- Turn off the headlamp to prevent accidental activation during storage or transportation.
- The LEDs of this headlamp are not replaceable; so the whole headlamp will need to be replaced when any of the LEDs reaches the end of its lifespan.

(ENGLISH)FENIX HP35R HEADLAMP

- Spot-and-floodlight delivers a max output of 4000 lumens and high CRI floodlight delivers a max output of 1200 lumens.
- 450 meters beam distance for the lighting needs in searching, rescuing, exploration, and other outdoor activities that require long-range illumination.
- Utilizes one XHP70 neutral-white LED, two Luminus SST20 warm white LEDs, with a life span of 50,000 hours each.
- Rotary switch with electronic switch for fast and easy operation.
- One piece large-capacity battery case with red light function and power bank function.
- Intelligent brightness downshifting function to avoid potentially dangerous high temperatures by automatically dimming the light.
- Waterproof and dustproof rating of IP66.
- IP66 rated protection and 2 meters impact resistance.
- Headlamp(including mount): 3.75" x 1.92" x 2.26" / 94.1 x 48.7 x 57.4 mm.
- Battery case(including mount): 3.75" x 1.57" x 2.29" / 95.3 x 40 x 55.8 mm.
- Weight: 15.27 oz/433 g (including batteries and headband).

OPERATING INSTRUCTIONS

- On/off:** With the lamp switched off, turn the rotary switch clockwise from OFF to any designated mode to turn on the lamp.
- Off:** With the lamp switched on, turn the rotary switch counterclockwise to OFF to turn off the lamp.

- Mode Switching:** Turn the rotary switch to cycle through OFF→Spotlight→Floodlights→Spot-and-floodlight.

- Output Selection:** With the lamp switched on, single click Switch A to cycle through Low-Med-High-Turbo.

- Floodlight mode:** With the lamp switched on, single click Switch A to cycle through Low-Med-High-Turbo.

- Spot-and-floodlight mode:** With the lamp switched on, single click Switch A to cycle through Low-Med-High-Turbo.

- Intelligent Brightness Downtesting:** When the lamp head is close to an illuminated object (about 2.36/60 mm) for more than 1 second, the headlamp will automatically downshift the brightness level to Low output to avoid potential burns caused by high temperatures. When the lamp head is moved away from the illuminated object for more than 1.2 seconds, the headlamp will automatically recall the previously used output mode.

- Waterproof and Dustproof:** IP66.

- Impact Resistance:** Impact resistance of 2 meters.

- Temperature:** Operates from 0°C to 55°C.

- Storage:** Storage temperature range: -20°C to 60°C.

- Transport:** Transport temperature range: -20°C to 60°C.

- Headband:** Headband made of flexible elastic material.

-

