


Audible Signal Devices

MS 190 Mini Motor Siren

Motor Sirens





FEATURES

- MS 190 produces high volume in short time
- Due to high rpm it should be stopped after 2 minutes
- It's highly effective for short periods
- Clear and piercing sound signal

SPECIFICATION

Voltage range	220V AC	110V AC	24V AC/DC	12V AC/DC
Current range	0.43A	0.9A	2.5A	6A
Weight (kg)	0.55	0.55	0.4	0.4
Power	40W			
Sound Volume	115dB (at 1m)			
Tone	motor siren			
Insulation resistance :	100MO(at 500 VDC)			
Dielectric strength :	500VAC, 50/60Hz in 1 minute			
Materials	Steel & ABS(propeller)			
Protection Rate	IP44			

DRAWINGS

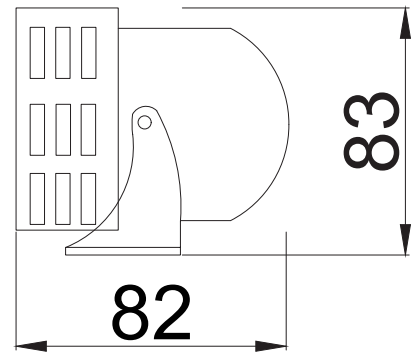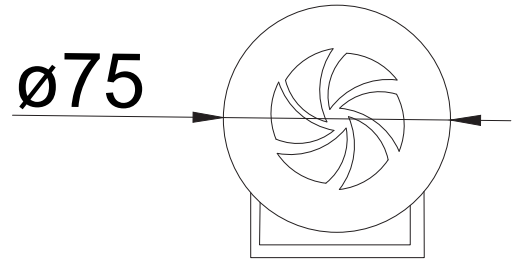

ORDER DATA

Voltage	Order number
220V AC	MS 190.220VAC
110V AC	MS 190.110VAC
24V AC/DC	MS 190.24VAC/DC
12V AC/DC	MS 190.12VAC/DC