


Visual and Audible Signalling Equipments

MS 742 Ø90 LED Beacon with Buzzer




SPECIFICATION

Voltage range (V)	85-260VAC	12-60VAC/DC
Current range(MA)	40-20	300-60
Power range(W)	4.5	
LED Bin Code	6000-6500K	
Light Intensity(MCD)	132000	
Working Mode	3 flashing 6 flashing 10 flashing steady on 60FPM 90FPM 150FPM double flash slow rotation fast rotation random	
Materials	Lens PC, Body-ABS	
Tone	Pulse tone	
Sound Volume	100dB at 1m	
Protection Rate	IP65	

FEATURES

- Ø90mm LED warning beacon
- Reflector with multi-tiered design provides an even and clear illumination throughout the entire lens
- Easy and reliable installation
- Built in buzzer

DRAWINGS

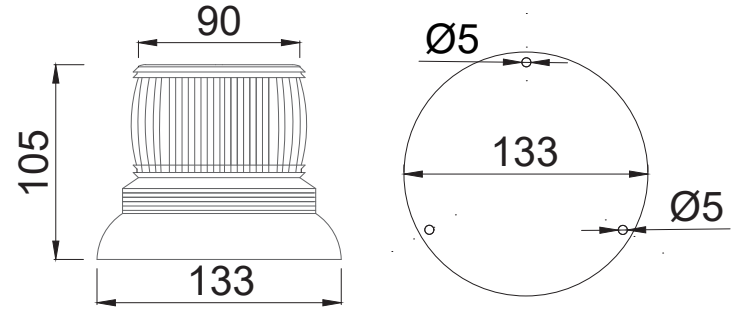

- Product can be wired regardless of polarity.

ORDER DATA

Color	Voltage	Order number
Red	85-260VAC	MS 742.1.85-260VAC
	12-60VAC/DC	MS 742.1.12-60VAC/DC
Green	85-260VAC	MS 742.2.85-260VAC
	12-60VAC/DC	MS 742.2.12-60VAC/DC
Yellow	85-260VAC	MS 742.3.85-260VAC
	12-60VAC/DC	MS 742.3.12-60VAC/DC
White	85-260VAC	MS 742.4.85-260VAC
	12-60VAC/DC	MS 742.4.12-60VAC/DC
Blue	85-260VAC	MS 742.5.85-260VAC
	12-60VAC/DC	MS 742.5.12-60VAC/DC