



ECO CLASS DL







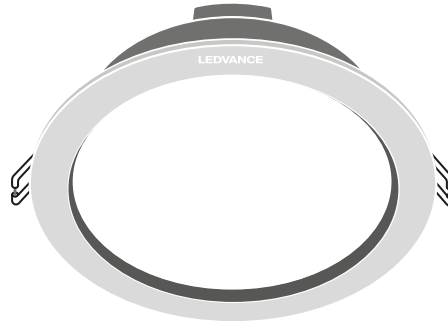


	EAN	W	lm	K	Ra	Ø x h [mm]	⚙
ECOCCLASS DL8W 840 WTIP44 FC RET RU LEDV	4058075644199	8	760	4000	>80	115x42	70
ECOCCLASS DL8W 865 WTIP44 FC RET RU LEDV	4058075644212	8	760	6500	>80	115x42	70
ECOCCLASS DL12W 840 WTIP44 FC RET RU LEDV	4099854251290	12	1140	4000	>80	165x42	140
ECOCCLASS DL12W 865 WTIP44 FC RET RU LEDV	4099854251313	12	1140	6500	>80	165x42	140
ECOCCLASS DL13W 840 WTIP44 FC RET RU LEDV	4058075644236	13	1235	4000	>80	165x42	140
ECOCCLASS DL13W 865 WTIP44 FC RET RU LEDV	4058075644250	13	1235	6500	>80	165x42	140
ECOCCLASS DL15W 840 WTIP44 FC RET RU LEDV	4099854251337	15	1425	4000	>80	165x42	140
ECOCCLASS DL15W 865 WTIP44 FC RET RU LEDV	4099854251351	15	1425	6500	>80	165x42	140
ECOCCLASS DL18W 840 WTIP44 FC RET RU LEDV	4058075644274	18	1710	4000	>80	190x42	197
ECOCCLASS DL18W 865 WTIP44 FC RET RU LEDV	4058075644298	18	1710	6500	>80	190x42	197
ECOCCLASS DL24W 840 WTIP44 FC RET RU LEDV	4058075644311	24	2280	4000	>80	215x43	252
ECOCCLASS DL24W 865 WTIP44 FC RET RU LEDV	4058075644335	24	2280	6500	>80	215x43	252


	EAN	ℓ (°C)	V _{ac}	Hz	◊	PF
ECOCCLASS DL8W 840 WTIP44 FC RET RU LEDV	4058075644199	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL8W 865 WTIP44 FC RET RU LEDV	4058075644212	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL12W 840 WTIP44 FC RET RU LEDV	4099854251290	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL12W 865 WTIP44 FC RET RU LEDV	4099854251313	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL13W 840 WTIP44 FC RET RU LEDV	4058075644236	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL13W 865 WTIP44 FC RET RU LEDV	4058075644250	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL15W 840 WTIP44 FC RET RU LEDV	4099854251337	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL15W 865 WTIP44 FC RET RU LEDV	4099854251351	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL18W 840 WTIP44 FC RET RU LEDV	4058075644274	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL18W 865 WTIP44 FC RET RU LEDV	4058075644298	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL24W 840 WTIP44 FC RET RU LEDV	4058075644311	-20°...+40°C	220-240	50-60	100°	>0,5
ECOCCLASS DL24W 865 WTIP44 FC RET RU LEDV	4058075644335	-20°...+40°C	220-240	50-60	100°	>0,5













	Ø [mm]			
ECOCCLASS DL 8W 840/865 WT IP44	115	100	5-30	>65
ECOCCLASS DL 12W 840/865 WT IP44	165	150	5-30	>65
ECOCCLASS DL 13W 840/865 WT IP44	165	150	5-30	>65
ECOCCLASS DL 15W 840/865 WT IP44	165	150	5-30	>65
ECOCCLASS DL 18W 840/865 WT IP44	190	175	5-30	>65
ECOCCLASS DL 24W 840/865 WT IP44	215	200	5-30	>65

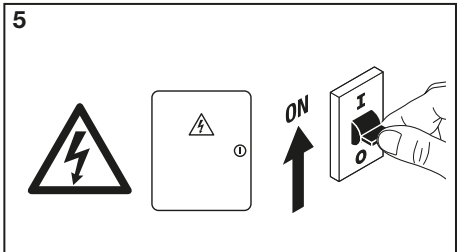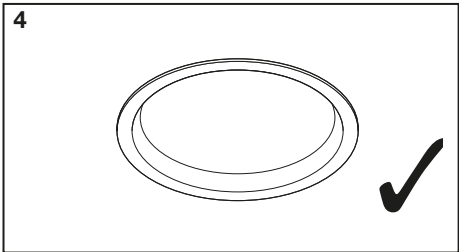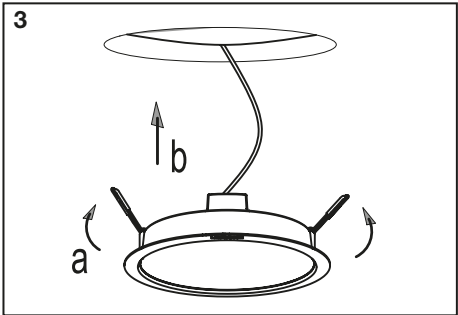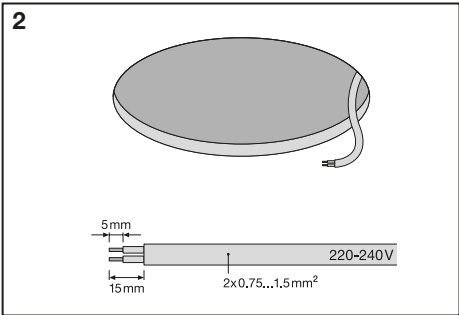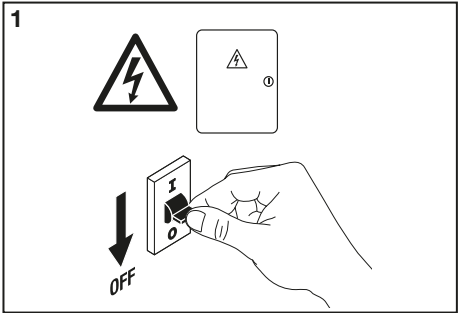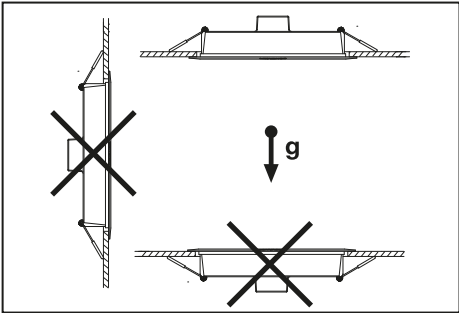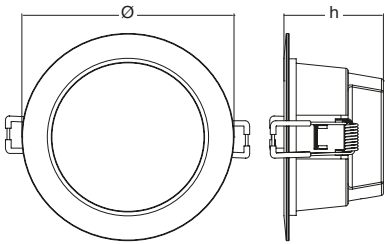

ECO CLASS DL



	EAN
ECOCCLASS DL FRAME 8W	4058075644359
ECOCCLASS DL FRAME 13W	4058075644397
ECOCCLASS DL FRAME 18W	4058075644434
ECOCCLASS DL FRAME 24W	4058075644458

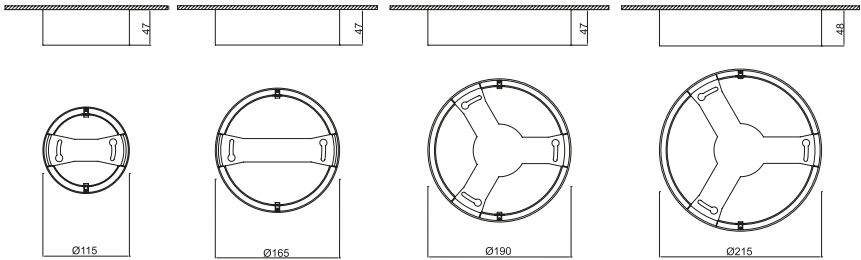

**NOT FOR PRINT
PRODUCTION!**

WARNING:

This PDF file is for reference only and not to be used for the creation of production art.
Colour printouts and screen displays should not be used for colour approval as colours may vary from device to device. The colour values for this file are defined in either Pantone (PMS), HKS, or in process colours (CMYK).
For obtaining hard-copies in actual size (1:1) you need to enter the proper settings in your printer options.

本品不可印刷生产

警告:

本PDF文档仅作为参照文件，不能将本文档用于印刷生产或者制作菲林。本文档的彩色打印版本或其在电脑屏幕中显示的色彩，不可用于最终的色彩参照。因为硬件或设备的差异，可能造成色彩的偏差。最终正式的色彩请遵照由色板卡片PMS，HKS或者CMYK(青红黄黑)所定义的色彩。若本文档的打印件要获取1:1的原始尺寸，须在打印选项中作出相应的设置。



LEDVANCE

IP44/IP20



C10449057
G11182186



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com