



**EMAS ELEKTROTEKNİK MAKİNA
SANAYİ VE TİCARET A.Ş**


Ziya Gökalp Mah. İkitelli Organize Sanayi Bölgesi
Atatürk Bulvarı No:50 34490 Başakşehir / İstanbul /
TÜRKİYE

Telefon : +90 212 549 22 52

Faks : +90 212 549 25 80

Web : www.emasas.com.tr

Technical Specifications : B101DS32

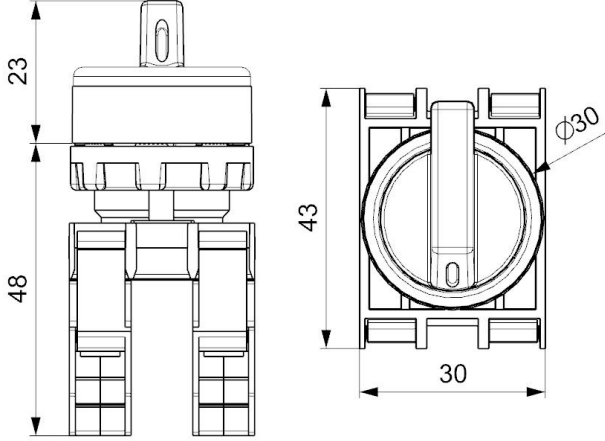

Order Code:

B101S32

Contact Block:

2 NO

Terminals with finger protection.

Fireproof plastic contact block body.

Sequential connectable body and contact blocks after lego magic.

Protective cable inlet tips enabling maximum safety.

Screw Washers.

Technical Information :

Body:

Plastic Body.

Opportunity of positioning with plates and Badge Bases.

Standards:

- TS EN 60947 -5-1

General Specifications

Operating Temperature	-5/+40°C
Mechanical life	0,5 Million (3000 open-close/hour)
Electrical Life	0,1 Million (1800 open-close/hour)
C.Block Tightening Torque	0,6-0,8 Nm
C.Block Connection Wire Profile	Min: 1x0,5 mm ²
Wire Profile	Max: 2x2,5 mm ²
Protection Degree	IP50

In contact Blocks;

- VDE 0660

- UL 508



Electrical Informations :

General Specifications

Range Of Use		AC15
Operating Voltage	Ue	250V AC
Fregquency	f	50Hz
Operating Current	Ie	4A
Insulation Resistance	Ui	300V
Stroke Resistance Voltage	Uimp	2.5kV
Dielectrical Strength		1500V AC