

Standard function type inductive sensors **LR30X** series



Features

- ◆ Non contact detection, safe and reliable;
- ◆ ASIC design;
- ◆ Perfect choice for metallic target detection;




Part number

AC 2 wires NO	LR30XCF10ATO	LR30XCN15ATO	AC 2 wires NC	LR30XCF10ATC	LR30XCN15ATC
---------------	--------------	--------------	---------------	--------------	--------------

Technical specifications

Mounting	Flush	Non-flush	Leakage current [Ir]	≤3mA	
Rated distance [Sn]	10mm	15mm	Circuit protection	...	
Assured distance [Sa]	0...8mm	0...12mm	Output indicator	Yellow LED	
Dimensions	M30*62mm	M30*74 mm	Ambient temperature	-25°C...70°C	
Output	NO/NC(depends on part number)		Ambient humidity	35-95%RH	
Supply voltage	20...250 VAC		Switching frequency [F]	20 Hz	20 Hz
Standard target	Fe 30*30*1t	Fe 45*45*1t	Voltage withstand	1000V/AC 50/60Hz 60S	
Switch-point drifts [%/Sr]	≤ ± 10%		Insulation resistance	≥50MΩ (500VDC)	
Hysteresis range [%/Sr]	1...20%		Vibration resistance	10...50Hz (1.5mm)	
Repeat accuracy [R]	≤ 3%		Degree of protection	IP67	
Load current	≤ 300mA		Housing material	Nickel-copper alloy	
Residual voltage	≤ 10V		Connection type	2m PVC cable	

Dimensions

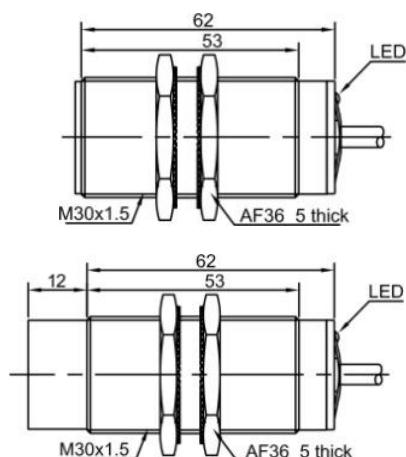

Wiring diagram

