

LT Series - ON/OFF LED Driver


ON/OFF



or



Dimensions

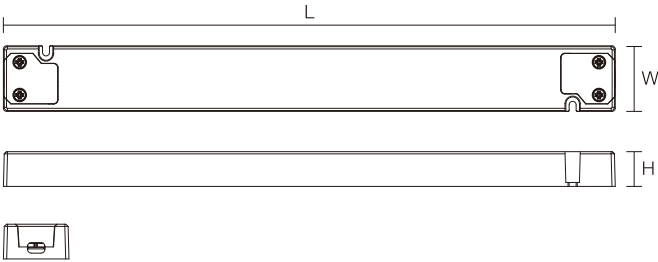

Ultra Small
Cross Section

Features

- Independent super slim design (30x15.9mm cross section)
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- DC input compatible (176-250/280Vdc)
- Suitable for protection class I&II luminaires
- Protection class II

Parameters

Model No	Nominal Voltage	Power Factor	Max. Output	Output Voltage	Output Current	Efficiency Full Load	Ambient Temperature	Max. Case Temperature	Dimensions LxWxH
¹ LT-30-12 V2	220-240V	0.95	30W	12V	0-2.5A	87%	-20...45°C	80°C	280x30x15.9mm
¹ LT-30-24 V2	220-240V	0.95	30W	24V	0-1.25A	87%	-20...45°C	80°C	280x30x15.9mm
¹ LT-40-12 V2	220-240V	0.95	40W	12V	0-3.33A	87%	-20...45°C	80°C	280x30x15.9mm
¹ LT-40-24 V2	220-240V	0.95	40W	24V	0-1.67A	87%	-20...45°C	80°C	280x30x15.9mm
¹ LT-50-12 V2	220-240V	0.95	50W	12V	0-4.17A	87%	-20...45°C	80°C	280x30x15.9mm
¹ LT-50-24 V2	220-240V	0.95	50W	24V	0-2.08A	87%	-20...45°C	80°C	280x30x15.9mm
¹ LT-75-12 V2	220-240V	0.95	75W	12V	0-6.25A	91%	-20...45°C	90°C	305x30x15.9mm
¹ LT-75-24 V2	220-240V	0.95	75W	24V	0-3.12A	92%	-20...45°C	90°C	305x30x15.9mm
¹ LT-100-24 V2	220-240V	0.95	100W	24V	0-4.17A	92%	-20...45°C	90°C	305x30x15.9mm
¹ LT-100-48 V2	220-240V	0.95	100W	48V	0-2.08A	92%	-20...45°C	90°C	305x30x15.9mm
¹ LT-150-12	220-240V	0.95	150W	12V	0-11A	92%	-20...45°C	90°C	335x30x21.6mm
¹ LT-150-24	220-240V	0.95	150W	24V	0-6.25A	93%	-20...45°C	80°C	335x30x21.6mm
¹ LT-150-48	220-240V	0.95	150W	48V	0-3.125A	93%	-20...45°C	80°C	335x30x21.6mm
¹ LT-200-24	220-240V	0.95	200W	24V	0-8.33A	92%	-20...45°C	90°C	335x30x21.6mm
² LT-240-24	220-240V	0.95	240W	24V	0-10A	92%	-20...45°C	90°C	360x32x22.5mm
² LT-240-48	220-240V	0.95	240W	48V	0-5A	92%	-20...45°C	90°C	360x32x22.5mm
² LTU-75-24	110-240V	0.95	75W	24V	0-3.125A	90%	-20...45°C	90°C	320x30x18.2mm

