


UT DNC Series - ON/OFF LED Driver

ON/OFF



Dimensions

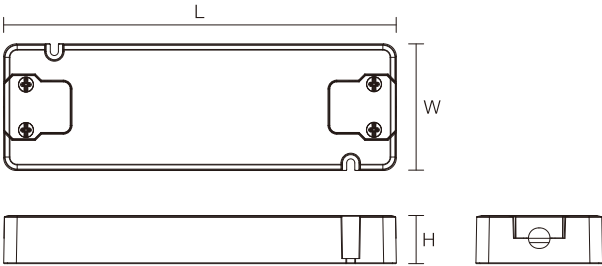

Features

- Independent design
- Complies with Australian "DO NOT COVER" standard
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- DC input compatible (176-280Vdc)
- Suitable for protection class I & II luminaires
- Protection class II

Parameters

Model No.	Nominal Voltage	Power Factor	Max. Output	Output Voltage	Output Current	Efficiency Full Load	Ambient Temperature	Max. Case Temperature	Dimensions LxWxH
*UT-20-24-DNC	220-240V	0.85C	20W	24V	0-0.84A	83%	-20...45°C	85°C	103x36x19mm
*UT-30-24-DNC	220-240V	0.95	30W	24V	0-1.25A	87%	-20...45°C	90°C	155x50x19mm
*UT-40-24-DNC	220-240V	0.95	40W	24V	0-1.67A	88%	-20...45°C	90°C	155x50x19mm
*UT-50-24-DNC	220-240V	0.95	50W	24V	0-2.08A	88%	-20...45°C	90°C	175x58x19mm
*UT-75-24-DNC	220-240V	0.95	75W	24V	0-3.12A	89%	-20...45°C	90°C	175x58x19mm



* Preliminary parameters