


MIW Series - ON/OFF LED Driver

ON/OFF



Dimensions

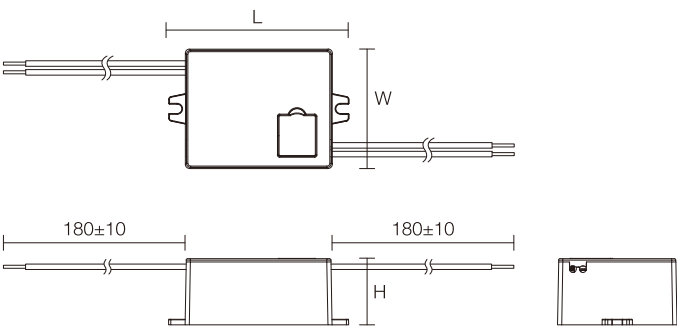

100-277Vac

Features

- Super compact design for built-in use
- Universal AC input (100-277Vac)
- Configurable output current via DIP switch
- Primary and secondary sides come with leads
- Protections: opencircuit, shortcircuit, overload
- DC input compatible (140-280Vdc)
- Seal with glue, the operating temperature up to 60°C
- Suitable for protection class I & II luminaires

Parameters

Model No.	Nominal Voltage	Power Factor	Max. Output	Output Current	Output Voltage	Efficiency Full Load	Ambient Temperature	Max. Case Temperature	Dimensions LxWxH
MIW-10	100-277V	0.90C	10W	250mA	8-40V	83%	-20...60°C	90°C	54x40x24mm
			10W	300mA	8-33V	83%			
			10W	350mA	8-28V	82%			
			10W	500mA	8-20V	81%			
MIW-15	100-277V	0.90C	15W	300mA	12-50V	83%	-20...60°C	90°C	54x40x24mm
			15W	350mA	12-42V	82%			
			15W	500mA	12-30V	81%			
			15W	700mA	12-21V	80%			
MIW-20	100-277V	0.90C	19W	350mA	14-55V	86%	-20...60°C	90°C	65x43x24mm
			20W	500mA	14-40V	85%			
			20W	600mA	14-33V	84%			
			20W	700mA	14-28V	84%			

