


LCM Series - TRIAC Dimming LED Driver



Dimensions

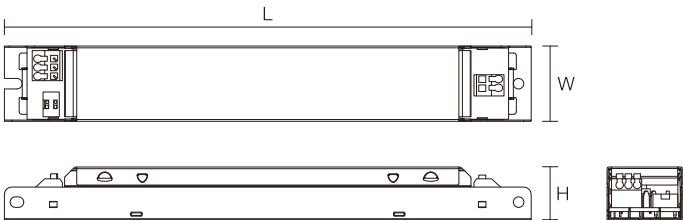

Features

- Super slim design for built- in use
- Dimming with leading edge or trailing edge dimmer
- Smooth dimming compatible with most dimmer
- Dimming range 1...100%
- Configurable output current via DIP switch
- Push wire connections
- Protections: opencircuit, shortcircuit, overload, overtemperature
- DC input compatible (176-280Vdc)
- Suitable for protection class I luminaires

Parameters

Model No.	Nominal Voltage	Power Factor	Max. Output	Output Current	Output Voltage	Efficiency Full Load	Ambient Temperature	Max. Case Temperature	Dimensions LxWxH
LCM-30T	220-240V	0.95	30W	500mA	30-60V	86%	-20...60°C	90°C	210x30x21mm
				600mA	30-50V	86%			
				700mA	30-43V	85%			
				750mA	30-40V	85%			
LCM-40T	220-240V	0.95	40W	800mA	25-50V	86%	-20...60°C	90°C	280x30x21mm
				900mA	25-45V	85%			
				950mA	25-42V	85%			
				1050mA	25-39V	85%			
LCM-50T	220-240V	0.95	50W	1050mA	24-48V	85%	-20...60°C	90°C	280x30x21mm
				1200mA	24-42V	85%			
				1300mA	24-39V	84%			
				1400mA	24-36V	83%			

