


Струбцина F-образная усиленная с быстрым зажимом

	A	B	HxS	L	C		
Артикул	(mm)	(mm)	(mm)	(mm)	(mm)	гр	
60107030160	160	80	16 x 7.5	220	100	2200	6
60107030200	200	120	19.5 x 9.5	297	144	2500	6
60107030250	250	140	25x12	332	195	2800	6
60107030300	300	140	25x12	395	195	3000	6
60107030400	400	120	25x12	495	175	3400	6
60107030500	500	120	25x12	595	175	3700	6
60107030600	600	120	25x12	695	175	4100	4
60107030800	800	120	27x13	875	175	4700	4
60107031000	1000	120	27x13	1095	175	5200	4

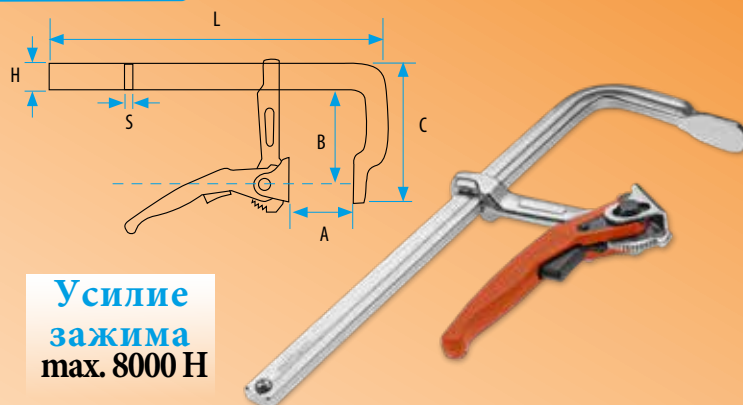


Усилие зажима
max. 8000 Н

Струбцина G-образная кованая

	A	B	E	L	C		
Артикул	(mm)	(mm)	(mm)	(mm)	(mm)	гр	
60104030060	75	61	95	184	39	2200	1
60104030100	100	65	115	220	60	2500	1
60104030150	150	70	130	305	70	2800	1
60104030200	200	125	155	368	78	3400	1
60104030250	250	151	160	443	92	3700	1


Усилие зажима
max. 7000 Н

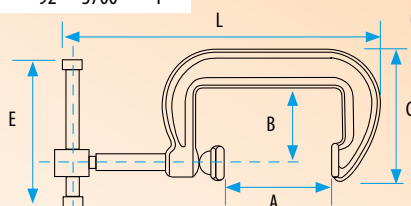

Струбцина G-образная кованая


с медным покрытием для сварочных работ

- Медное покрытие предотвращает прилипание сварочных брызг

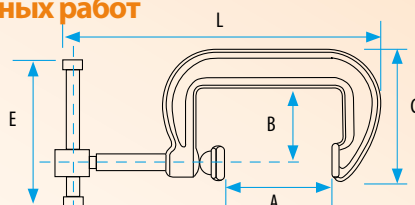


Усилие зажима
max. 7000 Н

	A	B	E	L	C		
Артикул	(mm)	(mm)	(mm)	(mm)	(mm)	гр	
60104035075	75	61	95	184	39	2200	1
60104035100	100	65	115	220	60	2500	1
60104035150	150	70	130	305	70	2800	1
60104035200	200	125	155	368	78	3400	1
60104035250	250	151	160	443	92	3700	1

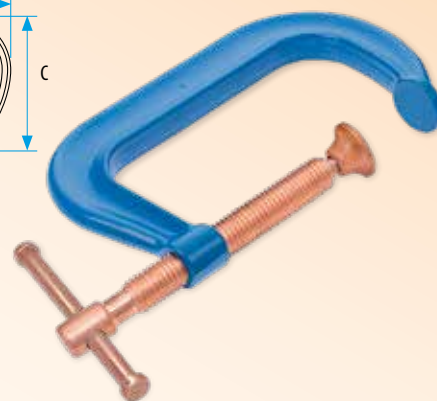

Струбцина G-образная кованая литая

	A	B	E	L	C		
Артикул	(mm)	(mm)	(mm)	(mm)	(mm)	гр	
60104020050	50	39	125	154	39	1200	1
60104020100	100	60	125	215	60	1500	1
60104020150	150	70	125	271	70	1800	1
60104020200	200	78	155	345	78	2100	1
60104020250	250	92	155	402	92	3200	1
60104020300	300	96	155	459	96	3600	1

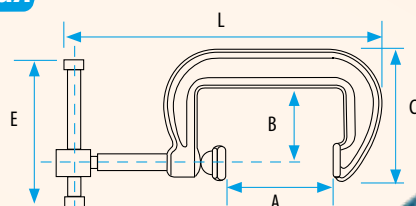

Усилие зажима
max. 7000 Н

