

Pressure gauge tap

151-158-160

/ Function

The gauge holder cock is used combined with a monometer (art. 244) to control the pressure levels in plumbing systems

/ Technical Features:


Max Working Pressure:	16 bar
Max Working Temperature:	
- Water (Art. 158-160):	90°C
- Steam (Art. 151):	230°C
Working fluids:	water and steam

/ Manufacturing Specifications:

Body:	Brass CW 617 N UNI EN 12165
Hardwork fix:	Brass CW 617 N UNI EN 12165
Male:	Brass CW 617 N UNI EN 12164
Washer:	Brass CW 617 N UNI EN 12164
Gasket:	Asbestos free fibre (Art. 158-160) SIGRAFER (Art. 151)
Handle:	PVC cv 25% (Art. 158-160) Brass CW 617 N UNI EN 12164 (Art. 151)



/ Installation Scheme

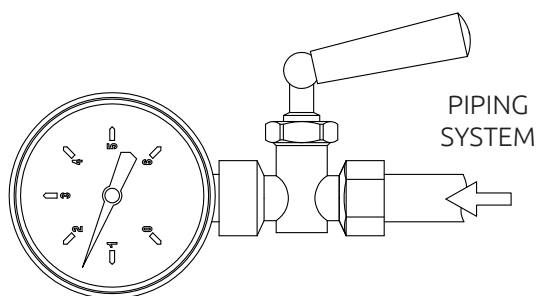


Pressure gauge tap

151-158-160

/ Dimensions


Art. 158 - 159

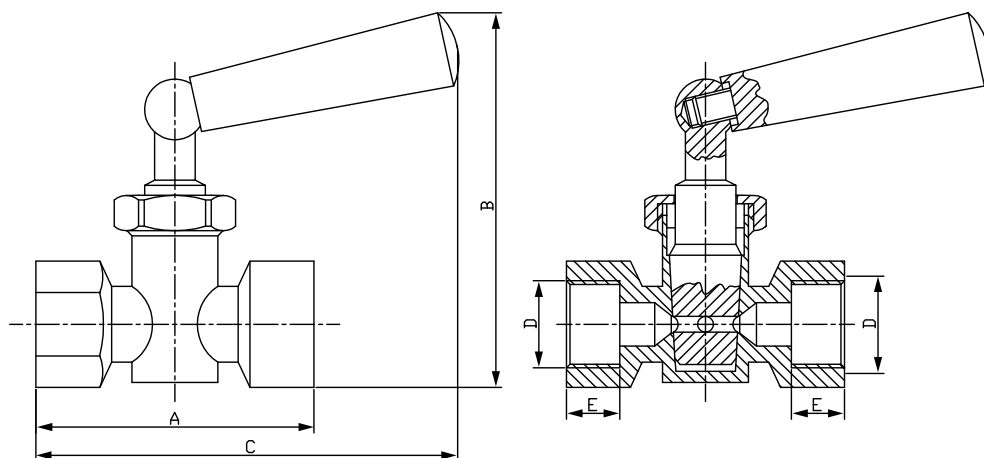

Art.	Code	Finish	Size	A	B	C	D	E
151	90151AB05	Yellow	G 1/4"	46	70	72	1/4	8
151	90151AC05	Yellow	G 3/8"	50	72	74	3/8	12
151	90151AD05	Yellow	G 1/2"	56	74	76	1/2	12

Art.	Code	Finish	Size	A	B	C	D	E
158	90158AB05	Yellow	G 1/4"	46	70	72	1/4	8
158	90158AC05	Yellow	G 3/8"	50	72	74	3/8	12
158	90158AD05	Yellow	G 1/2"	56	74	76	1/2	12

Art. 160

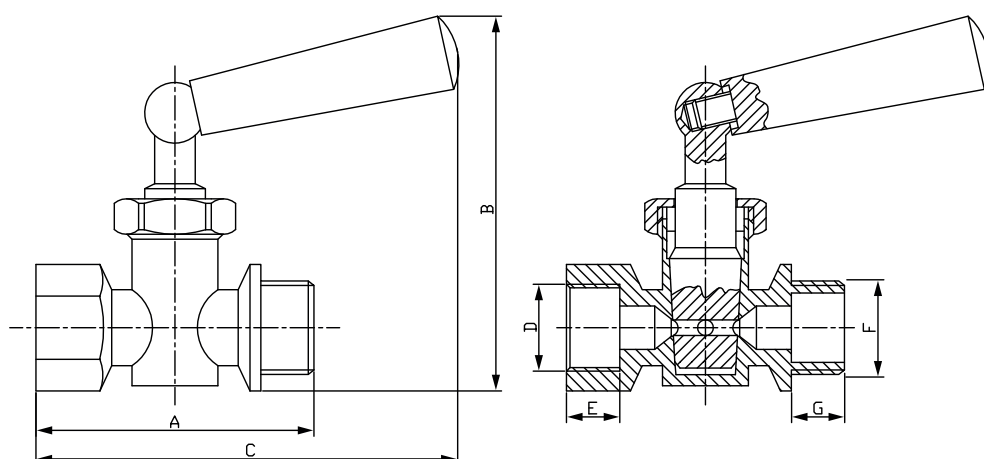

Art.	Code	Finish	Size	A	B	C	D	E	F	G
160	90160AB05	Yellow	G 1/4"	46	70	72	1/4	8	1/4	8
160	90160AC05	Yellow	G 3/8"	50	72	74	3/8	12	3/8	8
160	90160AD05	Yellow	G 1/2"	56	74	76	1/2	12	1/2	10