


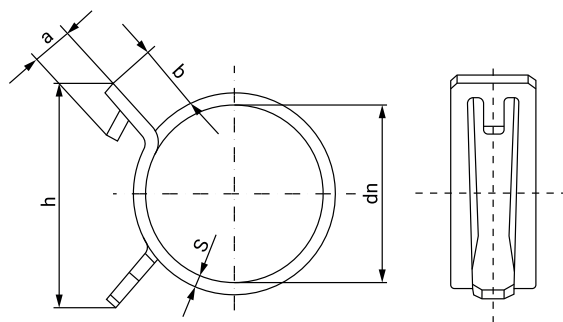


This heavy-duty spring-band clamp is manufactured according to DIN 3021.

It is especially recommended for applications where temperature can vary from -40 °C to +120 °C.

The design of this clamp means that thanks to the elasticity of the material used in its manufacture, it maintains the same radial force despite changes in temperature. It is fast and easy to mount and is also reusable.

MATERIAL: W1 Steel 51 CrV4
FINISH: Black color, CrVI-free
CORROSION RESISTANCE: 720 hours Salt Spray
 ASTM B-117

Part Number	Ø Nominal dn	Bandwidth	Ø Closed	Ø Open	S ±0.4	Load Fixing Min.	a Max.	b Max.	h Max.	Box Quantity	Outer Box Quantity
03031766	13	12	12,0	14,2	0,8	100	9	10	40	200	1.600
03031834	14	12	13,3	15,8	0,8	100	9	10	40	200	1.950
03031777	15	12	13,9	16,5	0,8	130	9	10	40	200	1.600
03031802	16	12	14,9	17,5	0,8	160	9	10	40	200	1.600
03031501	17	12	15,6	18,5	0,8	160	9	10	40	200	1.600
03031812	18	12	16,0	19,0	0,8	200	9	10	40	200	1.600
03031510	19	12	17,8	20,2	1,3	300	9	10	40	200	800
03031528	20	12	18,4	21,6	1,3	200	9	10	40	200	1.600
03031536	21	12	19,4	22,5	1,3	200	9	10	40	200	800
03031538	22	12	20,5	24,2	1,3	200	9	10	40	200	800
03031545	23	12	21,0	24,7	1,3	230	9	10	40	200	800
03031552	24	12	22,0	26,0	1,3	230	9	10	40	200	800
03031560	25	12	23,5	26,8	1,3	260	9	10	40	200	800
03031579	26	12	24,3	28,0	1,7	270	9	10	60	200	800
03031587	27	12	25,2	29,2	1,7	280	9	10	60	200	800
03031593	28	12	26,1	30,2	1,7	300	9	10	60	100	400
03031595	29	12	27,0	31,5	1,7	300	9	10	60	100	800
03031823	30	12	28,0	32,5	1,7	300	9	10	60	100	800
03031616	32	12	29,3	34,5	1,7	300	9	10	60	200	200
03031620	34	12	30,6	36,4	1,7	300	9	10	60	200	200
03031624	35	12	31,5	38,0	1,7	300	9	10	60	200	800
03031632	36	12	32,5	39,0	1,7	300	9	10	60	200	1.600
03031640	38	12	34,5	41,5	1,7	300	9	10	60	200	1.600

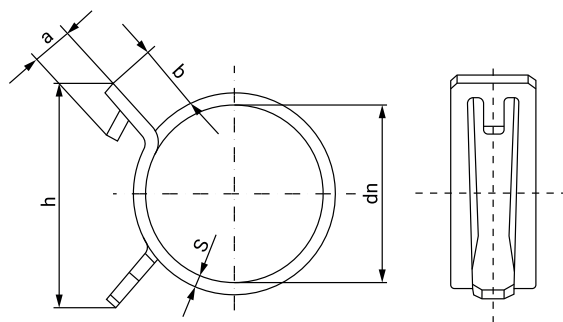

Part Number	Ø Nominal dn	Bandwidth	Ø Closed	Ø Open	S ±0.4	Load Fixing Min.	a Max.	b Max.	h Max.	Box Quantity	Outer Box Quantity
03031667	40	12	35,5	42,5	1,7	300	9	10	60	200	200
03031669	41	12	35,3	43,5	2,1	370	9	10	60	200	800
03031675	42	12	37,2	44,5	2,1	340	9	10	60	100	400
03031691	44	12	38,5	46,5	2,1	340	9	10	60	50	400
03031704	46	12	40,5	48,5	2,1	350	9	10	60	100	400
03031712	47	12	41,4	50,0	2,1	380	9	10	60	100	400
03031719	49	12	42,5	52,0	2,1	410	9	10	72	50	200
03031720	50	12	43,5	53,0	2,1	410	9	10	72	100	400
03031739	51	12	44,0	54,0	2,1	410	9	10	72	100	400
03031747	53	12	46,0	55,8	2,1	410	9	10	72	50	200
03031755	55	12	46,8	58,0	2,1	430	9	10	72	100	400