
	Product Information XST50-125/40	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	Maksim Sokolov
		Contact	+79059301333

Part NO.	50003848
----------	----------

Product Picture	Note
	<p>Water supply: Water filtration and transportation, the main pipeline pressurization; Pressurization for high-rise buildings, hotels, etc.</p> <p>Industry: Flushing and cleaning system, boiler feed water, cooling water circulation, water treatment system, equipment supporting system.</p> <p>water treatment: Ultrafiltration system, reverse osmosis system, distillation system, separator, swimming pool.</p> <p>Other: Air conditioning system; heating system; agricultural irrigation, fire fighting system</p>

Nameplate parameters

flow	60 m ³ /h
head	18 m
Efficiency	78 %
speed	2900 rpm
number of stages	1

Technical

Flow range (m ³ /h)	6-72m ³ /h
Curve tolerance	ISO 9906 Annex A
Maximum lift (m)	24m
Maximum Altitude	1000m



Material

Impeller	HT200/06Cr19Ni10
Pump inlet	HT200
Pump shaft	
Fan cover	08F
O-ring	NBR
Rear end cover	ZL102
Connector	HT200
Fan	PP
Cover box	ABS
Supporting foot	HT200
Guard plate	

Working conditions


Medium temperature (°C)	-10°C+85°C
Max. ambient temperature (°C)	+40°C
Pumped medium	Liquid without solid particles and long fiberslow viscositynon-combustiblenon-corrosion liquid or other
Critical cavitation margin(m)	3m
Working pressure	12bar

Installation

Structure Type	Non-standard motor (Coaxial)
Connection method	Flange connection / thread-connection
Inlet diameter (mm)	DN65
Outlet diameter (mm)	DN50

Motor

Motor phase	Three phase
-------------	-------------

	Product Information XST50-125/40	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	Maksim Sokolov
		Contact	+79059301333

Protection class	IP54
Motor poles	2
Insulation class	F
Motor power (KW)	4kW
Motor model	XST32-200/40
Frequency	50Hz
Rated voltage (V)	380V
Rated current (A)	9.34A
Efficiency class	
Power factor	
Seal	
Mechanical seal	TF PB20-22
Weight/Packaging	
Net weight (kg)	54kg
Gross weight (kg)	61kg
Package size	580x295x405mm





Performance Curve


XST50-125/40

Manufacturer	LEO
Address	China,Zhejiang,Wenling
Contact	0576-89988888
Date	2023/06/18
Client Name	LEO Sibir LLC
Client Addr.	Novosibirsk
Contacts	Maksim Sokolov
Contact	+79059301333

Project Name

Item NO

The hydraulic performance curve have been tested with Clean Water at 20°C, density 1000kg/m³, and at 1bar atmospheric pressure. GB32162016 Grande 3B

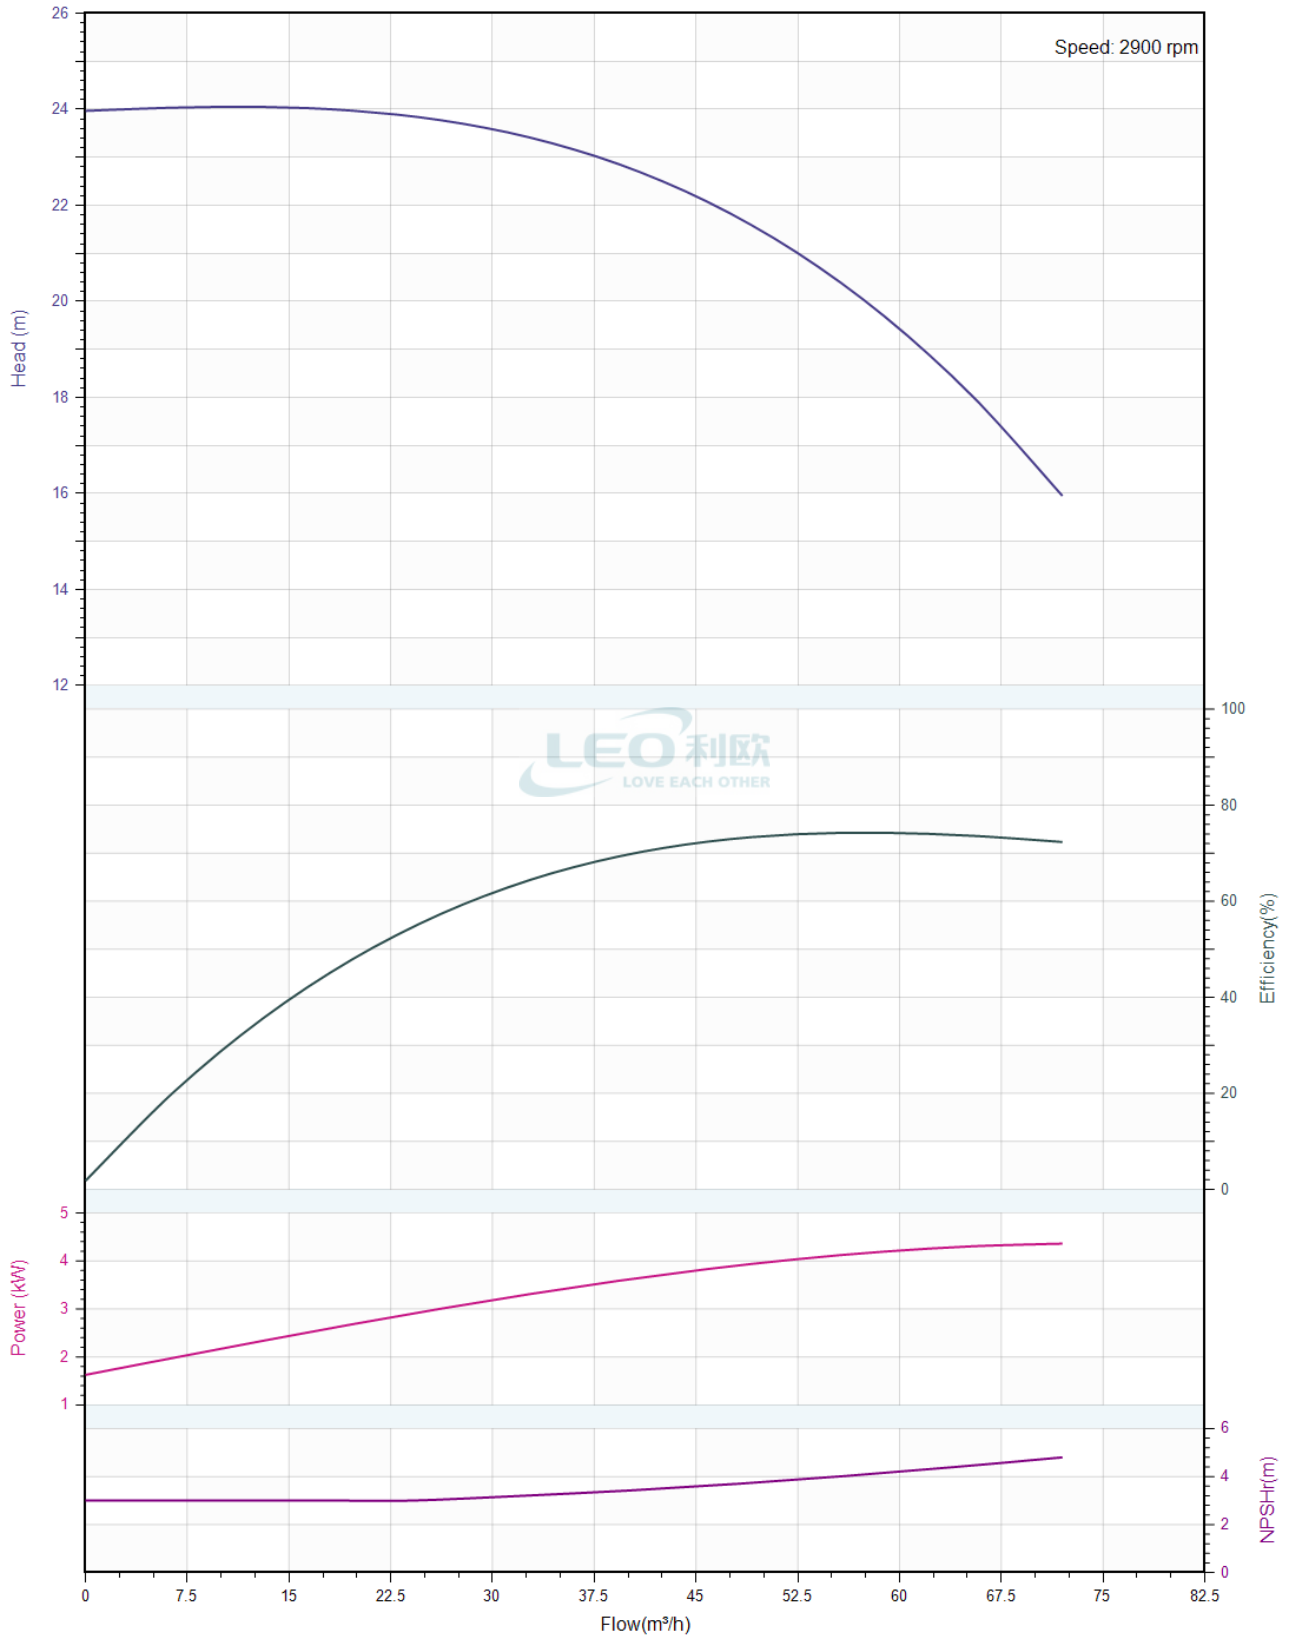




Pump Technical Parameters


XST50-125/40

Manufacturer	LEO
Address	China,Zhejiang,Wenling
Contact	0576-89988888
Date	2023/06/18
Client Name	LEO Sibir LLC
Client Addr.	Novosibirsk
Contacts	Maksim Sokolov
Contact	+79059301333

Project Name	
Item NO	

Rated parameters	
Pump model	XST50-125/40
Part NO.	50003848
Rated flow	60 m ³ /h
Rated head	18 m
Rated efficiency (%)	78
Power (kW)	3.77
NPSHr (m)	3
Speed (rpm)	2900
Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m ³)	1000
Viscosity (mm ² /s)	1

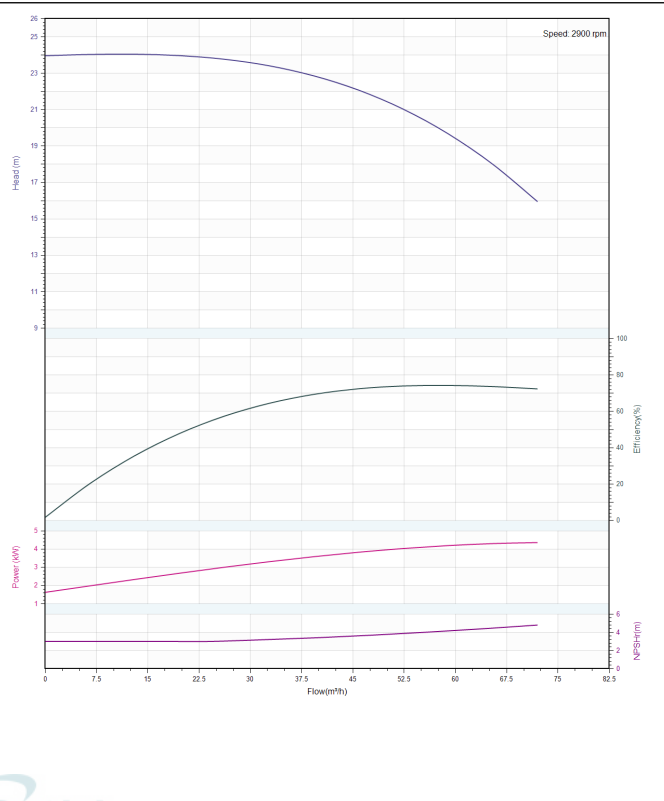

	Order Data XST50-125/40	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/06/18
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	Maksim Sokolov
		Contact	+79059301333

Pump model XST50-125/40

Part NO. 50003848

Product price

Quantity 1

Total price

Inquiry notes

