

	Product Information LPP150-12.5-11/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Part NO.	LPP150-12.5-11/4		
Product Picture		Note	
		: CFD	

Nameplate parameters

flow	200 m ³ /h
head	12.5 m
speed	1480 rpm
number of stages	1

Technical

Curve tolerance	ISO9906 AnnexA
Maximum lift (m)	16
Minimum usage flow (m ³ / h)	20
Maximum use flow (m ³ / h)	260



Material

Impeller	HT200
Pump inlet	HT200
Pump shaft	AISI304
Mechanical seal	SiC/C
O-ring	NBR

Working conditions

Max. ambient temperature (°C)	40
Max. liquid temperature (°C)	90
Pumped medium	
Working pressure	16bar

Installation

Inlet & Outlet Diameter	DN150
Connection standard	DIN


Motor

Motor phase	Three phase
Protection class	IP55
Motor poles	4
Insulation class	F
Motor power (KW)	11KW
Frequency	50
Rated voltage (V)	380
Rated current (A)	21.5121263303721
Efficiency class	IE3
Power factor	0.85


	Product Information LPP150-12.5-11/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

Drive end bearing	7309
Non-drive end bearing	6309
Efficiency (%)	91.4
Weight/Packaging	
Gross weight (kg)	338
Package size	1200*870*650
	

	Performance Curve LPP150-12.5-11/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

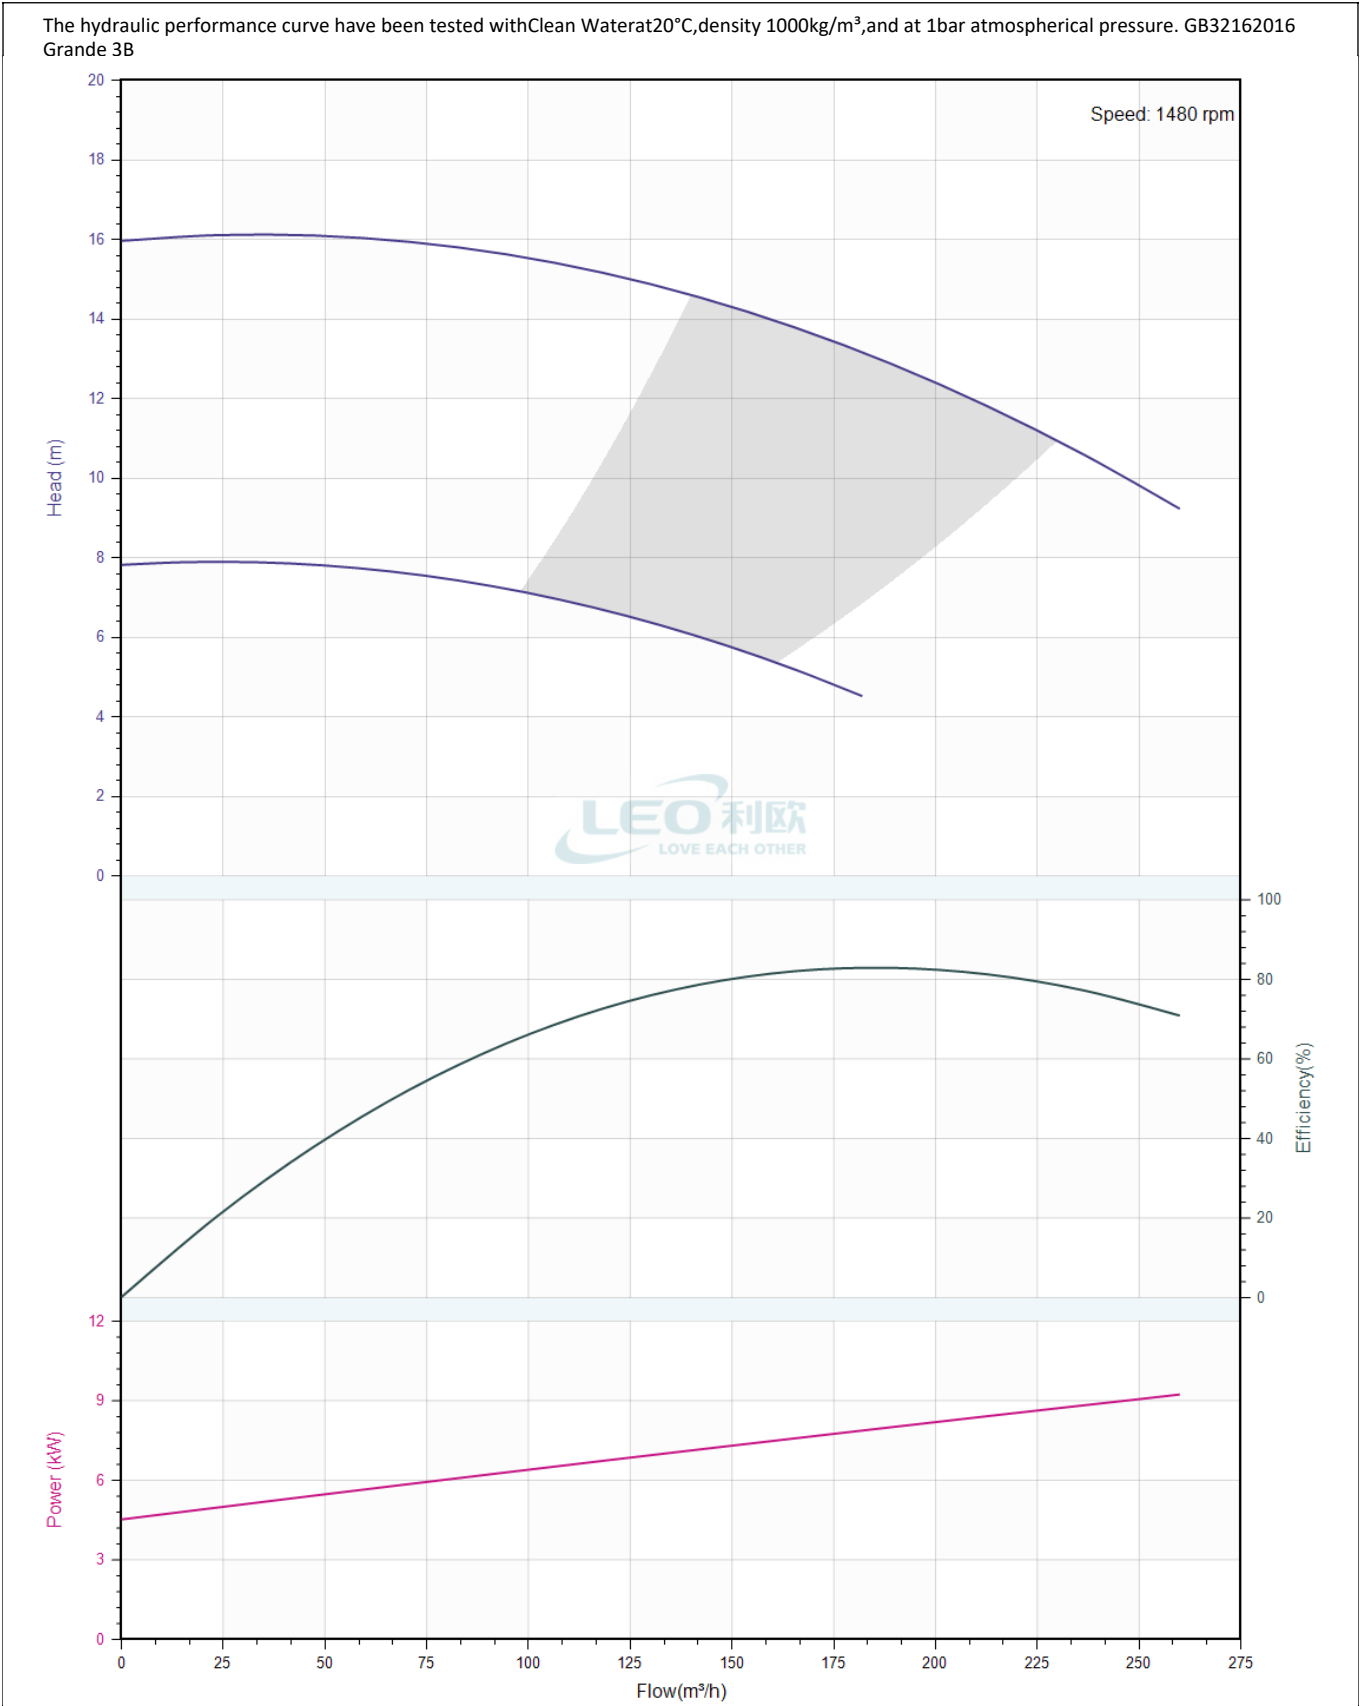

	Pump Technical Parameters LPP150-12.5-11/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

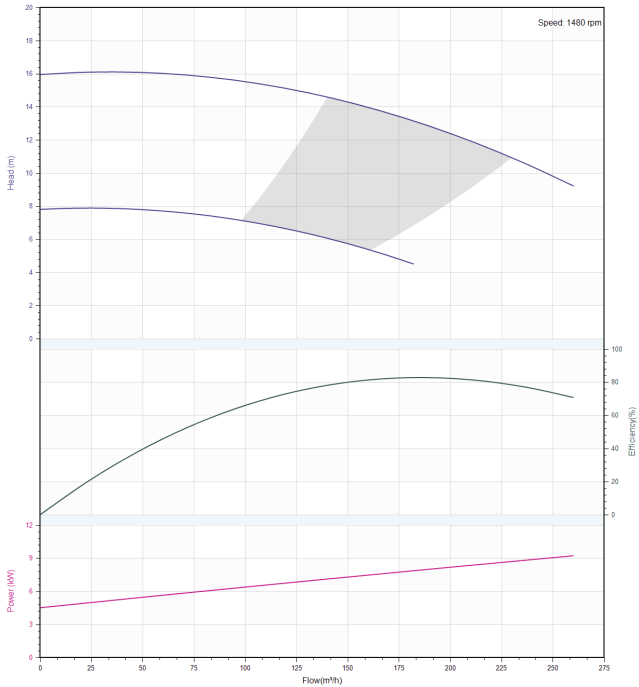Rated parameters			
Pump model	LPP150-12.5-11/4		
Part NO.	LPP150-12.5-11/4		
Rated flow	200 m³/h		
Rated head	12.5 m		
Rated efficiency (%)	82.6		
Power (kW)	8.25		
Speed (rpm)	1480		
Max impeller diameter (mm)	225		
Medium			
Pumped medium	Clean Water		
Working temperature (°C)	20		
Medium density (kg/m³)	1000		
Viscosity (mm²/s)	1		



	Installation picture LPP150-12.5-11/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	
		Date	
Project Name		Client Name	LEO Sibir LLC
		Client Addr.	Novosibirsk
Item NO		Contacts	
		Contact	

