
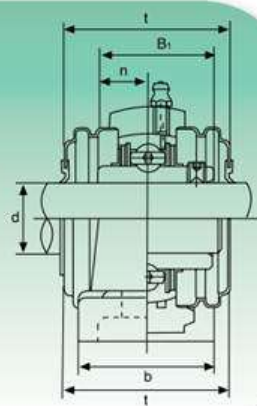
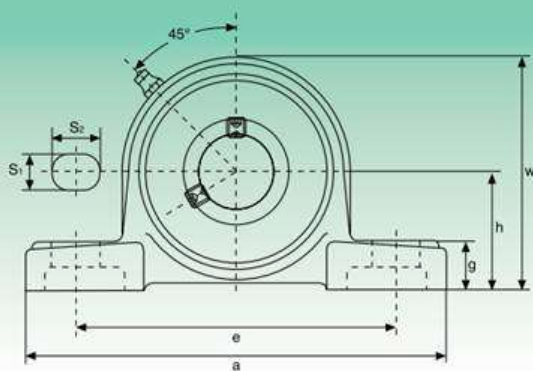


Tipo Type	Diametro Diameter	Tolleranza max. ammissibile n. giri Max rpm.			
UC-SB	mm	j7	h7	h8	h9
201	12	6700	5900	4300	1600
202	15	6700	5500	4000	1500
203	17	6700	5300	3800	1400
204	20	6700	4900	3500	1250
205	25	5600	4100	2900	1050
206	30	4700	3400	2400	880
207	35	4000	3000	2100	760
208	40	3600	2600	1900	680
209	45	3300	2400	1700	620
210	50	3000	2200	1600	570
211	55	2700	2000	1400	510
212	60	2400	1800	1250	460
213	65	2300	1700	1150	420
214	70	2200	1600	1100	400
215	75	2000	1500	1000	380
216	80	1900	1400	960	350
217	85	1800	1300	900	330
218	90	1700	1200	840	310
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-

Tipo Type	Diametro Diameter	Tolleranza max. ammissibile n. giri Max rpm.			
UC-SB	mm	j7	h7	h8	h9
305	25	5000	3700	2600	940
306	30	4300	3100	2200	800
307	35	3800	2800	2000	720
308	40	3400	2500	1700	640
309	45	3000	2200	1500	560
310	50	2700	2000	1400	500
311	55	2500	1800	1300	470
312	60	2300	1700	1150	430
313	65	2100	1500	1100	400
314	70	2000	1400	1000	370
315	75	1800	1300	930	340
316	80	1700	1250	870	320
317	85	1600	1150	810	300
318	90	1500	1100	760	280
319	95	1400	1000	720	260
320	100	1300	940	660	240
321	105	1250	900	630	230
322	110	1200	830	590	210
324	120	1100	750	530	190
326	130	1000	680	480	180
328	140	900	620	440	160

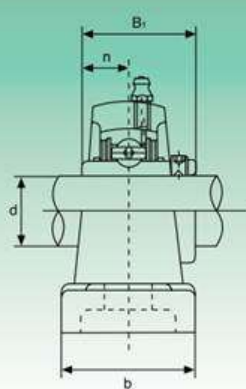

Typ Tun	Abmessungen - Размеры												Bef.Bolz. Креп. винт	Tragzahlen (N) Коэффициент нагрузки (H)		Lager Подшипник	Gehäuse Корпус	Gewicht Вес
	d	h	a	e	b	S ₁	S ₂	g	w	t	B ₁	n		dynamisch C Динамическая C	statisch C ₀ Статическая C ₀			
	mm/Zoll - мм/дюйм													mm/Zoll - мм/дюйм				kg
UCP201	12	30,2	127	95	38	13	19	14	62	44,5	31	12,7	M10	12160	6318	UC201	P203	0,69
UCP201-8	¾	13/16	5	3¾	1½	½	¾	9/16	27/16	1¾	1,2205	0,500	3/8			0,69		
UCP202	15	30,2	127	95	38	13	19	14	62	44,5	31	12,7	M10	12160	6318	UC202	P203	0,69
UCP202-9	9/16	13/16	5	3¾	1½	½	¾	9/16	27/16	1¾	1,2205	0,500	3/8			0,69		
UCP202-10	5/8	13/16	5	3¾	1½	½	¾	9/16	27/16	1¾	1,2205	0,500	3/8			UC202-10		0,69
UCP203	17	30,2	127	95	38	13	19	14	62	44,5	31	12,7	M10	12160	6318	UC203	P203	0,68
UCP203-11	11/16	13/16	5	3¾	1½	½	¾	9/16	27/16	1¾	1,2205	0,500	3/8			0,67		
UCP204	20	33,3	127	95	38	13	19	14	65	44,5	31	12,7	M10	12160	6318	UC204	P204	0,66
UCP204-12	¾	15/16	5	3¾	1½	½	¾	9/16	29/16	1¾	1,2205	0,500	3/8			0,66		
UCP205	25	36,5	140	105	38	13	19	15	71	48	34,1	14,3	M10	13300	7457	UC205	P205	0,81
UCP205-13	13/16															UC205-13		0,85
UCP205-14	7/8	17/16	5½	41/8	1½	½	¾	19/32	225/32	157/64	1,3425	0,563	3/8			UC205-14		0,83
UCP205-15	15/16															UC205-15		0,82
UCP205-16	1															UC205-16		0,81
UCP206	30	42,9	165	121	48	17	20	17	84	53	38,1	15,9	M14	18525	10735	UC206	P206	1,24
UCP206-17	11/16															UC206-17		1,27
UCP206-18	11/8	111/16	6½	4¾	17/8	43/64	25/32	21/32	35/16	25/64	1,5000	0,626	½			UC206-18		1,26
UCP206-19	13/16															UC206-19		1,24
UCP206-20	1¼															UC206-20		1,23
UCP207	35	47,6	167	127	48	17	20	18	93	59,5	42,9	17,5	M14	24415	14630	UC207	P207	1,58
UCP207-20	1¼															UC207-20		1,64
UCP207-21	15/16	17/8	69/16	5	17/8	43/64	25/32	45/64	321/32	211/32	1,6890	0,689	½			UC207-21		1,61
UCP207-22	13/8															UC207-22		1,58
UCP207-23	17/16															UC207-23		1,55
UCP208	40	49,2	184	137	54	17	20	18	100	69	49,2	19	M14	27645	16910	UC208	P208	1,89
UCP208-24	1½	115/16	7¼	513/32	21/8	43/64	25/32	45/64	315/16	223/32	1,9370	0,748	½			UC208-24		1,93
UCP208-25	19/16															UC208-25		1,90
UCP209	45	54,0	190	146	54	17	20	20	106	69	49,2	19	M14	32395	20235	UC209	P209	2,14
UCP209-26	15/8															UC209-26		2,24
UCP209-27	111/16	21/8	715/32	5¾	21/8	43/64	25/32	25/32	411/64	223/32	1,9370	0,748	½			UC209-27		2,20
UCP209-28	1¾															UC209-28		2,14
UCP210	50	57,2	206	159	60	20	23	21	113	74,5	51,6	19	M16	33345	22135	UC210	P210	2,66
UCP210-29	113/16															UC210-29		2,78
UCP210-30	17/8	2¼	81/8	6¼	23/8	25/32	29/32	53/64	429/64	215/16	2,0315	0,748	5/8			UC210-30		2,73
UCP210-31	115/16															UC210-31		2,68
UCP210-32	2															UC210-32		2,64