
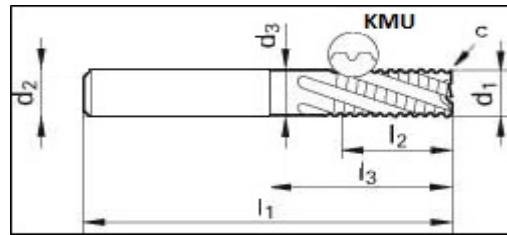




Фрезы. Каталог 2022

Артикул	Вид обработки
C006	черновая



P	M	K	N	S	H
●	○	●		○	○

Артикул-Ø	d1 h10	d2 h6	d3	l1	l2	l3	c x 45°
C006-6,0	6,0	6,0	5,7	57,0	13,0	20,0	0,3
C006-8,0	8,0	8,0	7,7	63,0	19,0	26,0	0,3
C006-10,0	10,0	10,0	9,5	72,0	22,0	30,0	0,3
C006-12,0	12,0	12,0	11,5	83,0	26,0	36,0	0,5
C006-16,0	16,0	16,0	15,5	92,0	32,0	42,0	0,5
C006-20,0	20,0	20,0	19,5	104,0	38,0	52,0	0,5
C006-25,0	25,0	25,0	24,0	121,0	45,0	63,0	0,6

Возможен заказ дробных диаметров с параметрами большего табличного значения.
При заказе указывать: артикул, диаметр, тип хвостовика (HA/HB). Пример: C006-10,0-HA.

Режимы резания

Материалы																					
P		M		K		N		S		H		Ød1		Vc		fz		ap		ae	
≤ 850 N/mm²	850 ≥ 1400 N/mm²	≤ 750 N/mm²	≥ 750 N/mm²	≤ 240 HB	≥ 240 HB30	≤ 3% Si	≤ 7% Si	≤ 1300 N/mm²	≥ 1300 N/mm²	≤ 54 HRC	≤ 63 HRC	(мм)	(м/мин)	(мм/з)	(мм)	(мм)	(мм)	(мм)	(мм)	(мм)	
●	●											6,0	180	160	0,025	0,025	12,00	12,00	3,00	2,40	
●	●											8,0	180	160	0,035	0,035	16,00	16,00	4,00	3,20	
●	●											10,0	180	160	0,045	0,045	20,00	20,00	5,00	4,00	
●	●											12,0	180	160	0,050	0,050	24,00	24,00	6,00	4,80	
●	●											16,0	180	160	0,065	0,065	32,00	32,00	8,00	6,40	
●	●											20,0	180	160	0,080	0,080	40,00	40,00	10,00	8,00	
●	●											25,0	180	160	0,120	0,120	50,00	50,00	12,50	10,00	
					●							6,0		160		0,025		12,00		2,40	
					●							8,0		160		0,035		16,00		3,20	
					●							10,0		160		0,045		20,00		4,00	
					●							12,0		160		0,050		24,00		4,80	
					●							16,0		160		0,065		32,00		6,40	
					●							20,0		160		0,080		40,00		8,00	
					●							25,0		160		0,120		50,00		10,00	

- рекомендованное применение
- возможное применение